

# RRD2

2" RECESSED LED DOWNLIGHT

Effortless  
Lighting Solutions



**NICOR**<sup>®</sup>




# RRD2

## 2" Recessed LED Downlight System

The RRD2 LED Downlight allows you to bring general ambient lighting into a space with small, architectural exposure. The high-performing light engine with off-board driver allows for more flexible installations and an increased lifetime with improved thermal management. The RRD2 offers two wattage levels along with round and square trims in flanged and flange-less designs to fit any space. It uses a plenum-rated cable connector to link the downlight module to the remote driver box and then pops into place with its adjustable, spring-loaded retention tabs for a secure fit. This eliminates the need for a junction box or recessed housing. Adding ambient or accent lighting in areas such as living rooms, hallways, art niches and display cases is now easier than ever.


### Dimensions

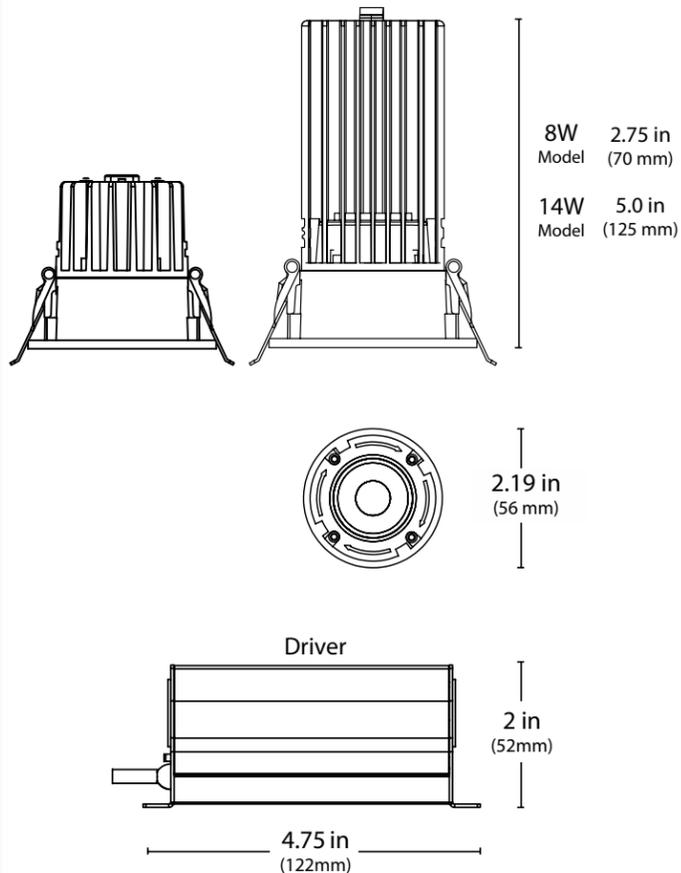

# FEATURES


### Trim Designs

Our trim-mounted spring clips makes installation effortless. Opt for the mud rings for a sleek, trimless look. Each available in Black, White, Round, and Square.

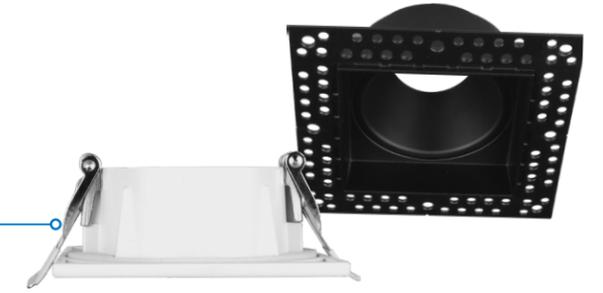



### Compact Aluminum Light Engine

Our anodized aluminum junction box is designed to fit easily within ceiling cut-outs. The anodized aluminum provides optimal heat dissipation over traditional steel junction boxes.

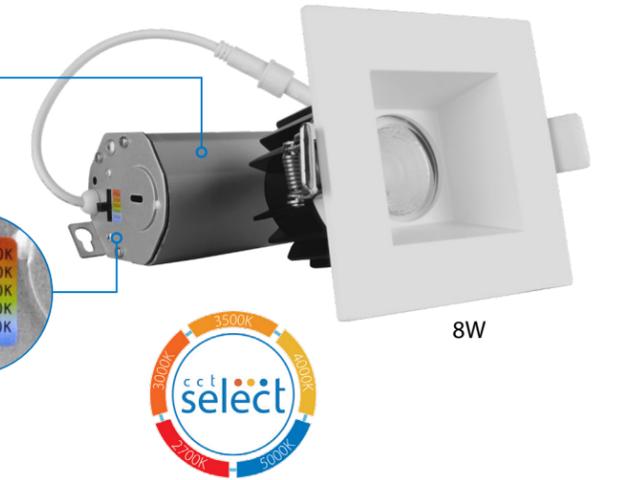

### Selectable CCT

Offered in 5 Selectable Color Temperatures of 2700K, 3000K, 3500K, 4000k, & 5000K

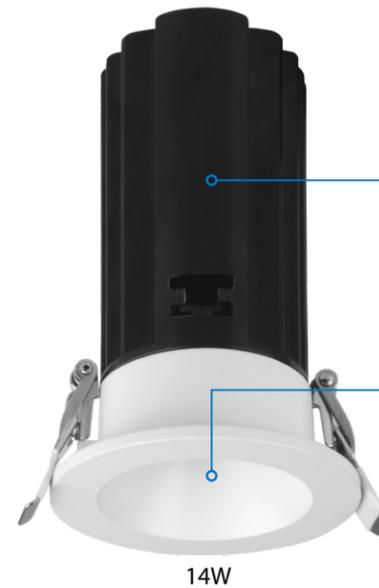

### Multiple Configurations

The RRD2 is available in both 8W and 14W options, each compatible with 8 unique trims and 2 accessory optics (24° and 60°)

### Energy Star Certified Efficiency

The RRD2 achieves 82 lumens/W with a 5CCT-select COB, meeting the latest Energy Star Downlight 1.0 standards

Ordering Information										Example: RRD2108120S9TRRDWH	
Series	Diameter	Version	Wattage	Input VAC	CCTs	CRI	Style	Shape	Finish Color		
RRD	2	1	08 (8 Watt)	120	S (Select: 27K/30K/35K/40K/50K)	9 (90+)	TR (Flanged)	RD (Round)	WH (White)		
			14 (14 Watt)				MR (Mud Ring)	SQ (Square)	BK (Black)		

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.

Accessories	<i>sold separately</i>
RRD210P24	24° Optic
RRD210P60	60° Optic
ROUGHIN-TEMPLATE-2	2" Rough In Template

Recommended Dimmers*
Lutron Skylark SCL-153P
Lutron DIVA DVELV-303P
LEVITON C22-06672-1LW



\*Not a complete list. Check compatibility before installation



**WAREHOUSE LOCATIONS:**

Albuquerque, NM  
Buford, GA  
Roseville, CA

NICOR Lighting  
2200 Midtown Place NE Albuquerque, NM 87107 USA | [www.nicorlighting.com](http://www.nicorlighting.com) | T. 800-821-6283 F. 800-892-8393

