

NEW!

12VDC

FineLine 2.0

4.4W/ft.
(14.4W/m)

330 Lumens
per ft.
(1082 per meter)



Pencil thin but still packing a big punch, FineLine is the unobtrusive way to provide stunning lighting to casework, displays, store fixtures and more. The low-profile design features a milk diffuser for even illumination, Luniform technology, and with optional manual or remote-control dimmers, creating the perfect atmosphere is effortless.

Features:

Miniature Profile – 5/16" (8 mm)

120° beam angle

*Luniform output – no "dots"

Available in (4) lengths – 8" (203 mm), 12" (305 mm), 22" (559 mm), or 34" (864 mm)

Linkable

79" (2 m) starter cord included

Surface mount

Typical Applications:

Shelving

Displays or store fixtures

Interior and under cabinets

Food service equipment

Closets (UL listed for use within closet storage spaces)







Available Finishes:




Aluminum (AL)

*Fixture may require a slight angle using included swivel clips to eliminate diode reflection on some surfaces

Dimensions:

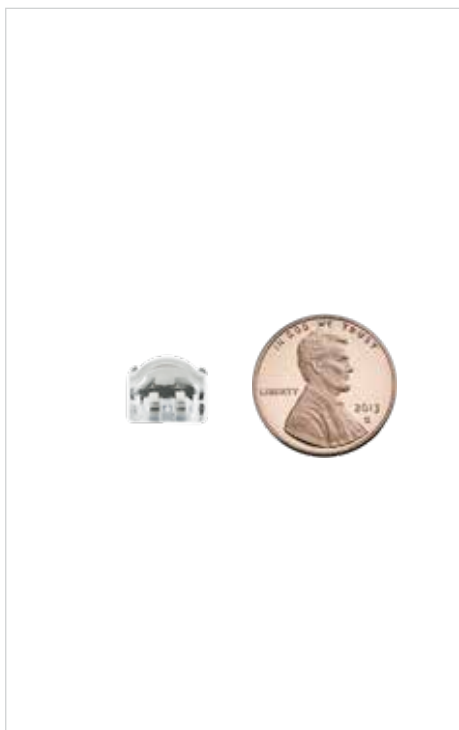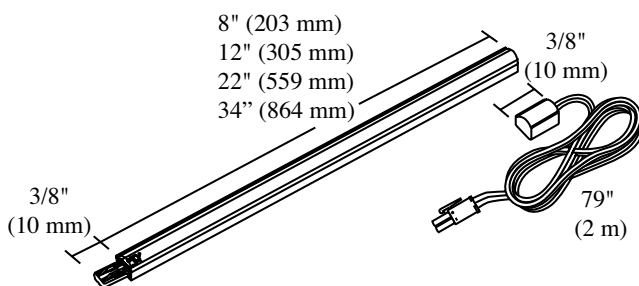

Extremely thin, 5/16" (8 mm)
low-profile design

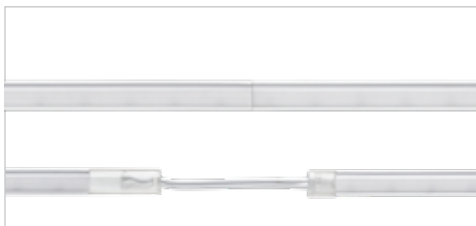


Linkable (seamless back-to-back or link cord) up
to 12 ft. (3.66 m) continuous run




Straight and adjustable mounting
U-clips included




Typical Setup:

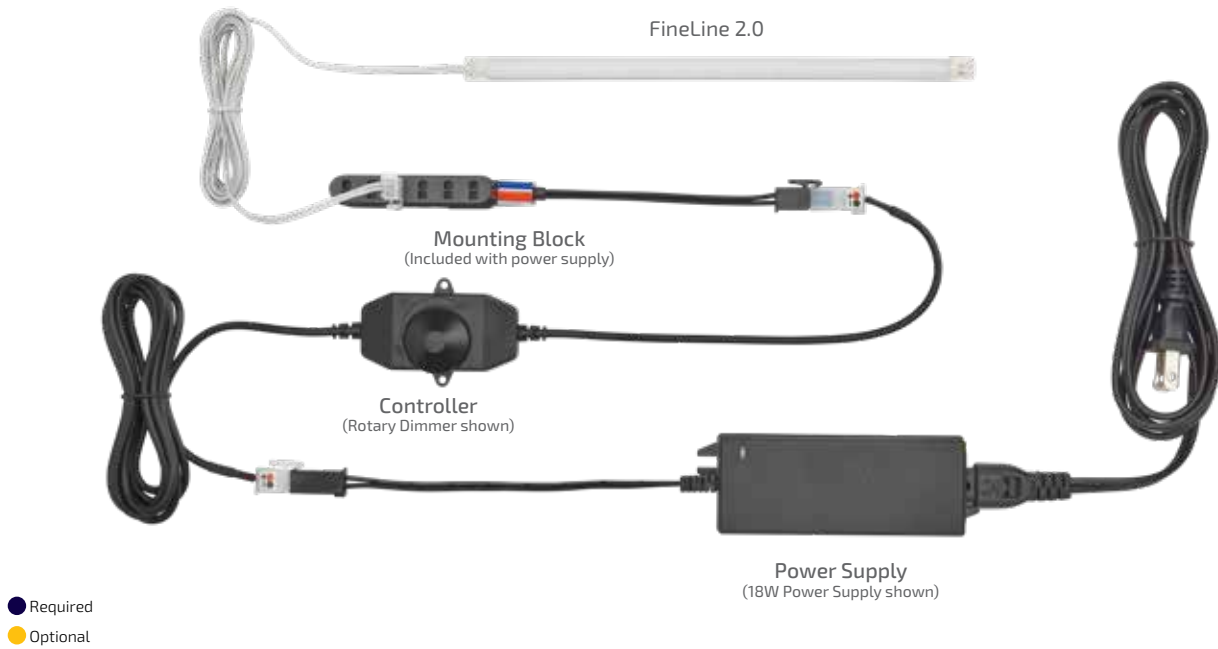

Accessories:

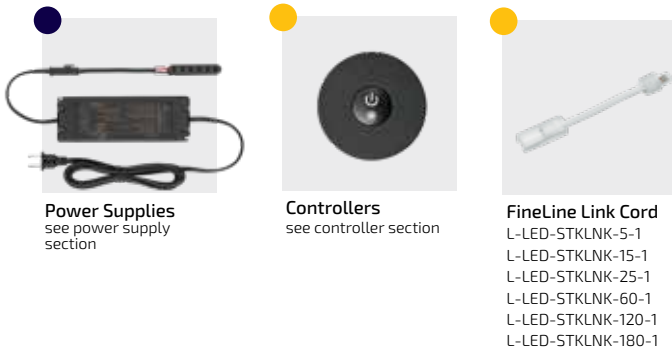

Specifications:

Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per 60W Power Supply	Max Continuous Run	Mounting	Warranty	Beam Angle												
4.4W/ft. (14.4W/m)	330 per ft. (1082 per m)	75	12VDC	50,000 Hours	13' (4 m)	12' (3.66 m)	Surface	5 Year													
Photometric Data					Color Temperature																
<div><table><thead><tr><th>Height</th><th>Light Output</th><th>Beam Area</th></tr></thead><tbody><tr><td>1ft (.3 m)</td><td>279Fc (3003.1lx)</td><td>3.4ft L x 3.6ft W (1 m L x 1.1 m W)</td></tr><tr><td>3ft (.9 m)</td><td>31.0Fc (333.6lx)</td><td>10.3ft L x 10.8ft W (3.1 m L x 3.3 m W)</td></tr><tr><td>6ft (1.8 m)</td><td>7.75Fc (83.4lx)</td><td>20.5ft L x 21.6ft W (6.2 m L x 6.6 m W)</td></tr></tbody></table></div> <div>L-STKH034-CNI-1 Tested</div>					Height	Light Output	Beam Area	1ft (.3 m)	279Fc (3003.1lx)	3.4ft L x 3.6ft W (1 m L x 1.1 m W)	3ft (.9 m)	31.0Fc (333.6lx)	10.3ft L x 10.8ft W (3.1 m L x 3.3 m W)	6ft (1.8 m)	7.75Fc (83.4lx)	20.5ft L x 21.6ft W (6.2 m L x 6.6 m W)	<div><div><div>Warm White</div><div>Warm to Neutral</div><div>Cool White</div><div>Daylight</div></div><div><div>2700K3000K4500K5500K6500K</div><div><div>▲ Warm (3000K)</div><div>▲ Cool (5000K)</div></div></div></div>				
Height	Light Output	Beam Area																			
1ft (.3 m)	279Fc (3003.1lx)	3.4ft L x 3.6ft W (1 m L x 1.1 m W)																			
3ft (.9 m)	31.0Fc (333.6lx)	10.3ft L x 10.8ft W (3.1 m L x 3.3 m W)																			
6ft (1.8 m)	7.75Fc (83.4lx)	20.5ft L x 21.6ft W (6.2 m L x 6.6 m W)																			

See page 64 for part numbers and descriptions