

**NICOR®**



 color GREEN RED  
**select**

**EXL23** LED EDGE LIT EXIT SIGN

# EXL23 · LED EDGE LIT EXIT SIGN



CLEAR



MIRROR

## PRODUCT INFORMATION

- Input Voltage (VAC) 120-277
- Input Power (W) 2
- Emergency Operation 90 Minutes



# APPLICATIONS

The EXL2v3 LED Edge-Lit Exit Series features a contemporary design with ease of installation in mind. The pivoting driver case allows for wall, ceiling, stairwell, or end-mount installation all in one, dependable package. Constructed of impact-resistant acrylic, choose from a clear single-faced panel or a mirrored universal panel. High output LEDs deliver an indirect, evenly illuminated edge-lit exit sign with exceptional light distribution and a maintenance-free nickel-cadmium battery for long life. The EXL2v3 Series also offers field adjustable chevrons for universal configuration based on your application's directional needs.

### Construction

- ABS plastic housing
- Driver case pivots ±90° around center for wall, ceiling, & stairwell installation
- Impact resistant acrylic panel
- Single face clear panel
- Universal face mirror panel. Ships as a single face, but removal of adhesive cover will allow for double face applications.

### Electrical

- Maintenance-free NiCad battery provides 90-minute emergency operation
- 120-277 VAC
- Fully-illuminated 6" letter height with 3/4" stroke
- Convenient button allows selection of red or green LED lettering
- LED Indicator Light & Self-Test Push Button Switch
- Damp Location Rated
- Operating temperature: 32°F - 104°F (0°C - 40°C)


### Mounting and Installation

- Mounting plate allows for J box mounting with ceiling, wall or end-mount applications
- Field-installable, removable chevron directional indicators (with mounting template) for all configurations
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel


### Finish

- Silver finished housing
- Available with clear (single faced) or mirrored backing (single or double face)

### Dimensions

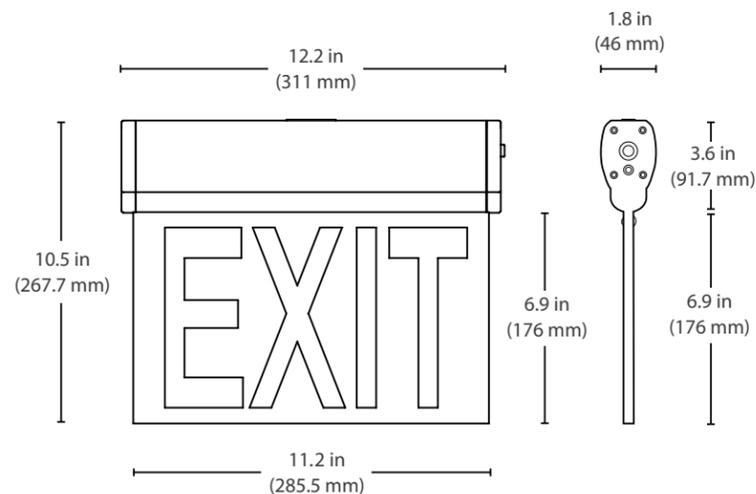

## FEATURES

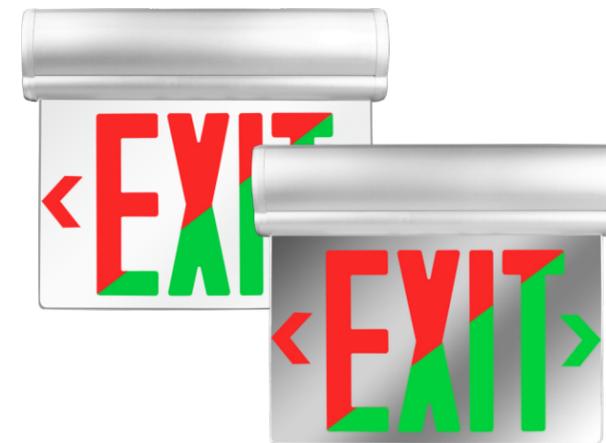

- Color Select (Choose between Red or Green LED)
- Available in both Clear and Mirror Faces
- Double-Face option available by removing pre-applied mirror sheet



- ±90° Adjustable Mount for wall, ceiling, or stairwell applications
- Integrated test button with indicator light

### Ordering Information

Example: EXL23UNVCLSSV

Series	Version/Voltage	Legend Background	Number of Sides	Letter Color	Housing Color
EXL2	3UNV (Version 3,120-277VAC)	CL (Clear)	S (Single - Clear Only)	S (Selectable Red/Green)	SV (Silver)
		MR (Mirrored)	U (Universal - Mirror Only)		WH (White) <sup>1</sup>

See spec-sheet for additional ordering information. 1) Contact factory for MOQ and lead time





©2025 NICOR® • ALL RIGHTS RESERVED

## Warehouse Locations

Albuquerque, NM

Buford, GA

Roseville, CA

T. 800-821-6283 F. 800-892-8393

NICOR Lighting  
2200 Midtown Place NE Albuquerque, NM 87107 USA | [nicorlighting.com](http://nicorlighting.com)