

WLR

Lamp Ready Wrap

Product Description

The WLR LED Lamp Ready Wrap is an energy-efficient alternative to traditional fluorescent Wrap fixtures. It offers the flexibility to install the desired wattage and color temperature LED T8 Type-B (ballast free) double end lamps to meet the needs of the application. Designed for surface mount installation, the WLR is perfect for retail, manufacturing, warehouse, office, education, low-bay, or general lighting applications.

Construction

- Durable steel construction
- Smooth formed sides for safe handling
- Tombstone (flip-up socket) rotates and locks in place

Optical System

- Frosted PMMA lens with prismatic texture
- G13 Bulb base

Electrical

- Input Voltage: 120–277 VAC
- For use with double-ended wiring (Type B) LED T8 tubes;
- Max Lamp Wattage: 22W per lamp
- Shunted tombstone contacts for double-ended (DEP) wiring

Mounting and installation

- Quick and easy single person installation
- Designed for surface mount
- Lamps not included

Listings

- cULus 1598 Listed for damp locations
- RoHS Compliant

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

Project

Catalog

Type

Date



WLR Lamp Ready Wrap Type B, Double End



NICOR®

WLR


Lamp Ready Wrap

Ordering

Ordering Information						Example: WLR14U2LT8BWH
Series	Version	Length	Voltage	Lamp Number	Lamp Type	Color
WLR	1 (Version 1)	4 (4 feet)	U (120-277V)	2L (2 lamps)	T8B (T8 Type B lamp)	WH (White)

Specifications and dimensions subject to change without notice.

Dimensions

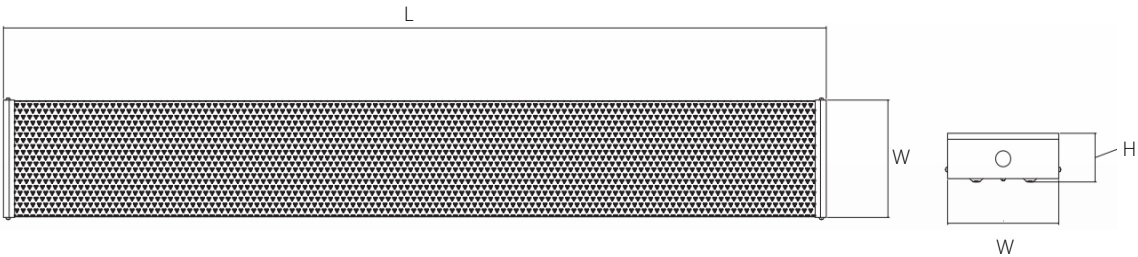

Product Measurements	
Length:	48.1 in. (1222mm)
Width:	9.84 in. (250mm)
Height:	3.54 in. (90mm)

