

Metallic Fixture Whips

Reduced Wall Galvanized Steel Flexible Conduit



Conduit

- Reduced Wall Galvanized Steel Flexible Metal Conduit

Conductors

- Solid or Stranded Copper

Conductor Insulation

- THHN/THWN: 14 AWG & 12 AWG
- TFN: 18 AWG & 16 AWG

Neutral Conductors

- White 120/208V

Grounding

- Insulated Green Copper Grounding Conductor¹

References & Rating



- UL 66, 83 and 514B, File No. E96572
- NEC® 348
- Made in USA of US and/or imported materials

Maximum Temperature Rating

- 90°C (Dry)

Maximum Voltage Rating

- 600V

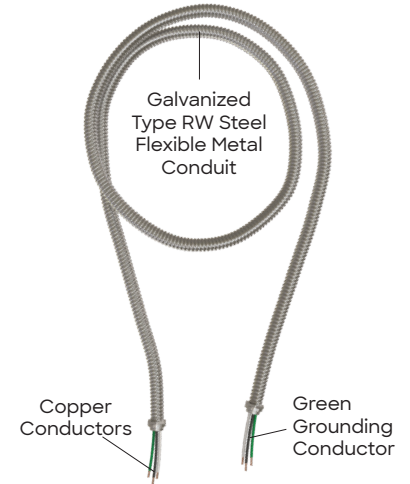

Conductor Trade Size (Color)	Conduit Trade Size x Length (ft)	Product Code	
		30 Units Per Package	100 Units Per Package
Solid			
18-4 Solid (Black, White, Red, Green)	3/8 x 6	4523-21	4523-30
18-3 Solid (Black, White, Green)	3/8 x 6	4522-21	4522-30
16-4 Solid (Black, White, Red, Green)	3/8 x 6	4513-21	4513-30
16-3 Solid (Black, White, Green)	3/8 x 6	4512-21	4512-30
14-4 Solid (Black, White, Red, Green)	3/8 x 6	4503-21	4503-30
14-3 Solid (Black, White, Green)	3/8 x 6	4502-21	4502-30
12-4 Solid (Black, White, Red, Green)	3/8 x 6	4580-21	4580-30
12-3 Solid (Black, White, Green)	3/8 x 6	4579-21	4579-30
12-2 Solid (Black, White)	3/8 x 6	---	4578-30
Stranded			
18-3 Stranded (Black, White, Green)	3/8 x 6	4622-21	4622-30
16-3 Stranded (Black, White, Green)	3/8 x 6	4612-21	4612-30
14-3 Stranded (Black, White, Green)	3/8 x 6	4602-21	4602-30
12-3 Stranded (Black, White, Green)	3/8 x 6	4679-21	4679-30

Note: Special orders are subject to lead times and minimum order quantities.
 3/8" whips have screw in die cast connectors on the 18 AWG, 16 AWG & 14 AWG and set screw die cast for the 12 AWG.
 Available with customer specified connectors by special order.
 All whips are available in barrels and cartons.
¹Two wire configuration do not have an insulated green copper grounding conductor.