


NICOR®

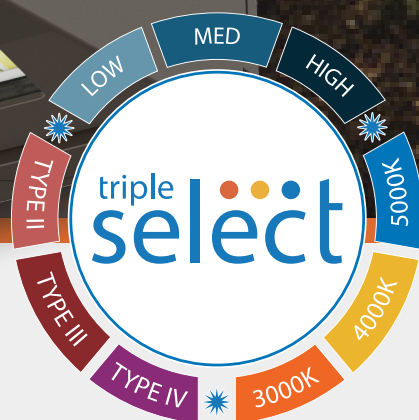


OWF5 | Full Cut-Off LED Wall Pack

OWF5

Full Cut-Off LED Wall Pack

Introducing the OWF5 Full Cut-Off LED Wallpack – a cutting-edge lighting solution that seamlessly combines classic architectural style with enhanced performance and a sleek new slim factor. Designed to minimize visual obstruction, the slim profile ensures a spacious and open atmosphere for buildings or outdoor areas. Boasting an impressive output of up to 178 lumens per watt, the OWF5 provides uniform light distribution and reduced glare through its Type II, Type III, Type IV distribution precision lens. It is easy to install on walls or directly on a J-Box with its included mounting bracket. The Triple Select models feature an internal switch for CCT adjustment (3000K, 4000K, 5000K), Wattage control (low, med, high) and Selectable distribution (Type II, Type III, Type IV). Ideal for perimeter lighting, building entrances, walkways, and various commercial spaces, the OWF5 sets a new standard for versatile, high-performance general-purpose lighting solutions.

Dimensions

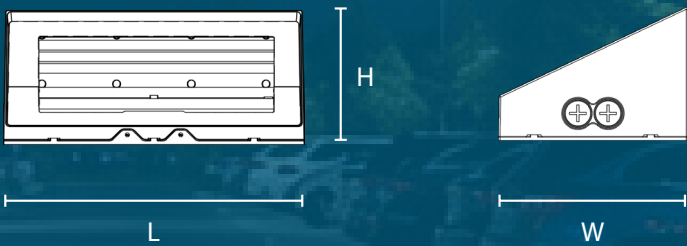


Dimensions			
Series	Length (L)	Width (W)	Height (H)
OWF5040S	8.3 in (211 mm)	6.69 in (170mm)	5.43 in (138mm)
OWF5100S	13.34 in (339 mm)	8.26 in (210mm)	5.56 in (149mm)
OWF5150S	16.93 in (430 mm)	10.63 in (270mm)	7.13 in (181mm)



FEATURES


Field-Adjustable

Two side caps give quick access to all settings, including photocell on/off, without opening the fixture.

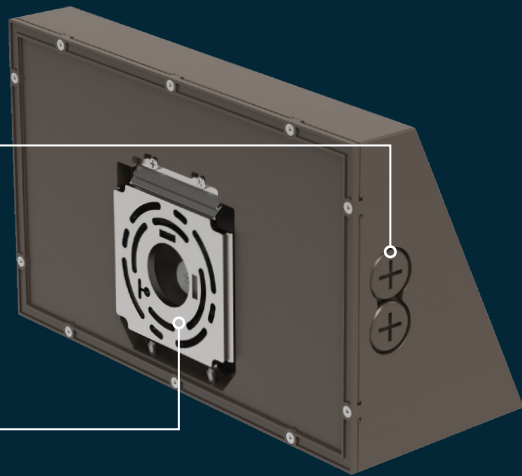

Fast & Simple Installation

Installs quickly with basic tools and a slide-and-lock mount secured by two Allen screws.

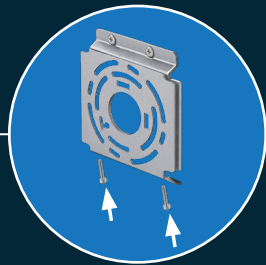

Built to Last


A die-cast aluminum housing, stainless steel hardware, and a UV-stabilized bronze finish stand up to the elements.

High-Efficiency Performance

Up to 178 lm/W efficiency with 80+ CRI, and dependable operation -40°F to 113°F.

Select the Perfect Light

Select the Perfect Light — Triple-select technology gives the OWF5 up to 27 configurations of wattage, color temperature, and distribution, letting you match light output precisely to the space instead of settling for a fixed, one-size-fits-all fixture.

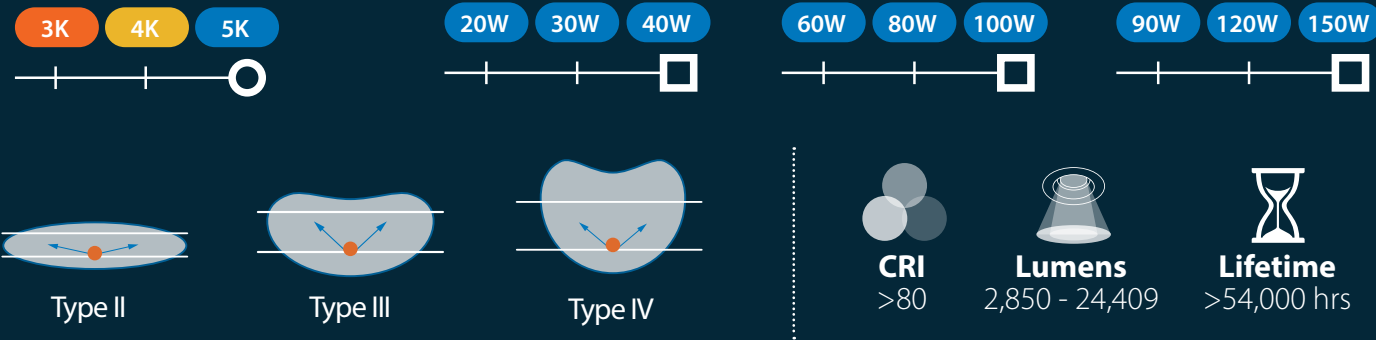

Ordering Information								Example: OWF5100SUS8BZS
Series	Version	Wattage	Voltage	CCTs Select	CRI	Finish	Sensor Socket	Emergency
OWF	5	040S (20/30/40W)	U (120-277V)	S (3K/4K/5K)	8	BZ (Bronze)	S (12V 3.5mm Socket)	_ (None)
		100S (60/80/100W)						E1 (4W EM back-up)
		150S (90/120/150W)						E2 (8W EM back-up)
								E3 (16W EM back-up)

E1 option only available on 040S model.
E3 option only available on 150S model
Specifications and dimensions subject to change without notice.



Warehouse Locations

Albuquerque, NM · Buford, GA · Roseville, CA