

NICOR[®]




OWCR Round LED Wall-Mount Cylinder

OWCR

Round LED Wall Mount Cylinder

The new OWCR LED Wall Mount Cylinder delivers optimal performance over 95 lumens per watt in an attractive, contemporary design. Ideal for porches, walls, columns, office spaces, restaurants, clubs, walkways and other residential or commercial applications where ambient illumination is desired, the OWCR uses tempered glass to create uniform up, down, or full light distribution free of hot spots or glare. The fixture features a detachable mounting plate for easy mounting to J-Boxes and surface mounting.

Dimensions

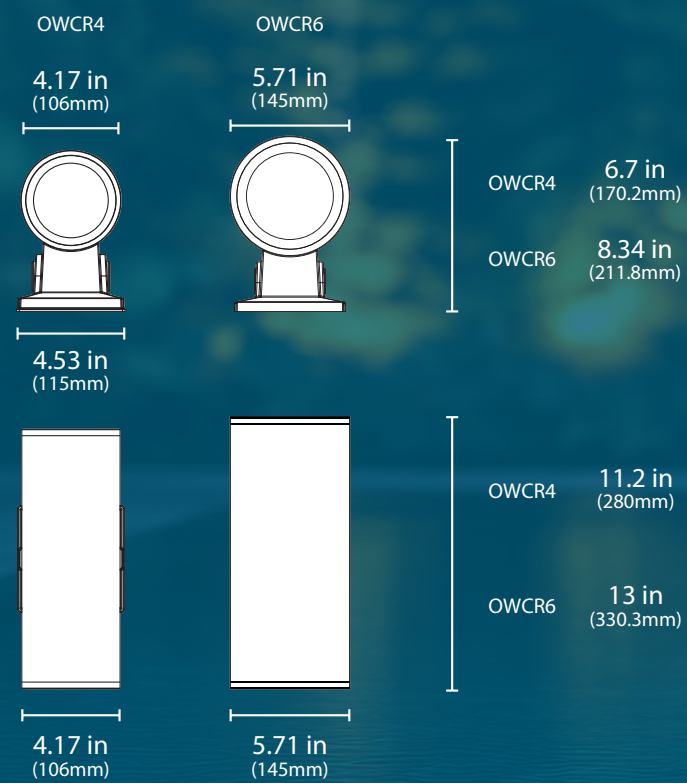

FEATURES



Field Swappable Reflectors

40° optics included. Interchangeable 25° and 60° optics available.

Photocell Control


Integrated photocell with easy on/off switch for adaptable lighting control

Selectable Lighting Direction

Choose up, down or up/down with the flick of a switch

Select the Perfect Light

The OWCR Round LED Wall-Mount Cylinder features selectable wattage and color temperature options via an integrated switch located on the backside.



CRI 90	Lumens 1800-2975	Lifetime >60,000 hrs	Beam Angle 40°
------------------	----------------------------	--------------------------------	--------------------------



Ordering Information Example: OWCR6235SUS940BZ

Series	Distribution	Version	Wattage	Voltage	CCTs	CR	Optic	Finish
OWCR	4 (4 inch)	2 (Version 2)	20S (12/16/20W)*	U (120-277)	S (30/40/50K)	90 (90 CRI)	40 (40 degree)	BZ (Bronze)
			35S (22/29/35W)**				25 (25 degree)***	
	6 (6 inch)						60 (60 degree)***	

See spec-sheet for additional ordering information. *Only available in 4" fixture **Only available in 6" fixture ***Contact NICOR for leadtime



©2025 NICOR® • ALL RIGHTS RESERVED

Warehouse Locations

Albuquerque, NM
Buford, GA
Roseville, CA

2200 Midtown Place NE Albuquerque, NM 87107 USA
nicorlighting.com
T. 800-821-6283 F. 800-892-8393