




## IMPORTANT SAFEGUARDS !

WHEN USING ELECTRICAL EQUIPMENT, BASIC SAFETY PRECAUTIONS SHOULD ALWAYS BE FOLLOWED, INCLUDING THE FOLLOWING:

1. Do not mount near gas or electric heaters.
2. Cannot use the electric generator to test the LED lights.
3. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
4. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
5. Do not use this equipment for other than its intended use.
6. The installation must only be performed by a licensed electrician.
7. To prevent death, injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.
8. Disconnect power before installing the product or servicing it.
9. Wait until fixture has cooled down before installing or servicing the fixture.
10. Please do not install the fixture when it is raining to prevent electric shock and avoid failure.
11. Please wear gloves as needed to avoid injury before installation.

**SAVE THESE INSTRUCTIONS  
READ AND FOLLOW ALL SAFETY INSTRUCTIONS**


### What's In The Box






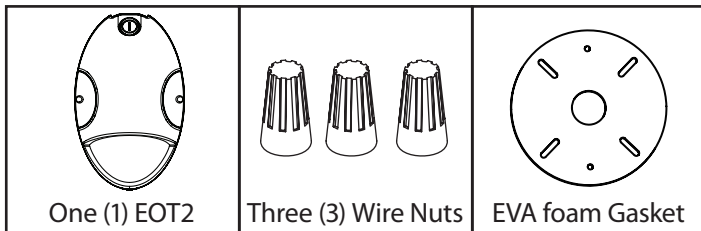


### Tools Needed


A screwdriver, drill, a pair of wire strippers, and fasteners appropriate for the mounting surface will be needed to install the EOT2.



 *Make sure all power is turned off before beginning installation*

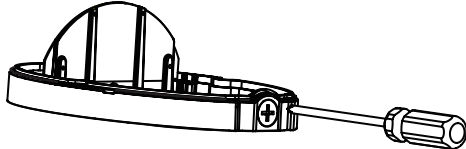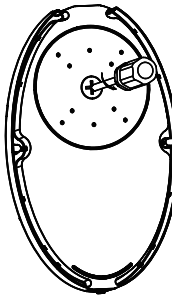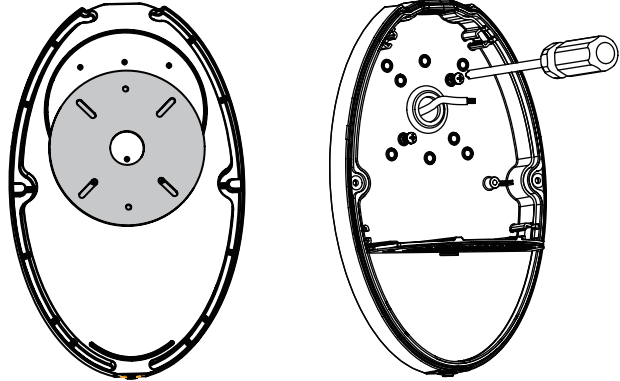
<p><b>1</b> Carefully unpack fixture from packaging and inspect for any damage caused in shipping.</p> 	<p><b>2</b> Ensure that power is turned off at appropriate circuit breaker.</p>  <p><b>3</b> Locate desired positioning for the fixture on the mounting surface.</p>
<p><b>4</b> Gently remove the rubber plug to access the screws. Then, carefully loosen the two screws using an appropriate tool.</p> 	<p><b>6</b> Remove the yellow sticker and carefully position the EVA foam onto the designated round area of the bottom plate. Once aligned, press firmly to adhere the foam. Using screwdriver remove appropriate knockouts and secure the bottom plate to the junction box or wall surface using the appropriate screws.</p>
<p><b>5</b> Remove the Appropriate 1/2-Inch Knockout: <b>Option 1:</b> Locate the knockout at the top of the fixture and remove it using a screwdriver. <b>Option 2:</b> Locate the knockout at the back of the fixture and remove it using a screwdriver.</p>   <p><b>Option 1</b> <span style="margin-left: 200px;"><b>Option 2</b></span></p>	

**7** To connect the wire to the power input line, use the three provided connectors. Please refer to the wiring diagram on the right for detailed instructions and ensure proper alignment for secure and correct installation.


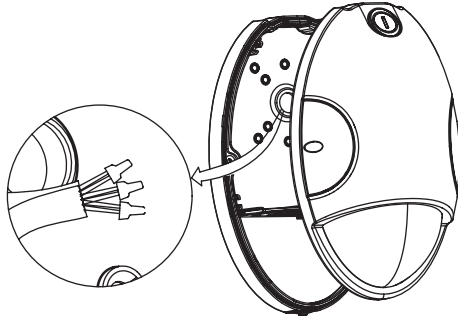


### Standard Wiring Diagram for AC Models

Check the cable label for the wire color of DIM+ and DIM-

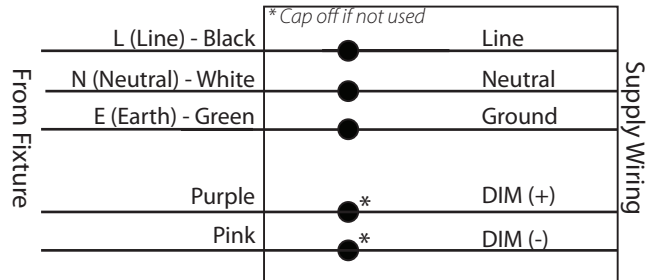


**8** Confirm that all wiring corrections and CCT selections are made properly then install the fixture onto fixture backplate and secure it tightly using screws removed in step 4. Reinstall the rubber screw hole plugs. Turn AC power on and check fixture for proper operation.

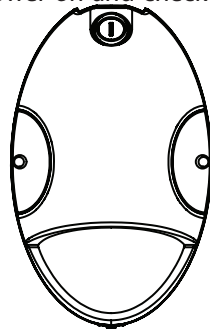

### Standard Wiring Diagram for Emergency Models

Check the cable label for the wire color of DIM+ and DIM-

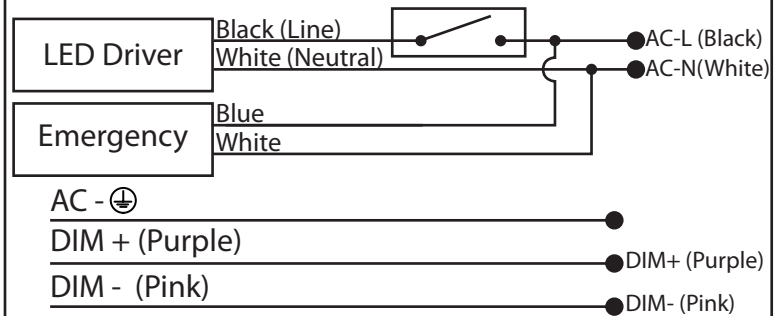


## Optional Features

### Optional: Instructions for changing CCT temperature.



To adjust the CCT, first ensure the power is off.

- Unscrew the face cover of the fixture.
- Turn the dial to the desired CCT setting (3500K, 4000K, 5000K, )
- Return and secure the face cover accordingly.

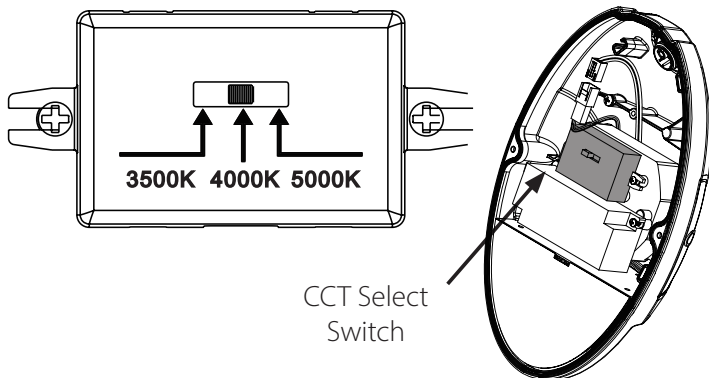

### Optional: Disconnecting or enabling the Photocell


To enable the photocell control function, plug the Black and Black wiring connector to the photocell module.

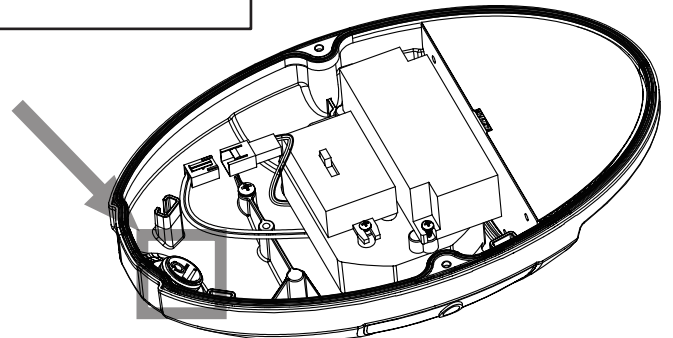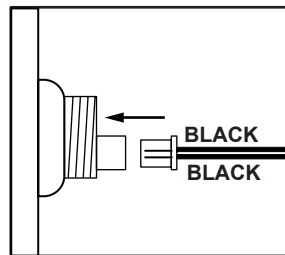

Note: Photocell is disabled by default.


### For Emergency and Emergency Cold Weather Models

Ensure that the battery is securely connected to guarantee the proper functioning of the emergency backup driver when needed.

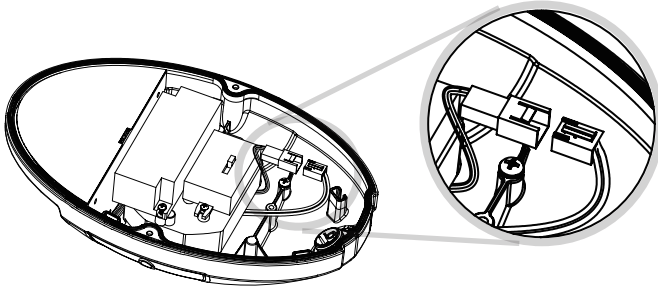

### Emergency Test Button Switch

RED LED on test button indicates battery is charging properly. Push button to test emergency battery pack operation.

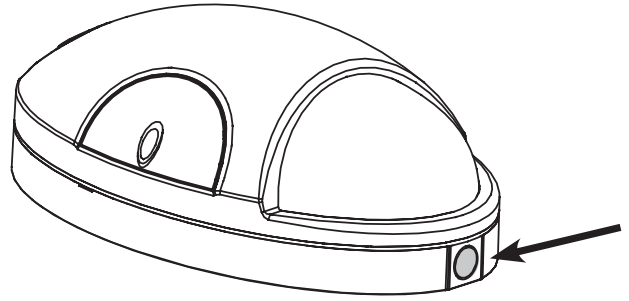

Subject to the exclusions below, each NICOR LED product, including the LED electronics and components of a property installed NICOR LED product, will be free from defect in materials and workmanship for a period of five (5) years from the original date of purchase. The product shall be considered defective only if 10% or more of the product's LED components fail. NICOR LED product warranty covers the following performance criteria: LED Light Output will be maintained above 70% of initial output; LED color temperature will not shift more than 200K in CCT; LED driver will operate within NICOR specifications; and the fixture finish, excluding natural aluminum or brass products, will not exhibit cracking, peeling, excessive fading, or corrosion during the warranty period. Exceptions apply as defined in NICOR's product specification sheets, which are incorporated by reference herein.

This limited warranty is provided to you, the purchaser of the product identified on Seller's invoice, as your exclusive remedy and applies only to NICOR products that have been purchased from an authorized NICOR Distributor; the product was new and in an unopened NICOR package at the time of installation; and the NICOR product was installed by a licensed electrician or under the supervision of a licensed electrician and used by consumers in the United States or Canada when accompanied with this warranty. This warranty extends only to the first consumer purchaser and is not transferable. A consumer wishing to invoke the terms of this limited warranty must first obtain a RGA number within 30 days of discovery of the defect, and return the product to NICOR for inspection. Once verified to be covered by this limited warranty, NICOR will, at its sole discretion, repair, replace, or refund the purchase price of any product that does not conform to this limited warranty. If NICOR, at its sole discretion, determines that the product should be repaired or replaced, this warranty is limited to the reasonable, customary, and necessary costs and expenses associated with the repair/replacement. This warranty requires that all repair/replacement estimates and costs, including but not limited to equipment rental (if any), and any other cost or expense to be incurred in the repair/replacement of the product, be approved in advance and in writing by NICOR. FAILURE TO OBTAIN NICOR'S ADVANCE WRITTEN APPROVAL OF ALL REPAIR/REPLACEMENT COSTS AND EXPENSES IN WRITING SHALL VOID THIS LIMITED WARRANTY.

#### THIS LIMITED WARRANTY DOES NOT COVER THE FOLLOWING:

- Defects or damages resulting from improper installation, operation, storage, misuse or abuse, accident, or neglect;
- Defects or damages resulting from improper service, testing, adjustment, installation, maintenance, alteration, connection to out-of-specification electrical service, corrosive or damp environments, or connection to incompatible equipment or devices (e.g., connecting non-dimmable lighting products to dimmers);
- Damage which occurs in transit;
- Power surges or overheating due to external conditions
- Acts of nature including but not limited to lightning strikes

ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE SHALL BE LIMITED TO THE DURATION OF THIS LIMITED WARRANTY, OTHERWISE THE REPAIR, REPLACEMENT, OR REFUND AS PROVIDED UNDER THIS EXPRESS LIMITED WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER, AND IS PROVIDED IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. IN NO EVENT SHALL NICOR BE LIABLE, WHETHER IN CONTRACT OR IN TORT (INCLUDING NEGLIGENCE) FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF THE PRODUCT, OR FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE ABILITY OR INABILITY TO USE THE PRODUCT TO THE FULL EXTENT THESE DAMAGES MAY BE DISCLAIMED BY LAW

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.