

# ECL2 Slim LED Combo Exit Sign & Emergency Light

The NICOR ECL2 Series presents a very slim design, only 1" deep! This UL924 code compliant solution for exit and emergency requirements offers high output and adjustable LED heads to deliver direct illumination for path of egress. The evenly illuminated exit sign is available with red or green stencils. The ECL2 Series offers flexible installation for surface ceiling or wall mount options along with field removable chevrons for universal configuration based on your application's directional needs. Supplied with two faces for single or double face installation.

## Construction

- Injection molded thermoplastic ABS housing, UL-94-V-0 rated material

## Electrical

- Operating temperature rating of 5°F to 104°F (-15°C to 40°C)
- Maintenance-free nickel-cadmium battery provides 90-minute emergency operation and recharges in 24 hours
- 120/277VAC Dual voltage operation, 60Hz input
- Fully-illuminated 6" letter height with 3/4" stroke
- Includes test switch/power indicator light

## Finish

- White textured thermoplastic housing
- Available with either red or green lettering

## Installation


- Surface ceiling or wall mount installation options
- Snap-in mounting bracket
- Universal mounting plate with EZ quick connect
- Field-installable, removable chevron directional indicators for all configurations
- Supplied with two faces for single or double face installation

## Compliance


- UL 924
- Listed for damp locations

## Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

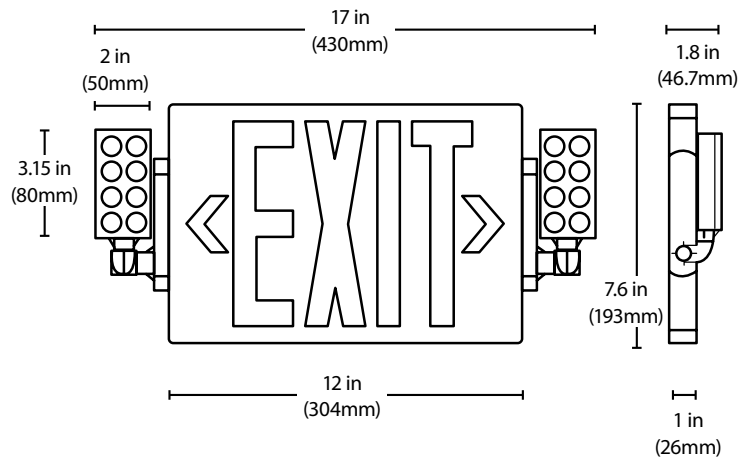

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	3.3W
Emergency Operation	Minimum 90 Minutes



**330° TILT WITH 200° ROTATION**

# Applications



The ECL series can be installed in many applications such as hospitals, event venues, conference spaces, and more.

# Installation



The ECL2 installs with a universal mounting plate with an EZ quick connect for easy ceiling or wall mount installations.

The ECL2 has adjustable lamp heads with the exit sign available in green or red.



Ordering Information					
Series	Version	Voltage	Housing Color	Letter Color	Number of Faces
ECL2	1 (Version 1)	UNV (120/277VAC)	WH (White)	G (Green)	2 (Single and Double)
				R (Red)	