

Silicone Moisture Barrier Underlayment

70-198
70-198-9

For use with wood subfloors only

EASY FLOORING INSTALLATIONS

Silicone-infused paper allows planks to easily slide into place, visible chalk lines for improved positioning

EXCEEDS NWFA RECOMMENDATIONS

Recommended for staple and nail-down installations of solid and engineered wood floors and floating LVT applications

COMPATIBLE


Suitable for use under radiant-heated floors

MOISTURE BARRIER

Reduces vapor flow without trapping moisture

LESS MESS, NO ODOR

No residue on hands / walls, reduced dust / noise and no asphalt odor or toxic chemicals

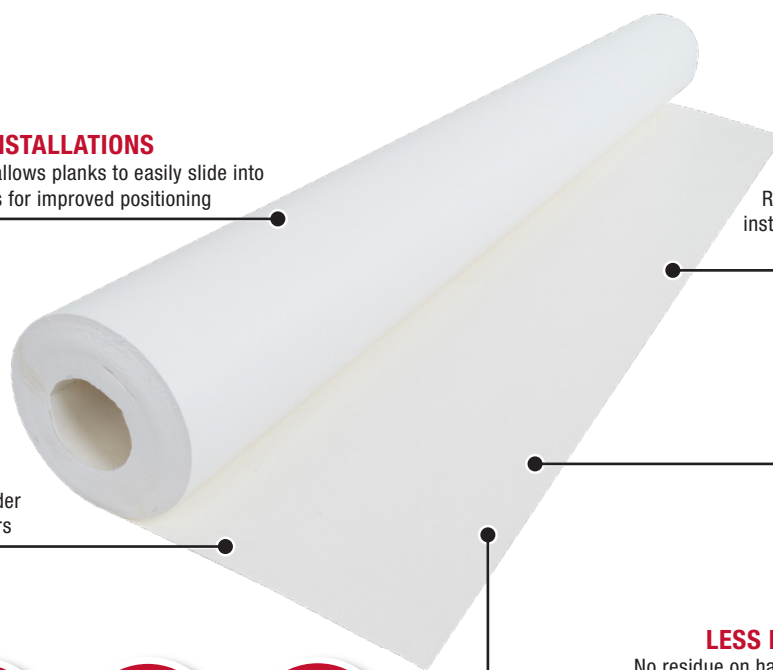

ROBERTS® Silicone Moisture Barrier is an underlayment with a silicone coating that will minimize moisture penetration to the finished flooring planks. The smooth surface side allows installers to easily slide planks during install, allowing for a fast installation.

Made from repurposed paper that is environmentally safe and does not contain any toxic tar or tar-based materials found in some moisture barriers. The environmentally friendly paper will not leave black residue on hands or walls, and allows for a more visible chalk line. In addition, it does not fall apart during installation like red rosin, kraft and wax papers can.

Scan here for
PRODUCT
INFORMATION



SPECIFICATIONS

ITEM #	70-198	70-198-9
UNIT OF MEASURE	1 each	1 case / 9 rolls
COVERAGE	200 sq. ft. / roll	200 sq. ft. / roll
WIDTH OF ROLL	31.5"	33.5"
LENGTH OF ROLL	76.25 ft. (915")	72 ft. (864")
THICKNESS	6 mil (0.006")	6 mil (0.006")

