

ERH-WPSD

Emergency Light Weather Resistant Remote Head Self Diagnostic Compatible

Product Description

The ERHWPSD Series LED Weather Resistant Remote lamps are designed to work with any of NICOR's 3.6VDC self diagnostic LED Exit combos and emergency lighting units with remote capability. With a weather-resistant enclosure, this sleek, contemporary design offers fully adjustable heads that complement any environment. The ERHWP Remote lamps are available in single or double head configurations.

Construction

- Weather resistant injection molded thermoplastic ABS housing with powder coated die-cast aluminum base
- UL-94v-0 Flame rating - Flame Retardant
- Adjustable heads for aiming light where required
 - Head tilt: $\pm 70^\circ$
 - Head rotation: 360°

Optical System

- Precision engineered Prismatic Lens

Electrical

- Input voltage of 3.6VDC
- 1.3 W max per head

Mounting and installation

- Easy installation onto a standard junction box

Finish

- Grey unpainted ABS plastic
- Grey powder coated aluminum base

Warranty



- 1-year limited system warranty standard

Project _____

Catalog _____

Type _____

Date _____

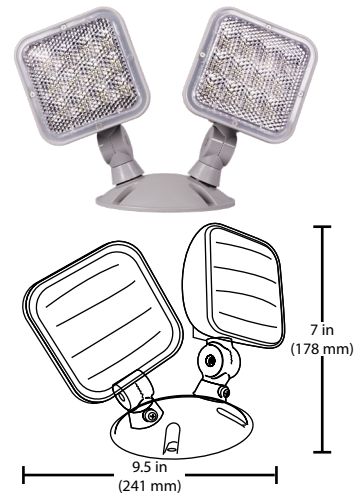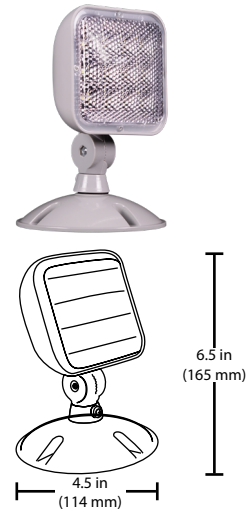

Photometric Data

ERH3WPSD

Input Voltage (VDC)	3.6
System Level Power (W)	1.3
Delivered Lumens (Lm)	128.3
System Efficacy (Lm/W)	98.7
Correlated Color Temp (K)	6293
Color Rendering Index (CRI)	82

ERH4WPSD

Input Voltage (VDC)	3.6
System Level Power (W)	2.6
Delivered Lumens (Lm)	256.6
System Efficacy (Lm/W)	98.7
Correlated Color Temp (K)	6438
Color Rendering Index (CRI)	83

Compatible NICOR Lighting Units*

- ECL3SD with remote option
- EML3SD with remote option

*Not a complete list. Check compatibility before installation.



Ordering Information

Series	Self Diagnostic Compatible
ERH3WP	SD
ERH4WP	

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.