

Lumination® PVR Series

PVR 2x2 & 2x4 series -
ProLine® Volumetric T-Grid



CUSTOMER NAME _____

Project Name _____

Date _____ Type _____

Catalog Number _____

The Lumination® PVR series is an LED ProLine® contractor grade luminaire. A five year design life fixture with three-dimensional volumetric design for those with first cost needs. For total cost of ownership requirements consider our LVR Series. PVR offers even lower installation costs with switchable lumens and CCT, so there is no need to decide the specific product until it is at the job-site. Suitable for indoor general lighting on retrofit solutions.

ProLine®

CONSTRUCTION

Housing: Durable, long lasting post painted steel construction.

Lens: Precision formed optical assembly

Paint: Post painted powder coat finish

Weight: <10 pounds

OPTICAL SYSTEM

Lumens: 2x2 2700/4200/4950 lumens (Field Switchable)

2x4 2700/4200/4950 lumens (Field Switchable)

Wattage: 2x2 19.5/31/37.5 (Field Switchable)

2x4 19.5/31/37.5 (Field Switchable)

Efficacy: 2x2 Up to 138 LPW

2x4 Up to 138 LPW

CCT: 3500K/4000K/5000K (Field Switchable)

CRI: 80+, R9>0

ELECTRICAL

Input Voltage: 120-277V, 347V

Input Frequency: 50/60Hz

Standard Dimming Control: 0-10V, Dimming

Power Factor (PF)*: > 0.9%

Total Harmonic Distortion

(THD)*: <20%

* PF and THD may vary with options

CONTROLS

Dimming: Standard - 0-10V, Dimming

Sensors: Daintree EZ Connect Compatible
(see Ordering for additional info)

AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
OPERATING TEMPERATURE	0°C TO +30° C
STORAGE TEMPERATURE	-40°C TO +70°C

LUMEN MAINTENANCE

LXX(10K) @ Hours
50,000 HR

L70

MOUNTING

- **Typical Mounting:** Fits standard T-Bar grid (drop ceilings) existing fixture back boxes

DESIGN LIFE & WARRANTY

- Insulation Contact: Type IC Rated
- Damp Location rated
- UL/cUL Certified
- RoHS compliant
- ANSI C82.77 Compliant
- Current's Limited 5-year Warranty:
Please refer to document **IND599** for more information.



Lumination® PVR Series

PVR 2x2 & 2x4 series -
ProLine® Volumetric T-Grid

Ordering Information

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

Ordering Information¹ (Important: Please see note 1 below) :

PVR **A** **X** **4X** **MM** **8XX** **RM** **WHITE**

--- -- - -- -- --- -- ---- --

FAMILY	FIXTURE TYPE	GENERATION	VOLTAGE	NOMINAL LUMENS	DISTRIBUTION	CRI/CCT	CONTROLS ²	MOUNTING	FINISH	OPTIONS
PVR = ProLine® Volumetric Retrofit	22 = 2' x 2' 24 = 2' x 4'	A = 1 st Generation	0 = 120-277V D³ = 347V	4X =Nominal Lumen Level (middle is default)	MM = Med. Lambertain Curved Diffuser	8 =80 CRI 3500/4000/5000K Switchable (4000K is default)	VQ = 0-10V Dimming TT² = Daintree EZ Connect (fixture integrated sensor)	RM = Refit Mounting	WHITE = White	(blank) = None EL¹ = Emergency Light

ORDERING NOTES:

1. Test switch is remote mounted in the ceiling, EL option not available in 347V
2. TT option is not available in 347V
3. D option is 3W higher

EXAMPLE CONFIGURATIONS	LUMINAIRE LUMENS (SWITCHABLE ⁴)	LUMINAIRE TOTAL SYSTEM WATTS	LPW
PVR22A04XMM8XXVQRMWHT	2700/4200/4950	19.5/31/37.5	138/135/132
PVR24A04XMM8XXVQRMWHT	2700/4200/4950	19.5/31/37.5	138/135/132

Lumination® PVR Series

PVR 2x2 & 2x4 series -
ProLine® Volumetric T-Grid

Photometric Data

CUSTOMER NAME

Project Name _____


Date _____ Type _____

Catalog Number _____

PVR 2X2/2X4 SERIES

ZONAL LUMEN SUMMARY	
ZONE	LUMENS
0-10°	147.4
10-20°	424.2
20-30°	649.2
30-40°	795.1
40-50°	845.6
50-60°	800.9
60-70°	670.0
70-80°	456.1
80-90°	156.2
90-100°	1.0
100-110°	0.7
110-120°	0.6
120-130°	0.6
130-140°	0.6
140-150°	0.6
150-160°	0.6
160-170°	0.4
170-180°	0.1

ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% OF LAMP	% OF FIXTURE
0-20	572	N.A.	11.5
0-30	1221	N.A.	24.7
0-40	2016	N.A.	40.7
0-60	3662	N.A.	74
0-80	4788	N.A.	96.7
0-90	4945	N.A.	99.9
10-90	4797	N.A.	96.9
20-40	1444	N.A.	29.2
20-50	2290	N.A.	46.3
40-70	2317	N.A.	46.8
60-80	1126	N.A.	22.7
70-80	456	N.A.	9.2
80-90	156	N.A.	3.2
90-110	2	N.A.	0
90-120	2	N.A.	0
90-130	3	N.A.	0.1
90-150	4	N.A.	0.1
90-180	5	N.A.	0.1
110-180	4	N.A.	0.1
0-180	4950	N.A.	100

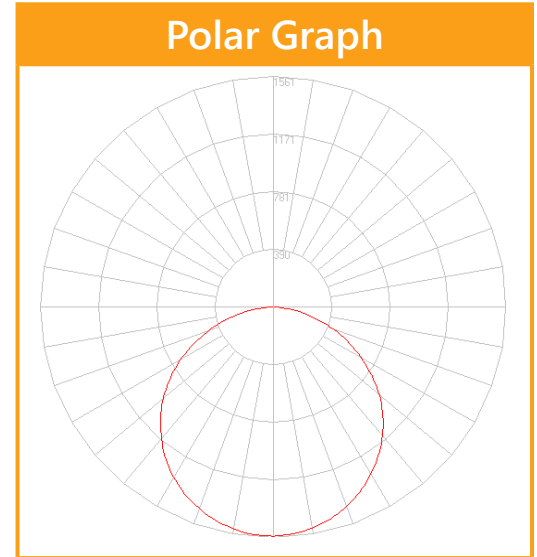

Lumination® PVR Series

PVR 2x2 & 2x4 series -
ProLine® Volumetric T-Grid

Dimensions


CUSTOMER NAME

Project Name _____

Date _____ Type _____


Catalog Number _____

PVR 2X2 SERIES

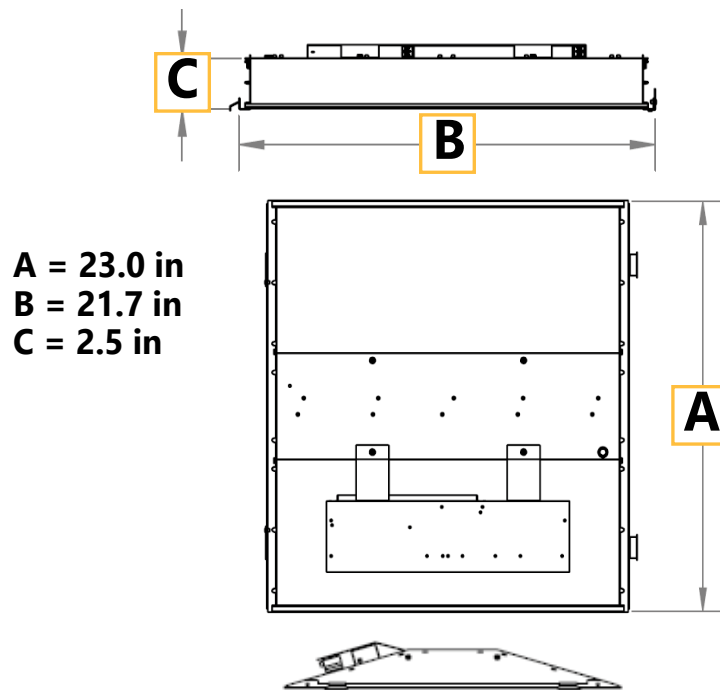

A = 23.0 in
B = 21.7 in
C = 2.5 in

PVR 2X4 SERIES

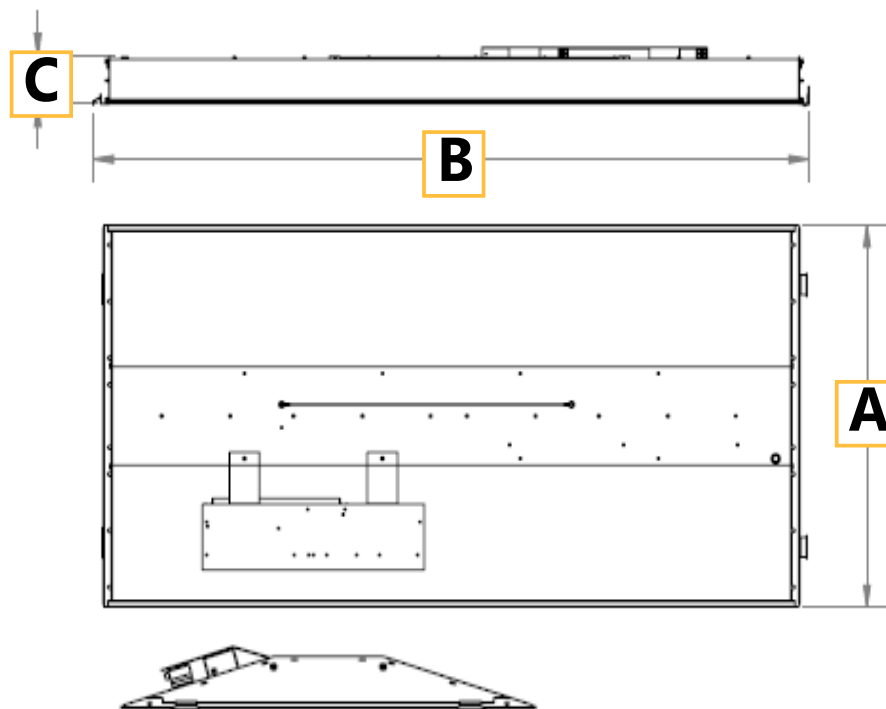

A = 23.0 in
B = 45.6 in
C = 2.5 in

Lumination® PVR Series

PVR 2x2 & 2x4 series -
ProLine® Volumetric T-Grid

Options

AGENT/DISTRIBUTOR NAME-LOGO

Project Name _____

Date _____ Type _____

Catalog Number _____

DAINTREE CONTROLS

Daintree® Wireless Controls:

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree® Wireless platform is it's ability to integrate into indoor, outdoor and high bay environments. The Daintree® Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- **Daintree® One:** Standalone Wireless Controls
- **Daintree® EZ Connect:** Room-Based Wireless Lighting Controls
- **Daintree® Networked:** Networked Lighting Controls for Smart Building & IoT Enablement.

Note: For networked solutions, use the LVT/LVR series products.

Daintree® Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices. Visit our website <https://products.gecurrent.com> for a complete list of LED Fixtures.

ProLine®

Every contractor deserves a
Fast, Reliable, and Trusted Lighting Partner



For Product or Technical Questions:

Email: lightingproinfo@gecurrent.com

Phone: +1 888 694 3533, option 2

GE current
a Daintree company

www.gecurrent.com

© 2021 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
IND609 (Rev 04/21/21)