

1U 19" Rack Mount LCD Console – USB

RKCONM1901US



*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Product Diagram	1
Front View	1
Rear View	1
Introduction	2
Packaging Contents	2
Installation	2
Rack Installation.....	2
Server / KVM Connection	4
Specifications.....	5
Technical Support	6
Warranty Information.....	6


Product Diagram

Front View

Note: Mounting Rails do not come pre-installed on product – shown here for completed product photo only.



Rear View

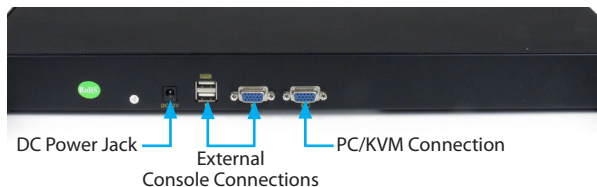

Introduction

Packaging Contents


- 1 x LCD Console
- 1 x Set, Mounting Rails
- 1 x USB VGA KVM Cable
- 2 x KVM Bracket Screws
- 1 x Power Adapter
- 3 x Power Cords (NA/EU/UK)
- 1 x Instruction Manual (CD)

Installation

Rack Installation

Before installing the mounting rails into your rack, the KVM attachment bracket will need to be installed onto each rail.


1. Slide the rear portion of the Mounting Rail outward and separate from the front portion. Slide on the KVM Attachment Bracket (note proper orientation in photo) before re-inserting. Repeat for the other rail.

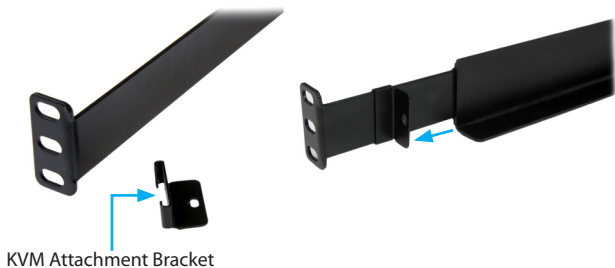

- Place the first Mounting Rail at the desired location of your rack with the support flange facing inward at the bottom of the rail, and fasten the bottom 2 mounting holes of the Front Mounting Ear to the rack using screws / cage nuts appropriate for your rack (not included).




- Slide the rear portion of the Mounting Rail until the Rear Mounting Ear makes contact with the rack, and then fasten it to the rack. Repeat steps 2-3 on the opposite side of the rack, ensuring that the two Mounting Rails are installed evenly.
- Slide the LCD Console unit onto the support flanges, and attach the front of the console to the front of the rack.
- Slide the KVM attachment brackets installed in Step 1 along the rail until they contact the rear of the KVM module, then use the included screws to attach the brackets to the rear of the switch on both sides.



- Once mounted securely, pull the handle at the front of the console lid to unlock and allow the rails to slide outward before opening the lid.

Note: The lid can be opened up to a maximum of 120°

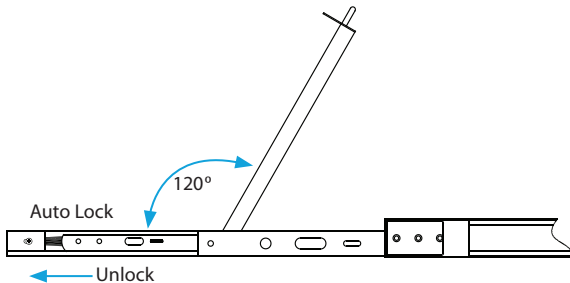

Server / KVM Connection

The KVM control platform supports hot-plugging. It can be connected and disconnected without powering off the console if necessary.

Note: If the KVM doesn't respond when connected without powering off, press the Reset button on the console to re-initialize the connection

- Using the included KVM cable, connect the VGA-only end to the rack console PC Connecting port.
- Connect the USB and VGA end of the cable into their respective ports on the server / KVM switch you wish to monitor.
- Plug the power adapter cable into the power jack, and then plug the power adapter into an AC power source.

Specifications

Console Connectors	1 x VGA (15 pin; High Density D-Sub) Female 2 x USB A (4 pin) Female
Host Connector	1 x VGA (15 pin; High Density D-Sub) Female
LEDs	1 x Power
Maximum Resolution	1280 x 1024
Response Time	8ms
Contrast Ratio	1300:1
Brightness	300 cd/m ²
Color Depth	8-bit, 16.7M colors
Pixel Pitch Support	0.294 x 0.294 mm
Viewing Angle	178° (H), 178° (V)
Audio Support	No
On Screen Display	No
Cascadable	Yes
Rack-Mountable	Yes
Enclosure Type	Steel
Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-20°C to 60°C (4°F to 140°F)
Humidity	0~80% RH Non-Condensing
Min Mounting Depth	406 mm
Max Mounting Depth	838 mm
Dimensions (LxWxH)	637 x 490 x 44 mm
Weight	13.9 kg

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.