




DA8800WH

8-Port PoE⁺ Switch

Support 8 10/100/1000BASE-T RJ45 ports

Support IEEE802.3at, IEEE802.3af

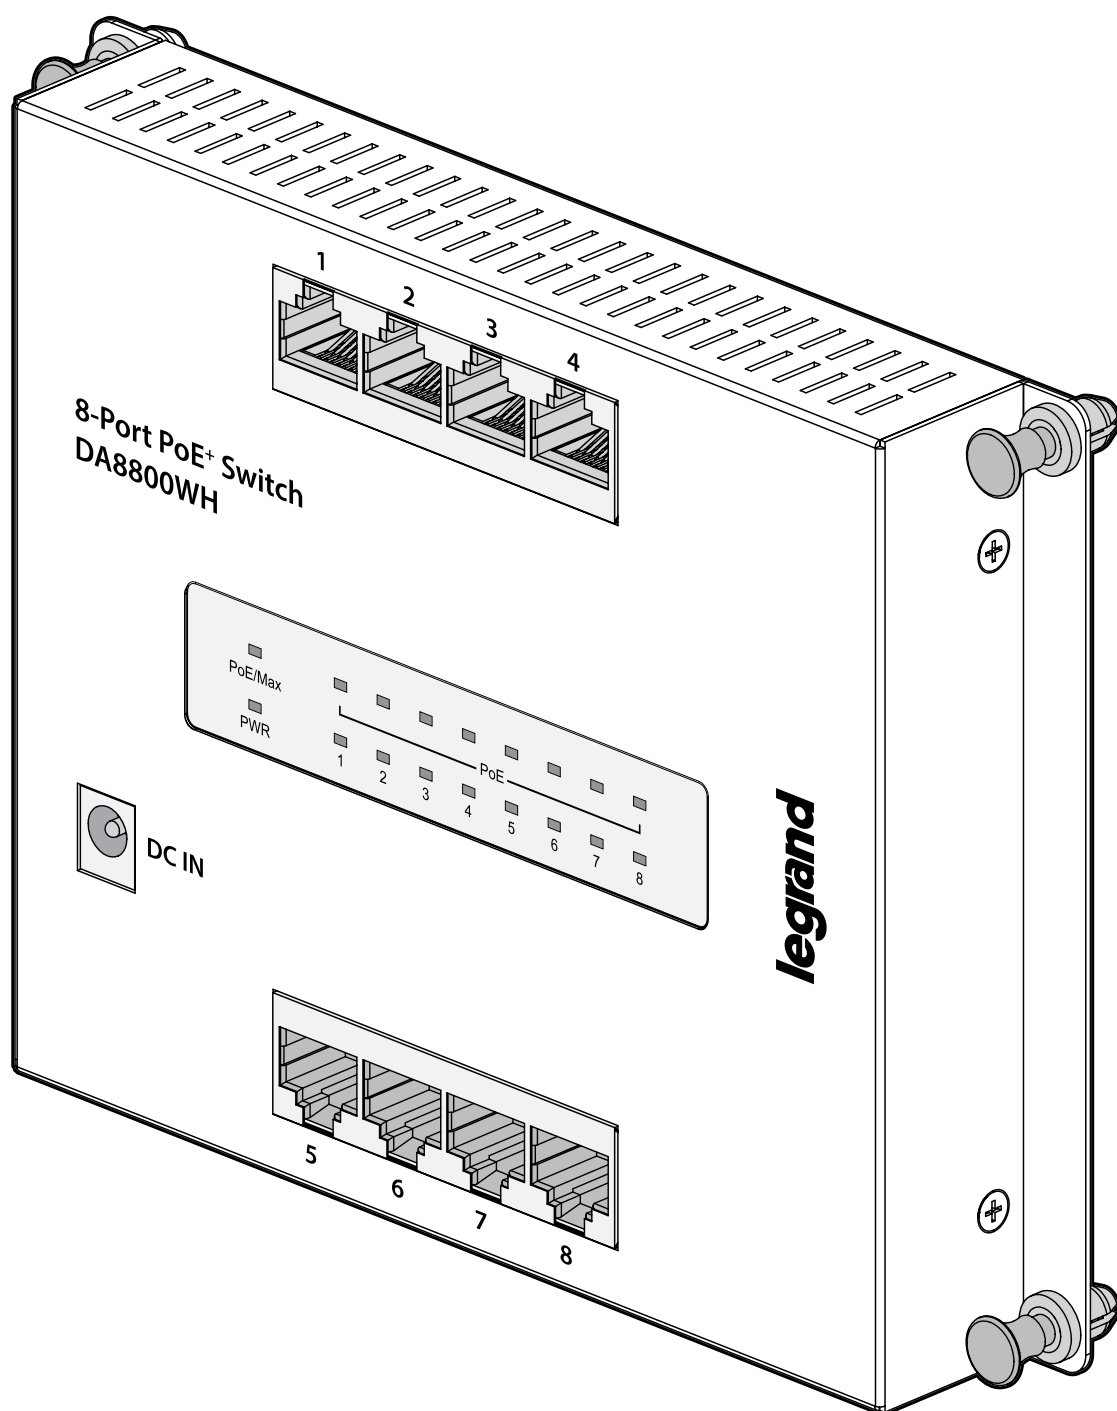

United States:


Legrand AV, Inc.
10900 Red Circle Drive
Minnetonka, MN 55343
1-866-977-3901

Canada:

Legrand, Inc.
9024 Keele Street,
Vaughn, Ontario L4K 2N2
1-800-723-5175


www.legrandav.com

PARTS INCLUDED




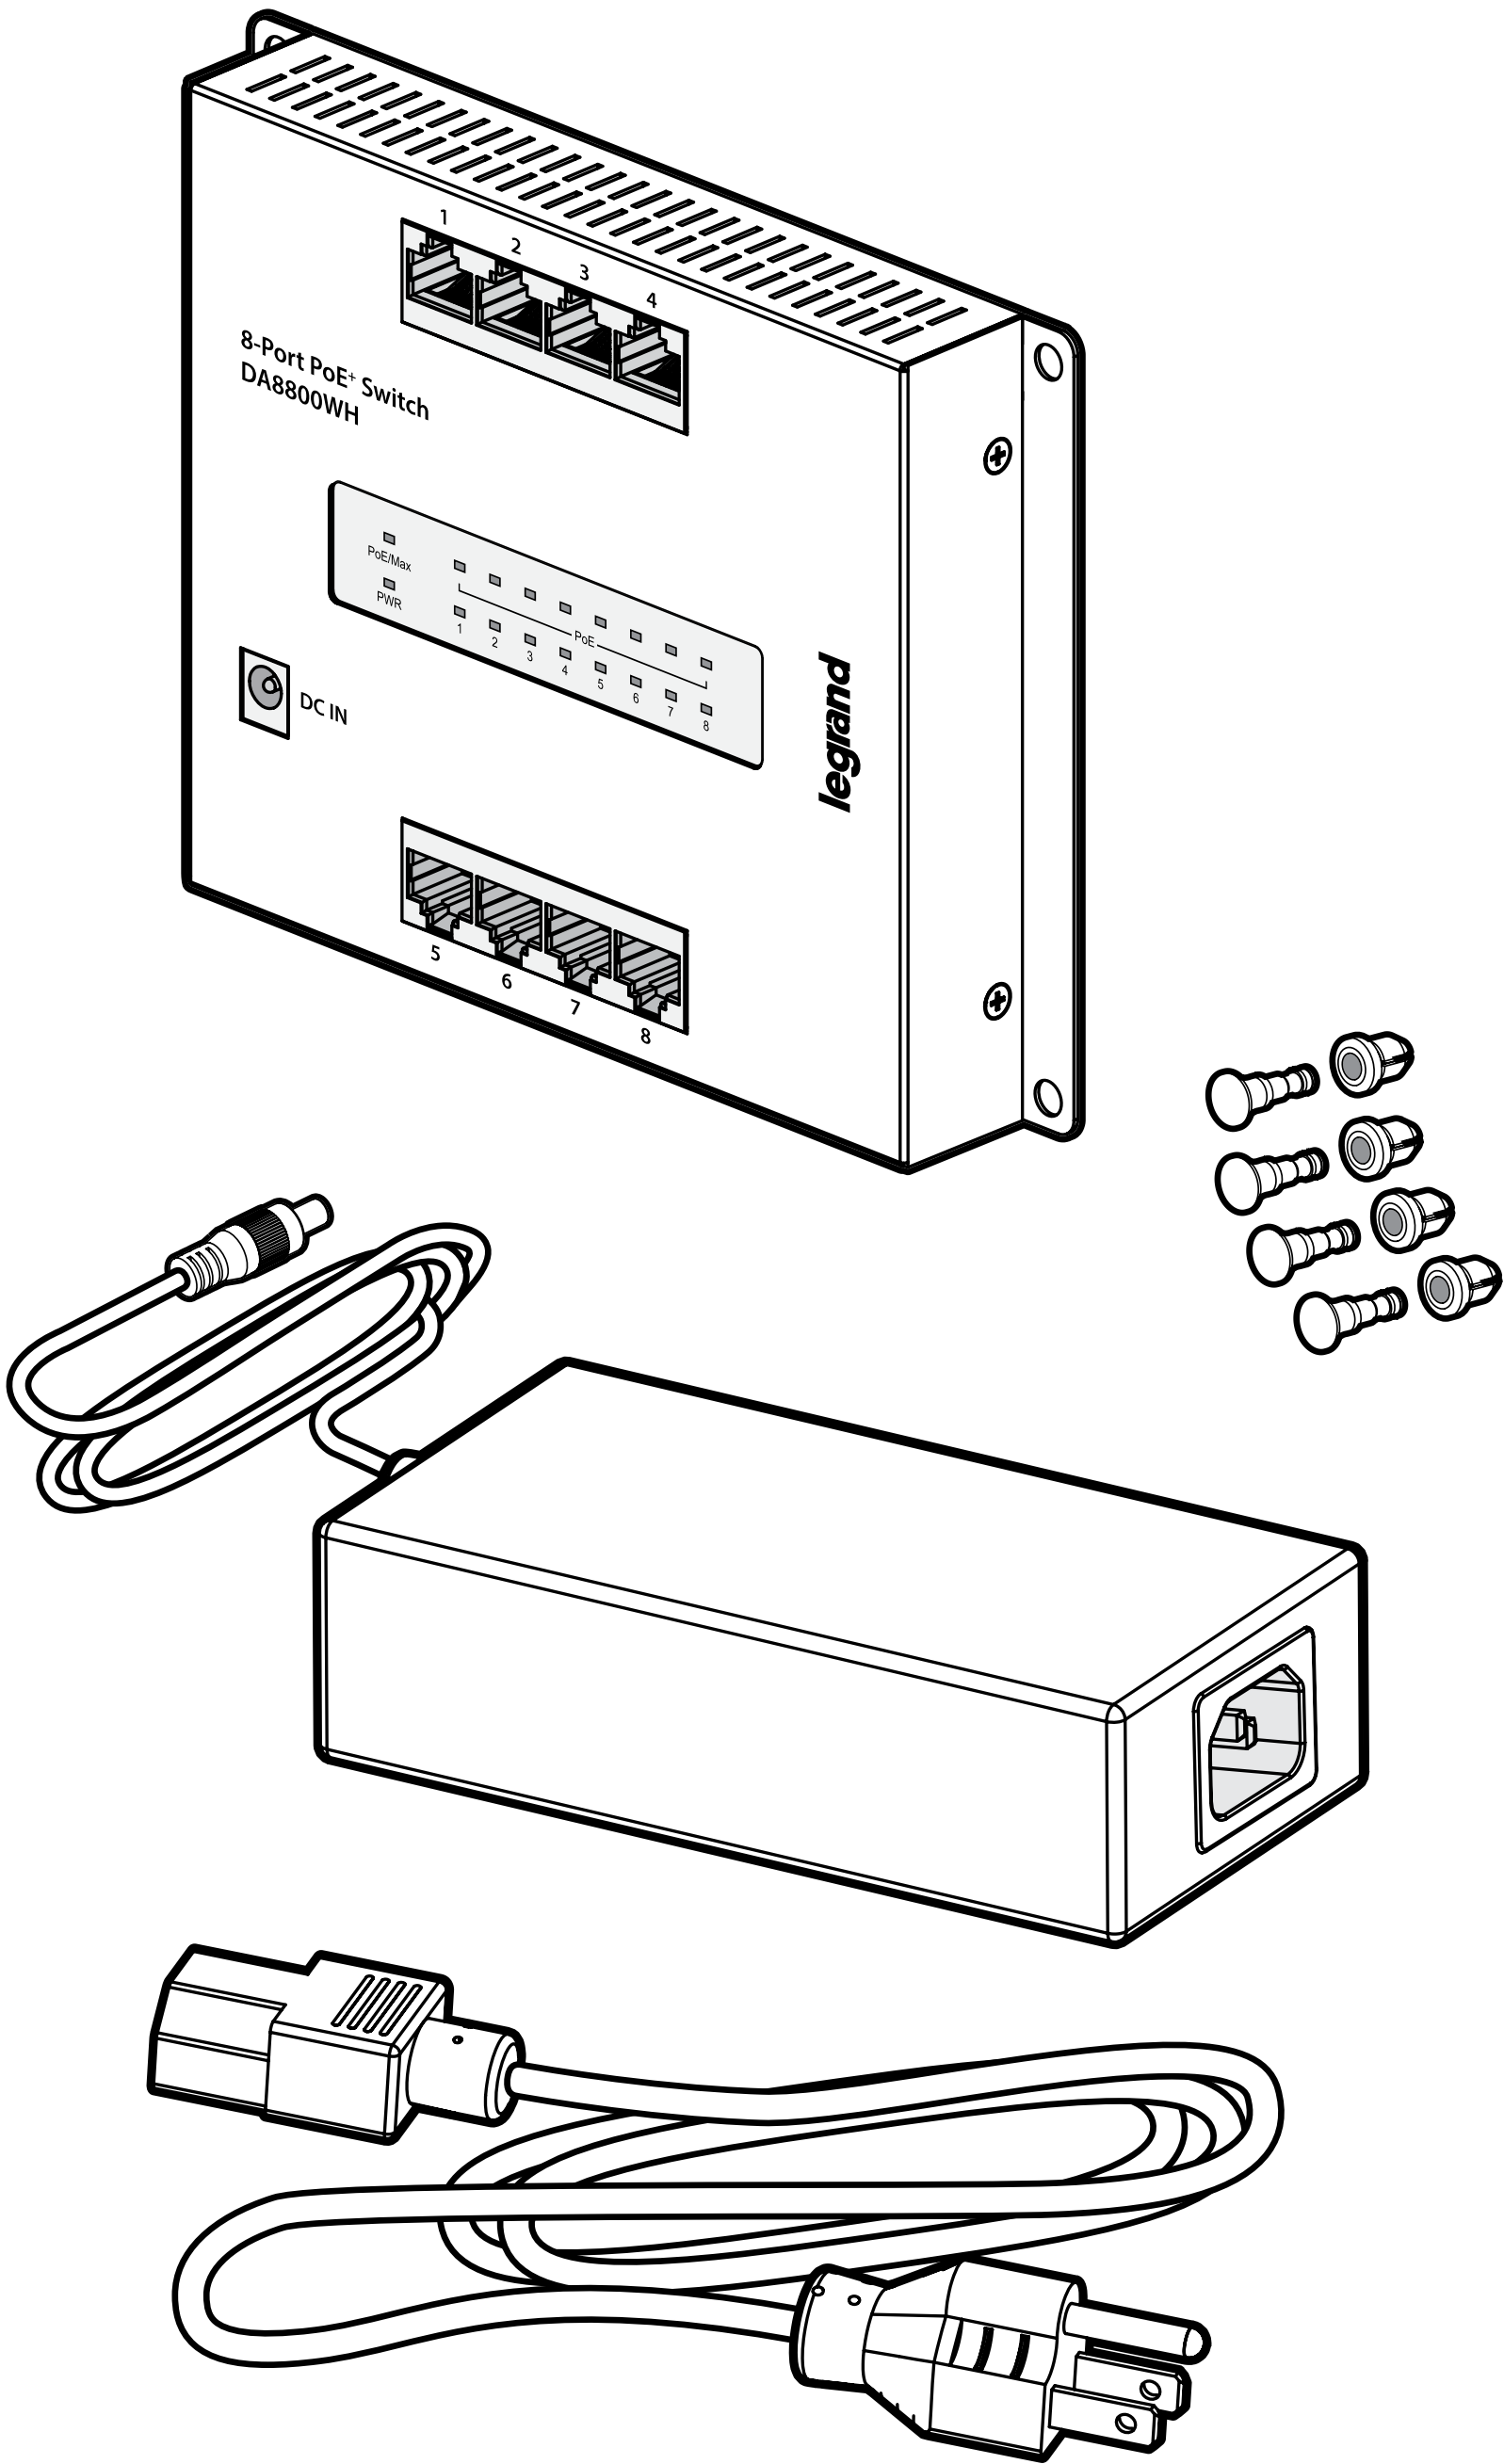


LED INDICATORS


LED	COLOR	FUNCTION
POWER	Off	Power off
	Green	Power on
PoE ⁺ MAX	Off	Within PoE ⁺ power Alert budget
	Green	Over PoE ⁺ power Alert budget
PoE ⁺	Off	PoE ⁺ power output off
	Green	PoE ⁺ power output on
LAN PORT	Off	Port disconnected or link fail
	Green	1000Mbps connected
	Amber	10/100Mbps connected
	Blinking	Sending or receiving data

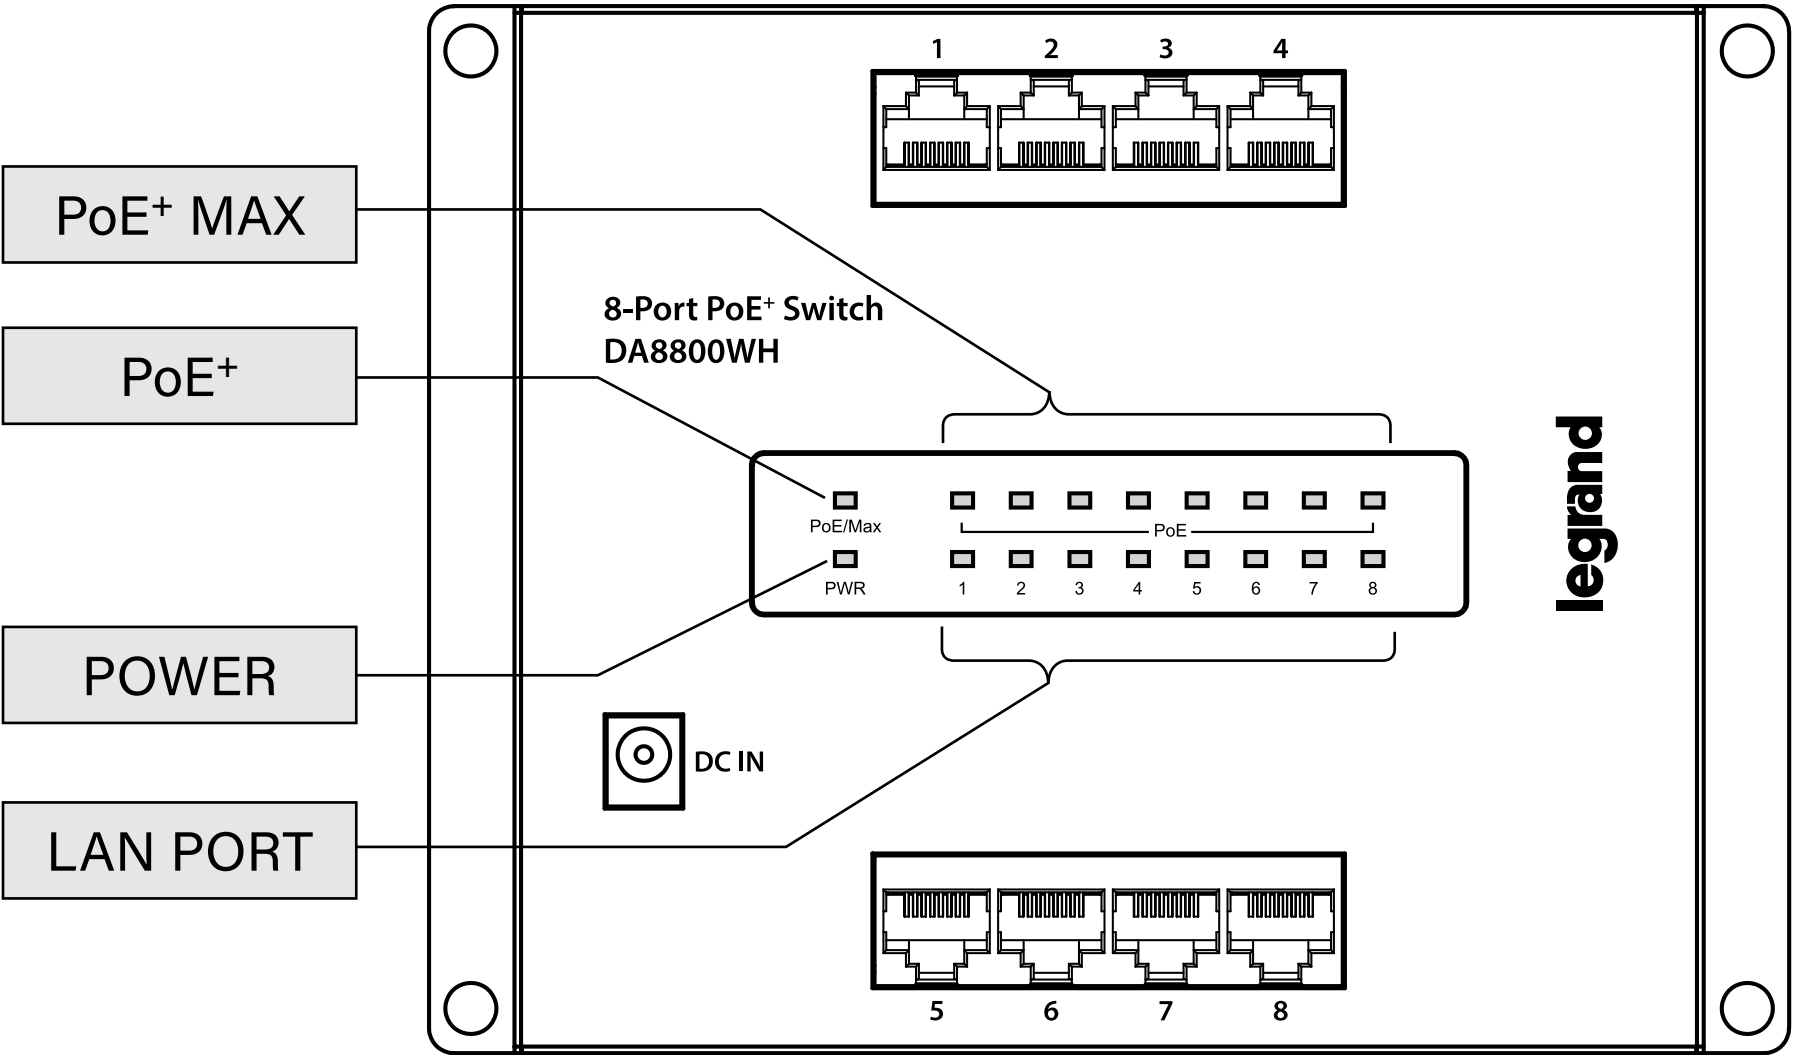

INSTALLATION

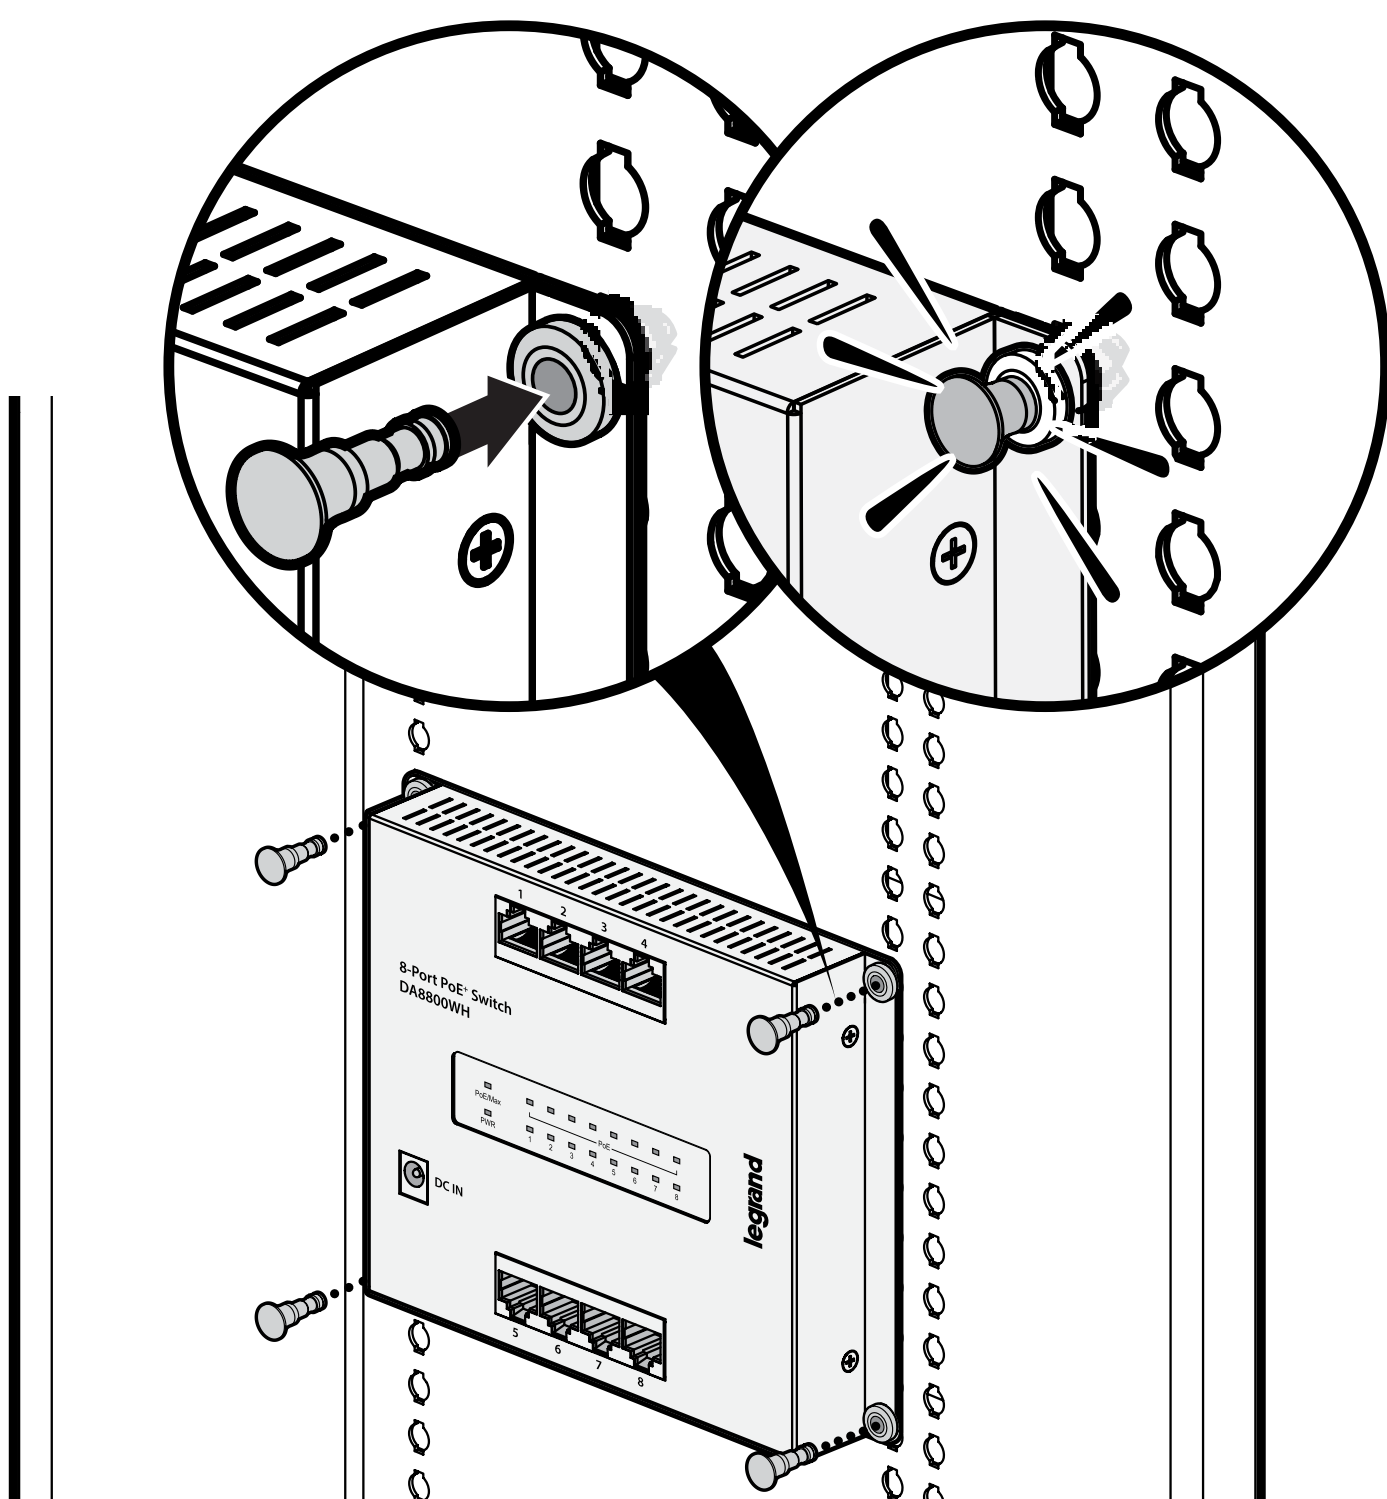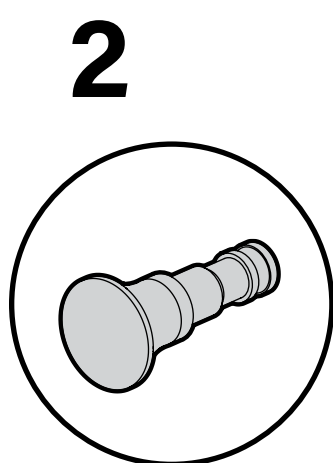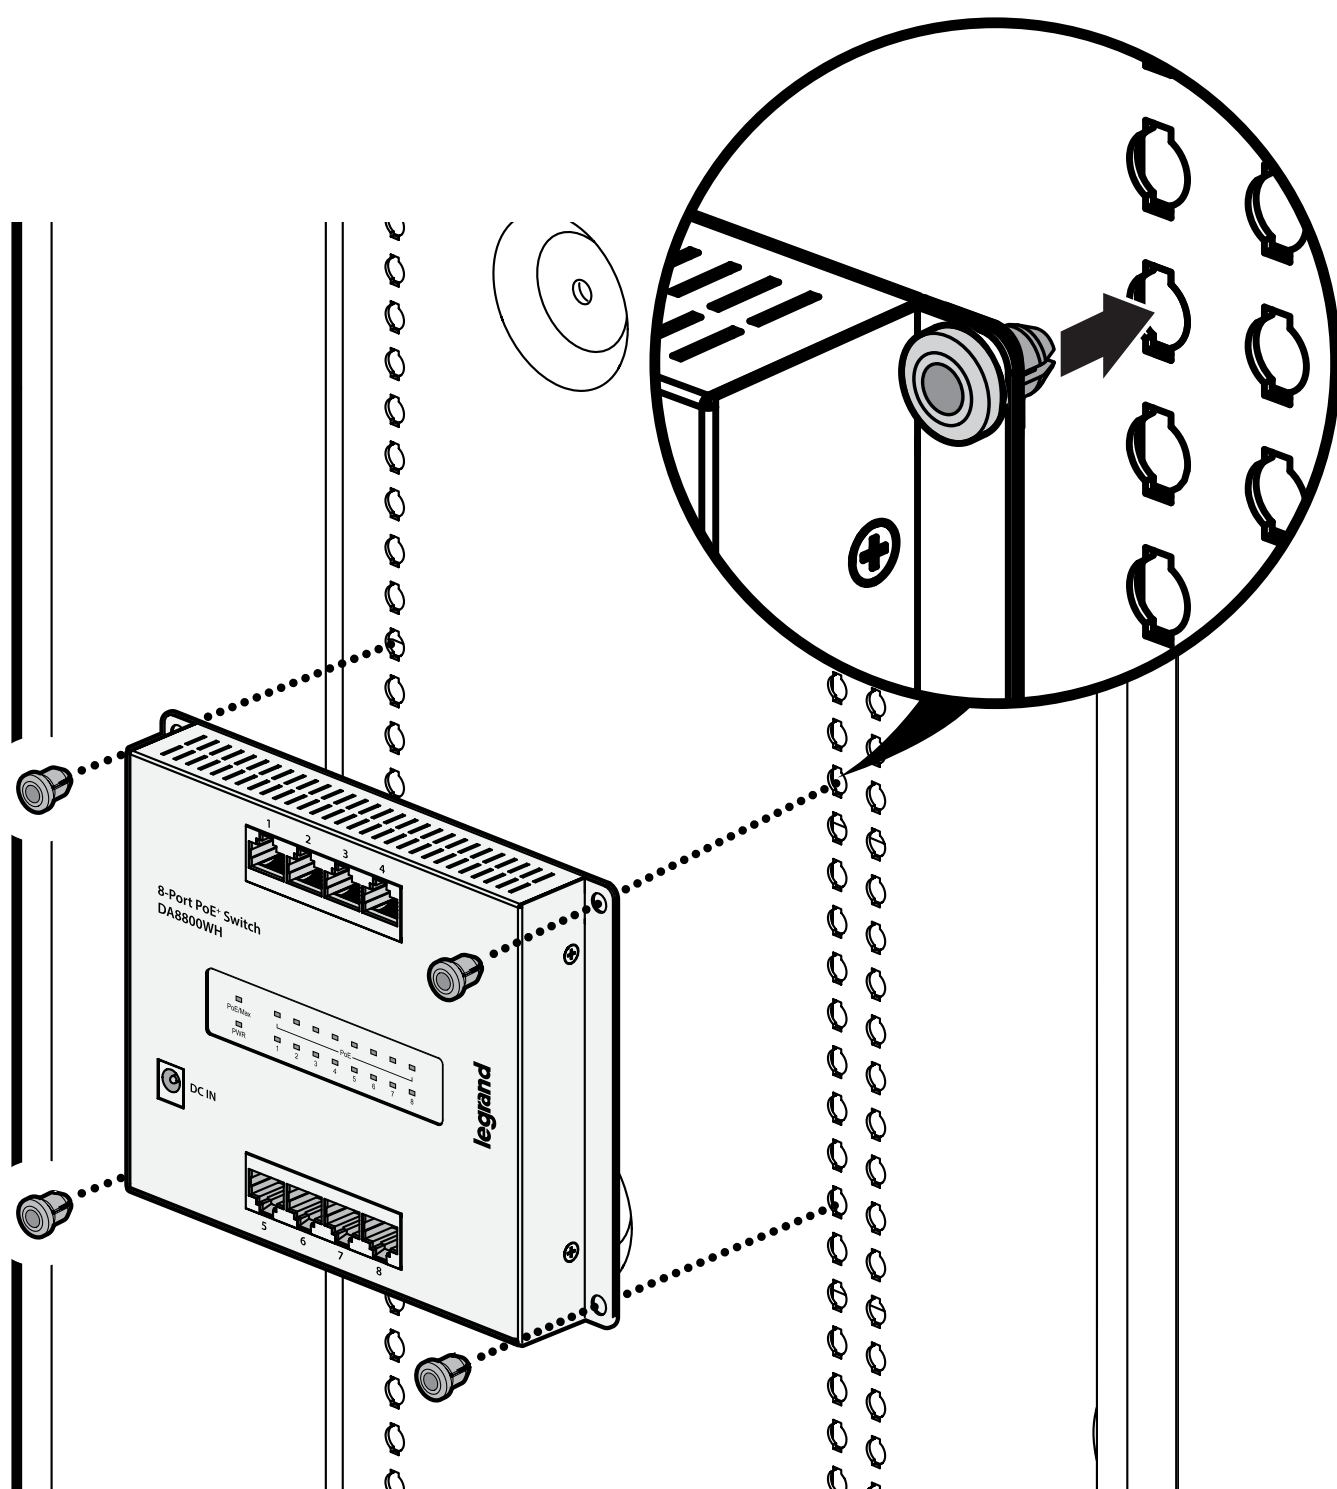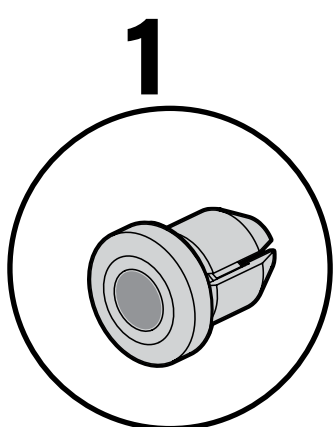


3

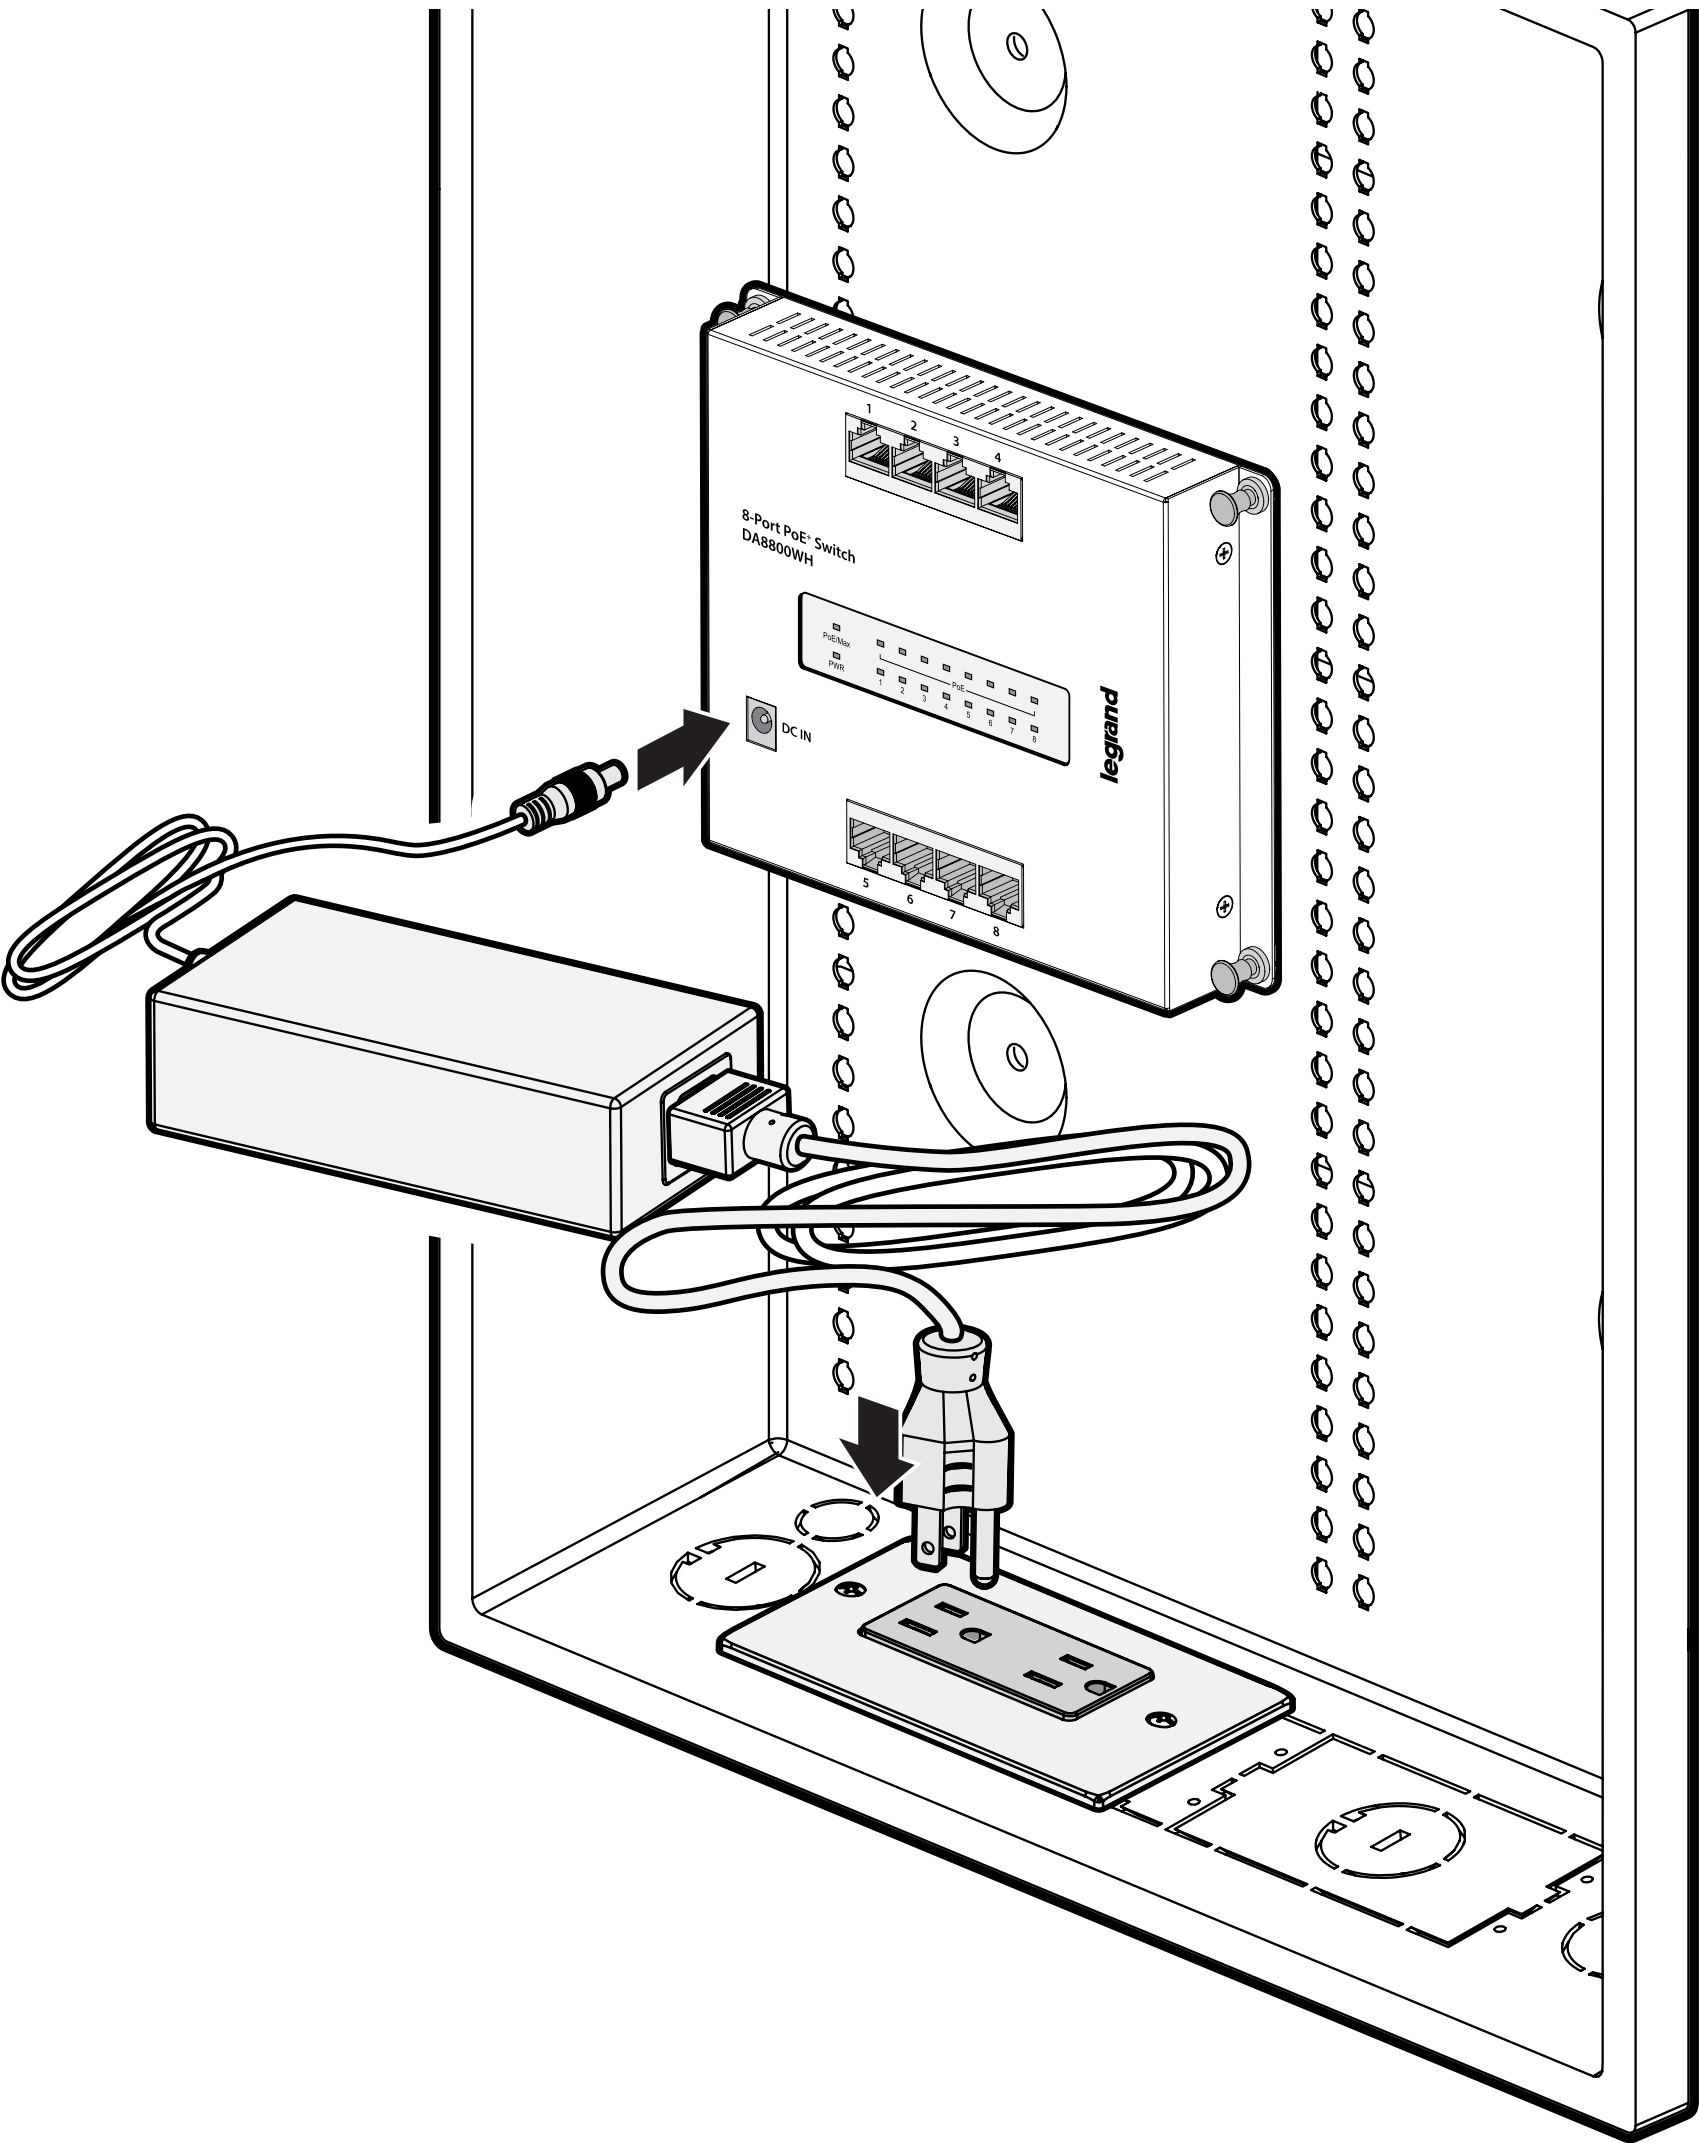

4

Connect your devices with TIA568A recommended cables (Cat5e/Cat6/Cat6a)

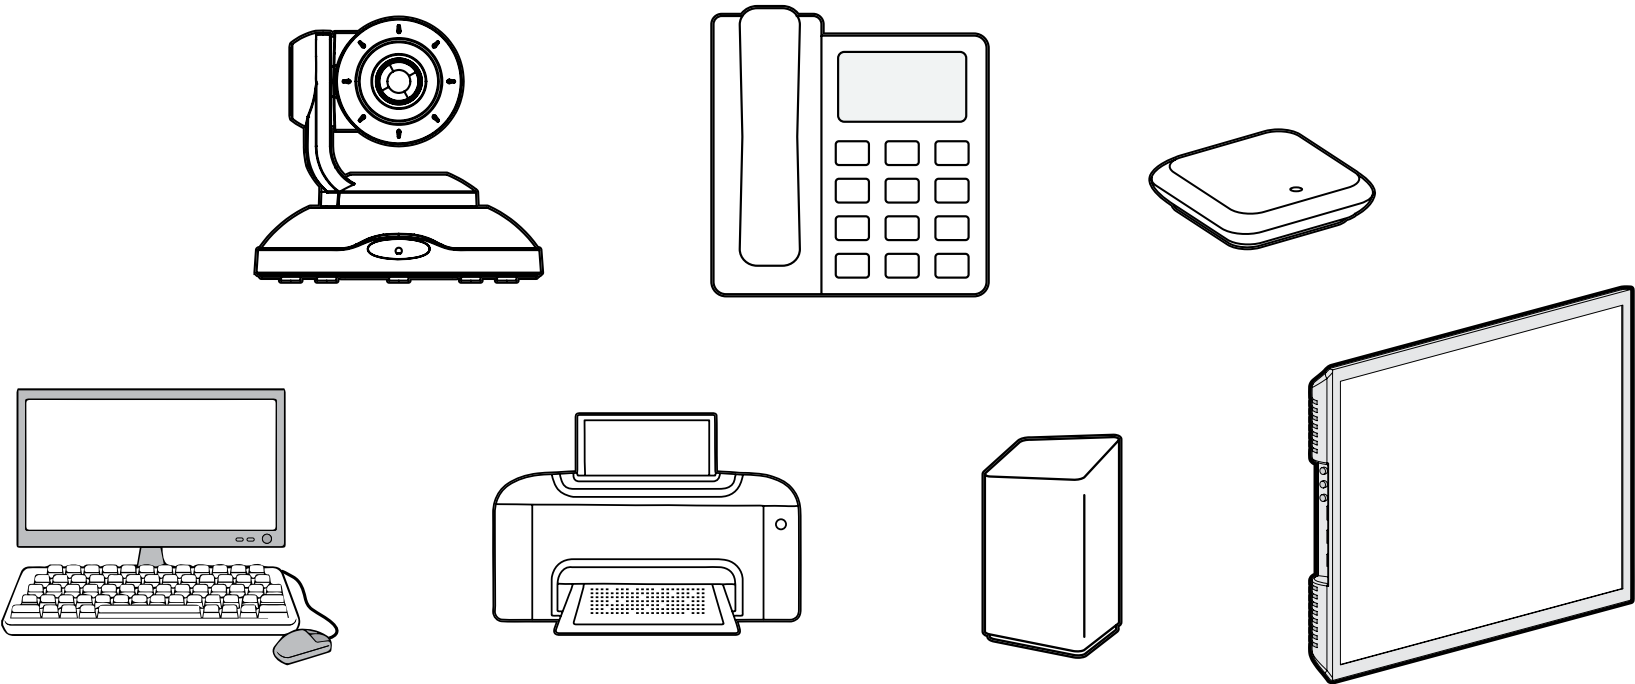

SYSTEM SPECIFICATIONS

Model No.	DA8800WH
Key Components	RTL8370N-VB-CG IC+ IP808AR
I/O ports	8 x Gigabit Ethernet Ports with 8 port PoE ⁺
HW feature	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3ab 1000BASE-T IEEE802.3az EEE IEEE802.3at, IEEE 802.3af MAC address Table: 4K Packet buffer size: 192Kbytes Jumbo Frame: 9216bytes
SW feature	Support HALF/FULL-Duplex operation IEEE802.3x Flow control & Back pressure Auto negotiation Auto MDI/MDIX Non-Blocking Store and Forward VLAN PASSTHRU Reserve Multicast Address:

PoE+ Output power capacity	Maximum output :30W per each port 1. Compliant with IEEE802.3af/at standard, Following IEEE802.3at/at to support PoE or PoE+ 2. Automatically discover the connection of PD device and immediately sends power to it 3. Auto disable port if the port current is over 700mA or short happens 4. Priority default setting is lower port NO. has high priority 5. The maximum power used by power devices is defined by the following classification. When Port works in Auto Mode, the output port power limit will be associated with PD classification Value. <table><tr><th>Class</th><th>Usage</th><th>Minimum Power Levels Output at the PSE</th><th>Maximum Power Levels at the Powered Device</th></tr><tr><td>0</td><td>Default</td><td>15.4W</td><td>0.44 to 12.95w</td></tr><tr><td>1</td><td>Optional</td><td>4.0W</td><td>0.44 to 3.84W</td></tr><tr><td>2</td><td>Optional</td><td>7.0W</td><td>3.84 to 6.49W</td></tr><tr><td>3</td><td>Optional</td><td>15.4W</td><td>6.49W to 12.95W</td></tr><tr><td>4</td><td>Optional</td><td>30W</td><td>12.95W to 25.5W</td></tr></table> 6. Follow the standard PSE pin-out standard of Alternative A (MAD-X) which is sending out power over number 1,2,3,6 pins of 8 wires of Ethernet CAT5 UTP cable	Class	Usage	Minimum Power Levels Output at the PSE	Maximum Power Levels at the Powered Device	0	Default	15.4W	0.44 to 12.95w	1	Optional	4.0W	0.44 to 3.84W	2	Optional	7.0W	3.84 to 6.49W	3	Optional	15.4W	6.49W to 12.95W	4	Optional	30W	12.95W to 25.5W
Class	Usage	Minimum Power Levels Output at the PSE	Maximum Power Levels at the Powered Device																						
0	Default	15.4W	0.44 to 12.95w																						
1	Optional	4.0W	0.44 to 3.84W																						
2	Optional	7.0W	3.84 to 6.49W																						
3	Optional	15.4W	6.49W to 12.95W																						
4	Optional	30W	12.95W to 25.5W																						
PoE+ Power budget	Alert: 100W Budget: 110W (across 8 PoE+)																								
Power Input	AC-to-DC power adapter Input: 90-264 Vac Output: 55VDC/2.18A																								
Dimension	W=142 mm D=125 mm H=25 mm																								
FAN Design	Fanless																								
Temperature	Operating: -10 ~ 40°C Storage : -40 ~ 70°C																								
Humidity	Operating: 5% ~ 95% RH (non-condensing) Storage: 5% ~ 95% RH (non-condensing)																								
Safety	LVD EN62368-1:2020																								
EMC	FCC Part 15, Subpart B: ANSI C63.4-2014 class A CE EN 55032: 2015 + AC :2016 EN55035: 2017																								

 **CAUTION!**

Avoid potential personal injuries and property damage!

- ▶ To Reduce the Risk of Electric Shock - Use Only in Dry Locations, Indoors!
- ▶ To reduce the risk of fire or electric shock, do not use this device with a receptacle in which the slot openings do not align with the blades.
- ▶ All accessories must be grounded.
- ▶ Do not use this product for any purpose not explicitly specified by manufacturer.
- ▶ If you do not understand these instructions, or have doubts about the safety of the installation, assembly or use of this product, contact Customer Service or call a qualified contractor.
- ▶ Manufacturer is not responsible for damage or injury caused by incorrect assembly or use.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-003 (B)/NMB-003(B)

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

Responsible Party: Legrand AV Inc., 10900 Red Circle Drive, Minnetonka, MN 55343
US: 1-866-977-3901 | CANADA: 1-800-723-5175 | www.legrandav.com