



4-Port USB Keyboard and Mouse Switch with Mouse Roaming

Product Diagram P4A20132-KM-SWITCH

Front View

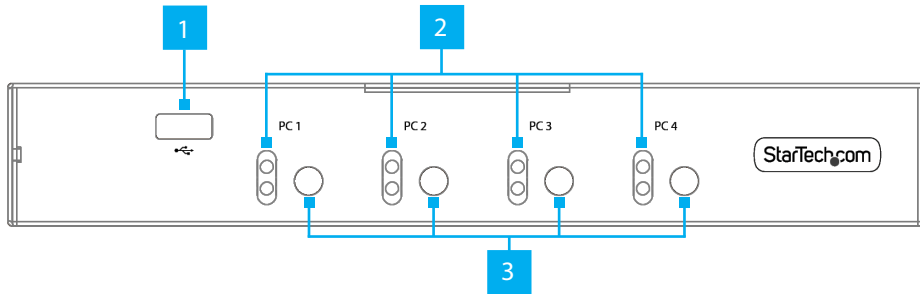

Rear View

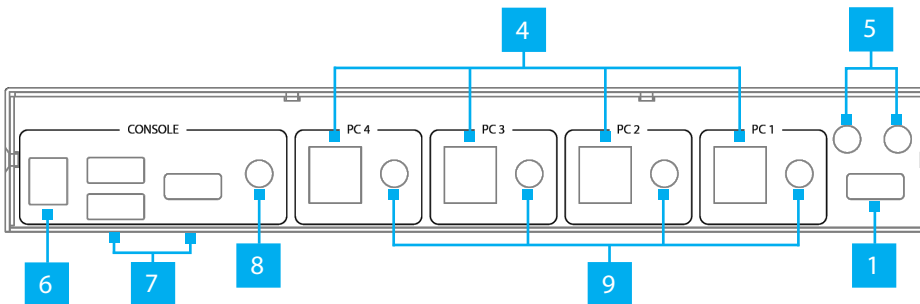

Port	Function
1	<ul style="list-style-type: none"> Connect up to two SuperSpeed USB 5Gbps Devices Front (x1) and Rear (x1)
2	<ul style="list-style-type: none"> Solid Blue: Connected PC is powered on Solid Red: Indicates the selected PC
3	<ul style="list-style-type: none"> Press and release to select PC 1 - 4
4	<ul style="list-style-type: none"> Connect to a Computer with a USB 5Gbps Port

5	USB Audio Ports	<ul style="list-style-type: none"> Green: Connect an Audio Device (e.g. Speakers or Headphones) Pink: Connect a Microphone <ul style="list-style-type: none"> Does not require PC Audio Ports to be connected from PCs 1 - 4
6	DC Power Input Port	<ul style="list-style-type: none"> Connect the included Power Adapter to power the KM Switch
7	USB HID Ports	<ul style="list-style-type: none"> Connect a USB Human Interface Device (HID) (e.g. Keyboard, Mouse, Trackpad, Number Keypad, or Drawing Tablet) Hotkey Commands will only work if the Keyboard is connected to one of the USB HID Ports
8	Console Audio Port	<ul style="list-style-type: none"> Connect an Audio Device (e.g., Headphones) <ul style="list-style-type: none"> Provides pass-through and switching of PC Audio Ports 1 - 4
9	PC Audio Ports	<ul style="list-style-type: none"> Connect to an Audio Output from PCs 1 - 4

Product Information

For the latest requirements and to view detailed instructions on all product functionality in a full user manual, please visit: www.StarTech.com/P4A20132-KM-SWITCH

Requirements

Source PCs

- Computers x 4
- SuperSpeed USB 5Gbps Type-B Cables x 4
- (Optional) 3.5mm 3-Position TRS Audio Cables (Male to Male) x 4

Console

- USB Mouse x 1
- USB Keyboard x 1
- (Optional) Audio Device (e.g. Headphones) x 1
- (Optional) SuperSpeed USB 5Gbps Peripheral Devices x 2

Package Contents

- KM Switch x 1
- Universal Power Adapter (NA/EU/UK/ANZ)x 1
- Quick-Start Guide x 1
- Set of Rubber Feet x 1

Installation

Connect the Console

Note: Power off all **Computers, Displays, and Peripherals** before completing the following installation steps.

1. Connect a **USB Mouse** and a **USB Keyboard** to the **Console USB HID Ports**, located on the rear of the **KM Switch**.
2. (Optional) After connecting the **USB Mouse/Keyboard**, there is one remaining **Console USB HID Port**, located on the rear of the **KM Switch**, for connecting an additional **USB HID Device**.
3. (Optional) Connect an **Audio Device** to the **Console Audio Port**, located on the rear of the **KM Switch**.
4. (Optional) Connect **Headphones** and/or a **Microphone** to the **USB Audio Ports**, located on the rear of the **KM Switch**.

Note: The **USB Audio Ports** will only work if the host has selected the **USB Audio/USB Microphone** as its default input/output devices.

5. (Optional) Connect up to two **SuperSpeed USB 5Gbps Devices** to the **USB 5Gbps Hub Ports**, located on the front and rear of the **KM Switch**.

Regulatory Compliance

FC FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the device. If shielded interface cables are included with the product, or if additional components or accessories are designated for use with the installation, they must be used to ensure compliance with FCC regulations.

ISED Statement / Déclaration d'ISDE

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

CAN ICES-003(A) / NMB-003(A)

This device complies with ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISDE Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Connect the PCs

1. Connect a **SuperSpeed USB 5Gbps Type-B Cable** (sold separately) to a **USB Port**, located on **PC 1**, and to the **PC 1 USB Host Connection**, located on the rear of the **KM Switch**.

Note: A **SuperSpeed USB 5Gbps Cable** (or better) is recommended for optimal performance.

2. (Optional) Connect a **3.5 mm Audio Cable** (sold separately) to the **Audio Port**, located on **PC1**, and to the corresponding **PC1 Audio Port**, located on the rear of the **KM Switch**.
3. Repeat **Steps 1 and 2** for **PCs 2 - 4**.

Operation

Power-On Sequence

1. Connect the **Universal Power Adapter** from a **Wall Outlet** to the **DC Power Input Port** on the **KM Switch**.
2. Power on all **Peripheral Devices**.
3. Select **PC1** by pressing and releasing the **Port Selection Button** and power on the corresponding **Computer**.

Note: Ensure that the **Computer** connected to the **PC 1 Port** has fully booted into the operating system before proceeding.

4. Repeat **Step 3** to connect **PCs 2 - 4**.

Hotkey Commands and Mouse Roaming

For a list of hotkey commands and more information on mouse roaming, please visit: www.StarTech.com/P4A20132-KM-SWITCH

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Safety Measures

If product has an exposed circuit board, do not touch the product under power.

Mesures de sécurité

Si l'un des circuits imprimés du produit est visible, ne pas touchez le produit lorsqu'il est sous tension.

安全対策

製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

Misure di sicurezza

Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

Säkerhetsåtgärder

Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.



StarTech.com Ltd.
45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp