

3 and 5 Port PCI High Speed USB 2.0 Adapter Card

PCI220USBLP

PCI420USB



*actual product may vary from photos

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com

IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

For the most up-to-date information, please visit: www.startech.com

Table of Contents

Introduction	1
Features	1
Package Contents	1
System Requirements.....	1
Installation	2
Installing the Drivers.....	2
Specifications.....	4
Technical Support	5
Warranty Information.....	5

Introduction

Thank you for purchasing a StarTech.com USB 2.0 PCI card. This PCI expansion card will enable you to add highspeed USB 2.0 ports to your computer, and provide data transfer speeds up to 480 Mbps. Now, you can easily connect and use high-performance USB peripherals like DVD drives, video conferencing cameras, or high resolution scanners. Plus, USB 2.0 is also backwards-compatible with USB 1.0/1.1, meaning your existing peripherals will still function perfectly with no additional configuration required.

Features

- Maximum data transfer rate of 480Mbps and backward compatible with USB 1.1 12Mbps
- Compliant with USB Specification Revision 2.0
- Compliant with OHCI Specification for USB Rev 1.0a
- Compliant with PCI Specification release 2.2
- Supports Windows 2000 / XP
- Supports Linux 3.5.x to 4.11.x LTS versions only


Package Contents

- USB PCI Card (PCI420USB)
- Low Profile PCI USB Card (PCI220USBLP)
- Instruction Manual

System Requirements

- Minimum operating system requirement: Windows 2000, XP, or Linux 3.5.x to 4.11.x LTS versions only
- Pentium class computer with an available PCI slot

Installation

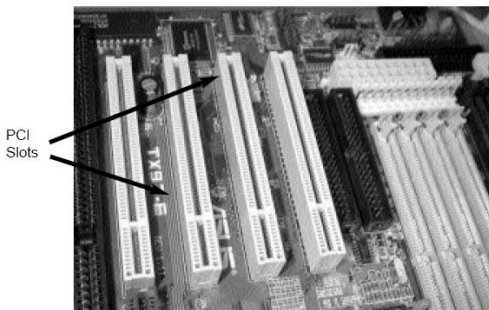

1. Make sure that your system is unplugged and you are grounded.
2. Remove the cover of your system (see your computer's user manual for details, if necessary) and gently turn your computer onto its side, so that the PCI expansion slot openings on the motherboard are facing upwards.
3. Locate an empty PCI slot (usually white in color) and remove the metal plate that covers the corresponding rear bracket. You may need a Phillips screwdriver to perform this step. Retain the screw! You will need it to secure the card later.
4. Gently insert the card into the empty slot, making sure it is firmly seated.
5. Secure the card in place using the screw you removed in Step 3.
6. Replace and secure the computer cover.

Windows 2000 and XP

Please note: Microsoft Windows 2000 and XP natively support the USB interface. As such, Windows will be able to locate and install the necessary files, providing that your operating system is updated with the most current software revisions.

If Windows appears to have difficulty in automatically choosing the necessary drivers, the following updates will be required, prior to using the card:

Windows XP - Service Pack 1 (SP1)

Windows 2000 - Service Pack 4 (SP4) or above

For more detailed information on how to attain the necessary updates, please consult any documentation that was included with your operating system purchase.

Specifications

Bus Type	PCI 5V
Connectors	PCI220USBLP: 2 External USB Type A Female 1 Internal USB Type A Female PCI420USB: 4 External USB Type A Female 1 Internal USB Type A Female
Maximum Data Transfer Rate	480 Mbps
Chipset	VIA VT6212L
OS Support	Windows 2000/XP Linux 3.5.x to 4.11.x LTS versions only
Product Dimensions	PCI220USBLP: 140 x 81 x 36mm PCI420USB: 127 x 120 x 20mm
Product Net Weight	PCI220USBLP: 45g PCI420USB: 45g

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a lifetime warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.