


FLEXSTEEL®

Sectional

Important Notes

Read these instructions carefully, and familiarize yourself with each procedure before assembling the furniture. Check that you have all the component parts, and familiarize yourself with each part before proceeding.

Take all the fittings out of the plastic bag and separate them into groups. Ensure you have enough space to lay out all the parts before assembly. To prevent damage to the parts, we recommend that you assemble the unit on a soft, level surface.

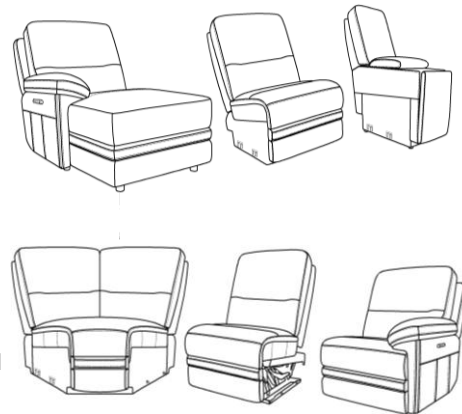


Part List for Power Chaise Right/Left Arm

A. Back
1 piece



B. Seat
1 piece



C.
Transformer
1 piece



D. Wooden Leg
with washer
4 pieces




Part List for Armless Chair

A. Back
1 piece



B. Seat
1 piece




E. Extension
cable




Part List for Console

A. Back
1 piece



B. Seat
1 piece




C.
Transformer




Part List for Corner

A. Back
2 pieces




B. Seat
1 piece




Part List for Armless Recliner

A. Back
1 piece



B. Seat
1 piece



F. Y-splitter
1 piece




Part List for Power Recliner Right/Left Arm

A. Back
1 piece



B. Seat
1 piece



C.
Transformer



STEP 1

Remove the pack of Wooden Leg (C) of Chaise from the blue spring. Screw in the 4 wooden legs of Chaise with Washer (C) by turning Wooden legs (C). (See Figure 1)

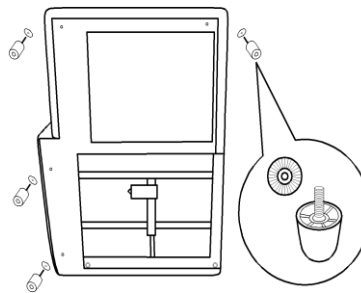



Figure 1

STEP 2

Flip over the Seat (B) of Chaise / Recliner Right / Left Arm / Console / Armless Recliner, and detach the transformers (C) and Y-Splitter (F). (See Figure 2) Return the Seat (B) to its upright position. To avoid damage to the cable, make sure it is clear of the metal base.

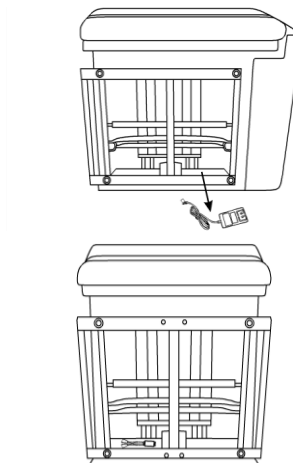




Figure 2

STEP 3

Attach the Back (A) to the Seat (B). Ensure the latches fit well. Attach the zippers to connect the flap between the back (A) and the seat (B). (See Figure 3)

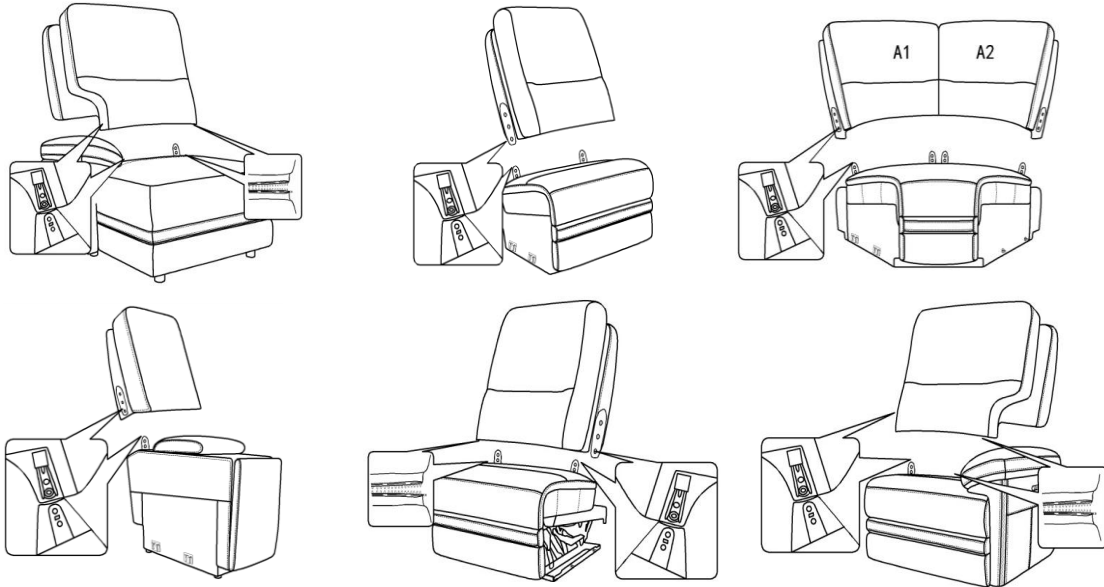


Figure 3

STEP 4

Flip up the back flaps. Connect two cables with headrest labels and two cables with lumbar labels for Chaise / Recliner Right or Left Arm / Armless Recliner then place them behind the flaps. (See Figure 4)

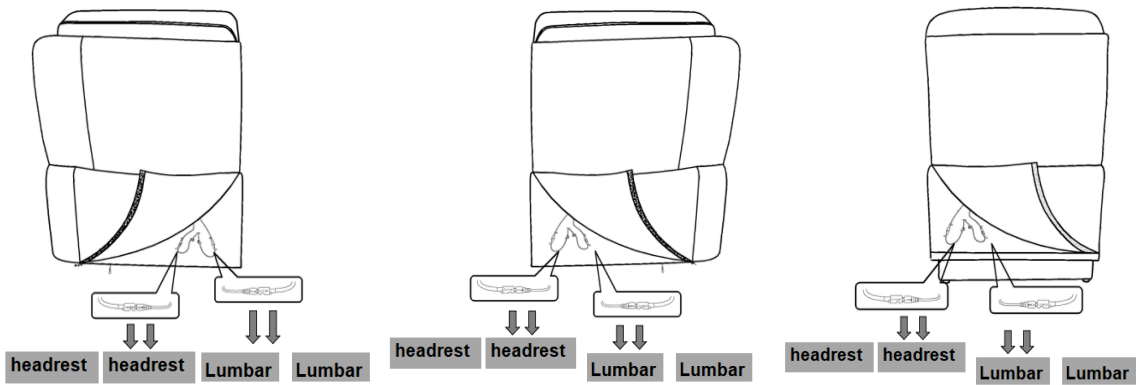


Figure 4

STEP 5

Attach the back flaps to the bottom of the furniture. (See Figure 5)

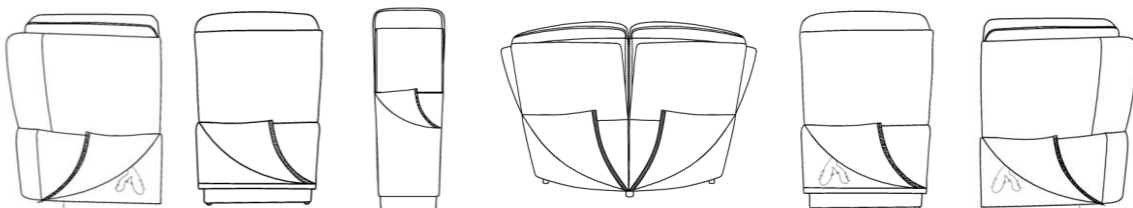


Figure 5

STEP 6

Connect each individual pieces together. Raise up the item with the bolt (male connector) and connect to the item with the female connector or the item with mechanism connecting point. (See Figure 6)

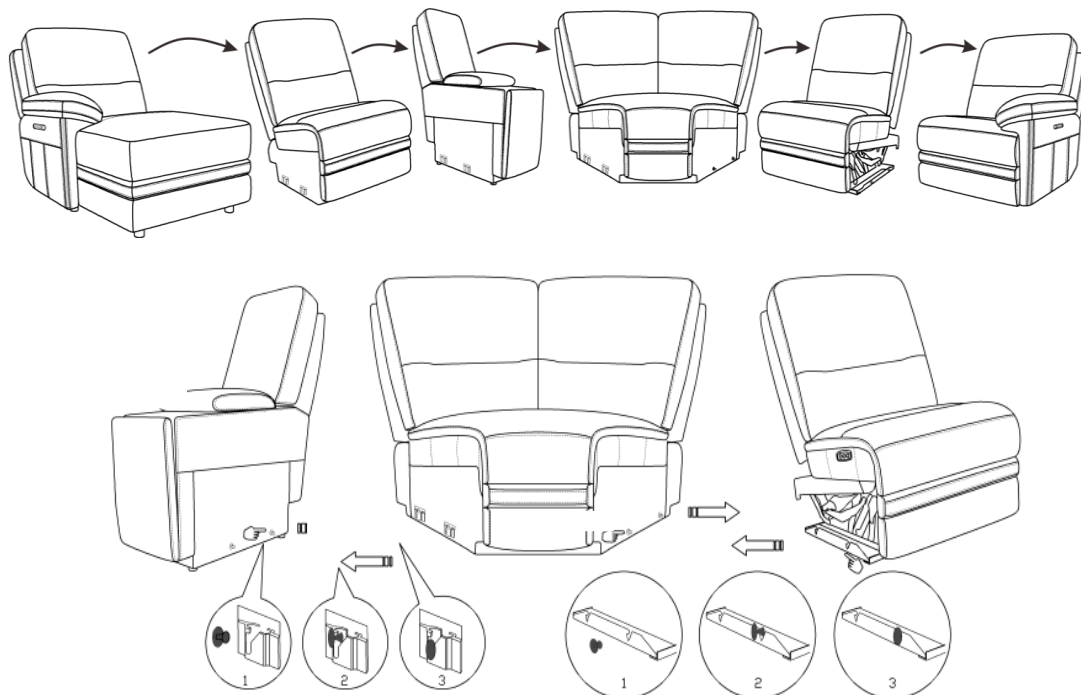


Figure 6

STEP 7

Connect both the cables coming out of the bottom back of the piece (Chaise Right / Left Arm or Power Recliner Right / Left Arm + Armless Recliner) each to the two end of Y-Splitter (F) then to the transformer (C) directly. (See Figure 7)

If the extension cable (E) is needed: disattach the back flaps to the bottom of the Armless Chair then remove the extension cable (E) from the bottom. Connect the two end of the extension cable (E) each to the one cable coming out of the bottom back of the piece and one end of Y-Splitter (F). (See Figure 8)

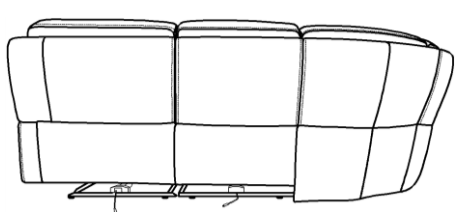


Figure 7

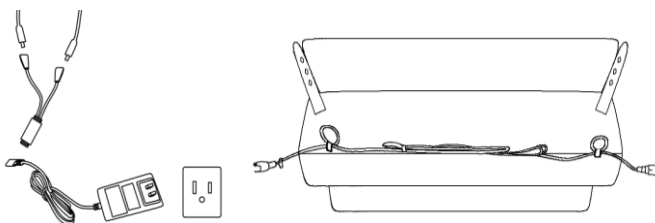


Figure 8

STEP 8

Plug the transformers (C) into nearby outlets, still making sure they are clear of the metal base. (See Figure 7)

To remove the Back (A), disconnect the headrest and lumbar motor connections behind the back flaps and unzip the zipper between the back (A) and the seat (B). Pull up on the leaf springs attached to the brackets, and lift the back (A) away from seat (B). (See Figure 8)

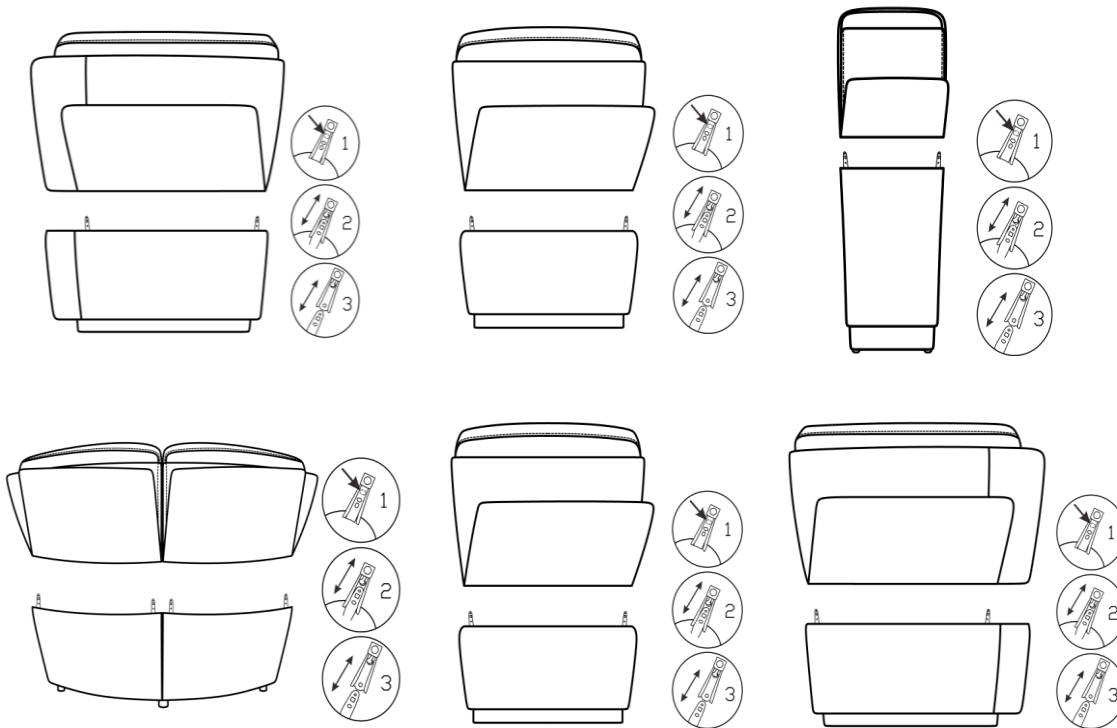


Figure 8

Important Notes

- To avoid any risk of suffocation to children or pets, dispose of all plastic bags immediately.
- If the reclining functions are not working properly, check for loose cable connections before contacting the retailer.