

FEIT ELECTRIC

APP USER GUIDE

Dual Lens Panoramic Floodlight Camera

For 24/7 customer support, visit feit.com/help

System Requirements
 iOS 11.0, Android™ 6.0
 Marshmallow or higher
 - Dedicated 2.4GHz Wi-Fi Network -

Your screen images may differ from this user guide.

BEFORE USING THIS USER GUIDE SEE INCLUDED INSTALLATION GUIDE FOR PROPER PRODUCT INSTALLATION.

NOTE: Only works with 2.4GHz Wi-Fi networks.
 Go to your Wi-Fi settings and connect your phone to your 2.4GHz Wi-Fi network.

1 Download the **Feit Electric App**.

Download on the App Store | GET IT ON Google Play

Set Up Device

2 Launch the **Feit Electric App**. Enter email address to register or log into your account. Then tap **Continue**. A verification code will be sent to your email.

3 Create a password then tap **Done**.

4 **Adding Device**
 Tap + in the upper right corner.

NOTE: If this is the first device you are setting up, you can also select Add Device.

5 Tap **Security & Cameras** and select **Dual Lens Floodlight Camera**.

NOTE: Please enable Bluetooth for EZ Mode pairing.

Feit Electric is asking to turn on Bluetooth.

6 The first time you power up the **Dual Lens Floodlight Camera**, it will automatically go into pairing mode. The LED indicator light will blink blue. Tap **Confirm** to continue.

7 If the LED is not blinking blue, press and hold the **Reset Button** for 15 seconds or until you hear an audible tone. If it is blinking blue move to step 8.

DETAIL

8 After confirming that you are on a 2.4GHz Wi-Fi network, enter your password then tap **Confirm**.

9 For QR code utilization, follow the instructions in image below.

Hold the phone approximately 6-12 inches from the security camera. Tap **I heard the beep** when you hear an audible tone.

10 The **Adding device** status window will appear. Wait until the connection is complete. If the device is added successfully move to step 13.

11 If you see this error message, check the troubleshooting options below then **Retry**.

12 Alternate connection option is available. Tap + in the upper right corner.

A Tap **Security & Cameras** then tap **Dual Lens Floodlight Camera**.

B Tap on the upper right corner and select **EZ Mode**.

13 Once device is successfully added, tap the **Pen** icon to rename the device. Then save the name and tap **Done**.

A Once device has been renamed, **1** Tap **Save** **2** then tap back "<" **3**.

B Then tap **Done**.

Use Device

1 Tap the device icon to enter the control panel.

2 From the control panel you can access features and control your floodlight.

3 Scroll down for more features.

4 **See Live Streaming**
 You will see live streaming video from your camera and be able to take action if needed.

NOTE: You can talk to visitors, playback stored video, or capture video and screenshots of the live stream to your mobile device.

5 Select **HD** or **SD** video quality to view on the device screen.

NOTE: Video always records to the MicroSD card in HD, so it can be reviewed later.

6 **Screenshot**
 Tap **Screenshot** to save a screenshot of the video to your **Gallery**.

7 **Talk**
 Tap the **Phone** icon to speak to visitors. Make sure the sound icon is ON to hear audio.

8 **Capture Video**
 Tap the **Video Cam** icon to start recording and save the video to your **Album**. Tap the same icon to stop recording and save.

9 **Playback**
 Tap **Playback** to view recording or screenshots or download events from your local MicroSD card.

A In **Playback**, swipe on the time bar to view the recorded video. Motion activated video always records in HD to the MicroSD card for clear Playback.

10 **Light**
 Tap **Light** to adjust brightness, set schedules or turn the lights On/Off.

A Tap **Switch** to turn on light and adjust the brightness. Tap **Switch** again to turn off.

B Tap **Schedules** from the light menu to set a time for your lights to go on/off.

C Tap **Add**.

D Choose a time to schedule your light to go ON/OFF. To repeat on certain days of the week. Tap on the days listed, once selected they will turn green. Make sure **Light Switch** is set to on.

E Click **Save** on the top right corner once you have selected the time

11 **Motion**
 Tap **Motion Detection** to activate. Button will turn red.

A Tap the **PIR** button to set zones, timers, and sensitivity. Turn zones on/off by tapping on the area.

B Adjust the motion detection sensitivity by tapping **Low**, **Middle** or **High**.

C Set the length of time the lights and recording will stay on after motion is detected.

NOTE: Lights will go On at night if motion is detected. You can also turn lights On/Off via app.

12 **Siren**
 From control panel scroll down to sound the **Siren**. Tap **Siren** then tap on power button to turn on.

13 **911**
 From control panel scroll down to call 911. Tap **911** then tap on "Call 911" button.

14 **Device Sharing**
 Device Settings are available on the control panel by tapping (☰). Device Settings include: Basic Settings, Advance Settings, Storage and Others.

15 Adjust Basic Feature Settings

From the device Settings, tap **Basic Feature Settings**.

Indicator Light - turn Indicator Light On/Off.



Flip Camera Screen - flip Camera Screen 180 degrees.



Time Watermark - turn time stamp On/Off.




Audio Mode - One-Way, Talk and Audio works one way at a time. Two-Way, Talk and Audio works at the same time.




16 Select SD Card and Record Setting

From the device Settings, tap **SD Card and Record Settings**.




NOTE: Maximum microSD card storage is 128GB. Do not use a microSD card that exceeds this capacity.




NOTE: Make sure **Record Switch** is ON to record video. In **Recording Mode**, choose between **Event Recording** (record only when motion is detected) or **Continuous Recording** (record 24/7).

17 Notifications


To enable push notifications, exit the control panel then tap **Profile** at the bottom of screen.




18 Tap Settings.

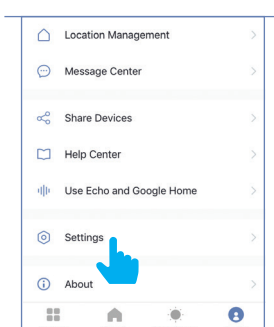


19 Tap on Push Notifications.




A Tap on the toggle button to turn On **Enable Notifications** and receive push notifications.

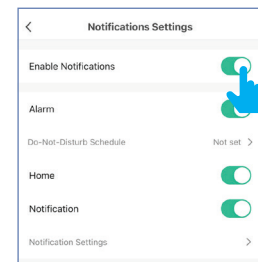

20 Notifications will be stored in the Message Center.

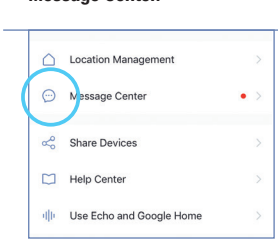


A **Message Center** will display your notifications by date.

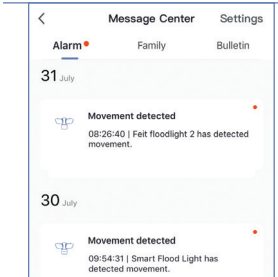


21 Device Sharing


From the Home Page tap **Profile**.




22 Tap Share Devices.

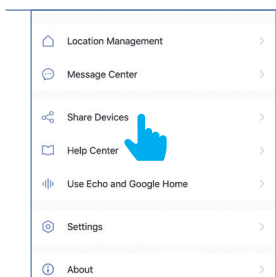


23 Tap Share Devices at the bottom.

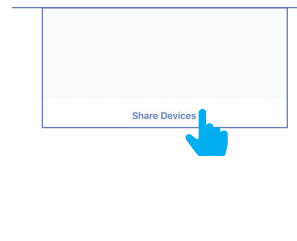

24 Select the device that you wish to share. Tap **Add** in the upper right corner.

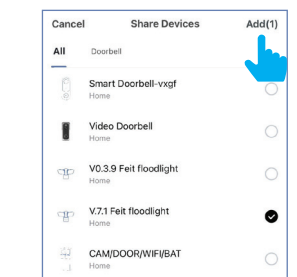


25 Enter the email address then tap Done.

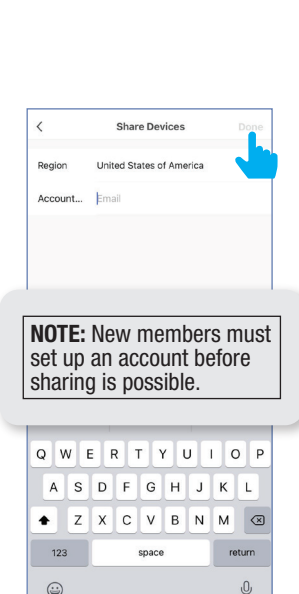

NOTE: New members must set up an account before sharing is possible.


Smart Scenes

1 From the **My Home** page, tap **Smart Scenes** at the bottom of screen.

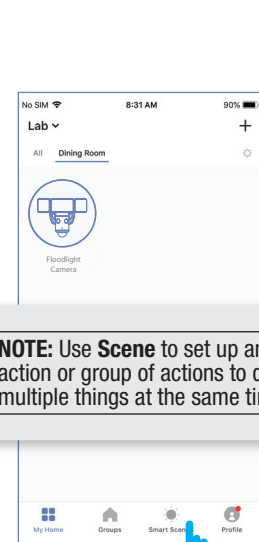


NOTE: Use **Scene** to set up an action or group of actions to do multiple things at the same time.


2 Tap on the **+** icon.




3 Tap on **Launch Scenes**.




4 Tap on **Run the device**.




5 Select your device to execute an action.

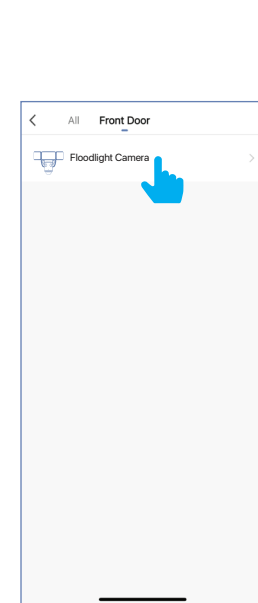


6 On the **Select Function** screen, tap on the action you want the device to perform.




A For example, on the **Recording Mode** screen, tap **Event Recording** or **Continuous Recording**, then **Save**.




7 Once you have configured your action(s), tap **Save**.



8 Your action(s) will appear under **Scene** tab.

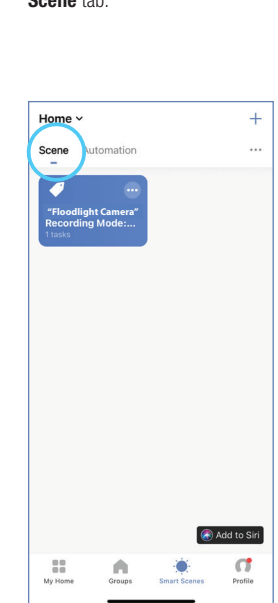


9 It will also appear on the top of your **My Home** screen. Tap to execute your action(s).

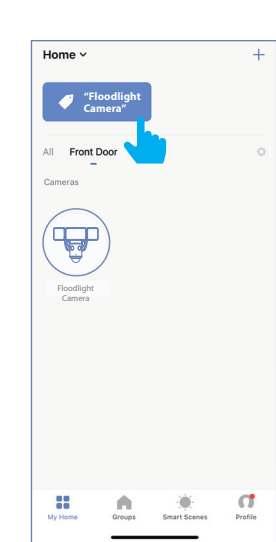


Automation

1 From the **My Home** page, tap **Smart Scenes** at the bottom of screen.

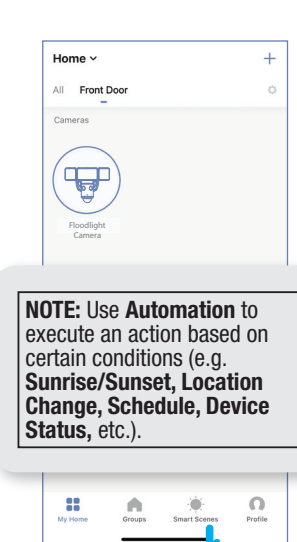


NOTE: Use **Automation** to execute an action based on certain conditions (e.g. **Sunrise/Sunset, Location Change, Schedule, Device Status, etc.**).


2 Tap on the **+** icon.

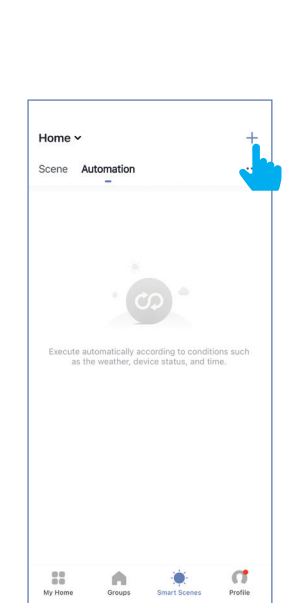


3 Set a condition you would like to trigger.

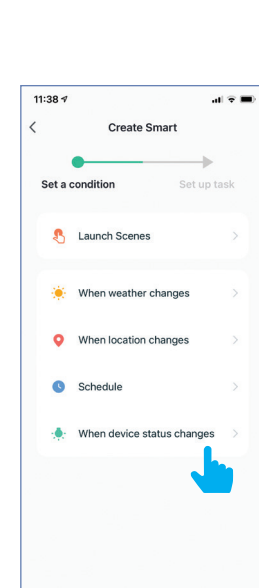


4 Set up a task you would like to automate.

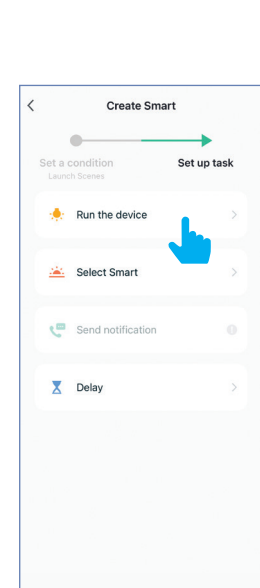

5 Review your automations, edit them if necessary, then **Save**.

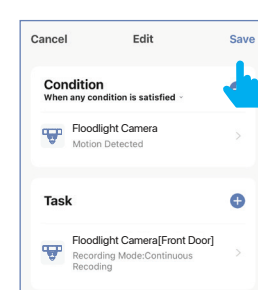


6 Your Automation will appear under the **Automation** tab.




Enable Siri Shortcuts® (for use with iPhone)

1 From the **My Home** page, tap **Smart Scenes** at the bottom of screen.

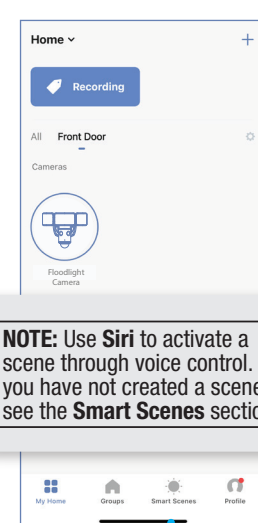


NOTE: Use **Siri** to activate a scene through voice control. If you have not created a scene, see the **Smart Scenes** section.


2 In the **Scene** Tab, tap **Add to Siri** located at the bottom of the screen.

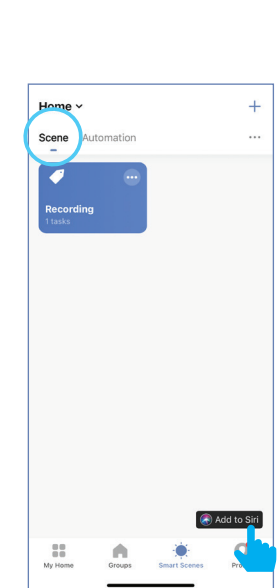


3 In the **Siri Shortcut** screen, tap on the action you would like to add to **Siri**.

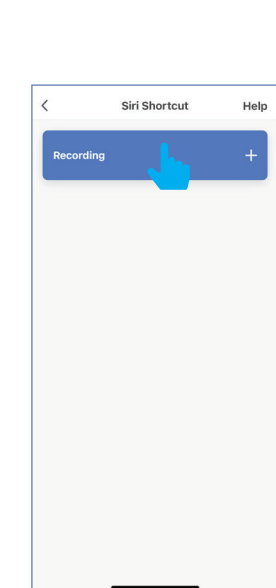

4 On the **Add to Siri** screen, give it a name. then tap on **Add to Siri** at the bottom of the screen.

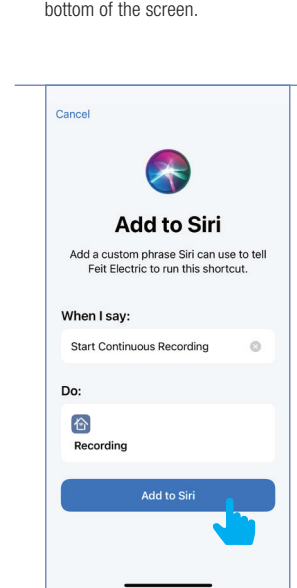


5 Now you can use the "Hey Siri" command to control this action from your iOS device. **"Hey Siri, start continuous recording."**

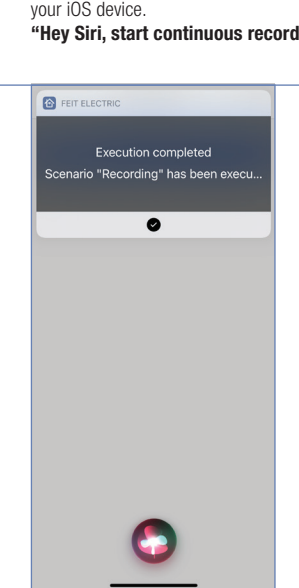


CONNECT TO ALEXA

1 Tap on **Profile** at bottom right. Tap on **Use Alexa and Google Assistant**.

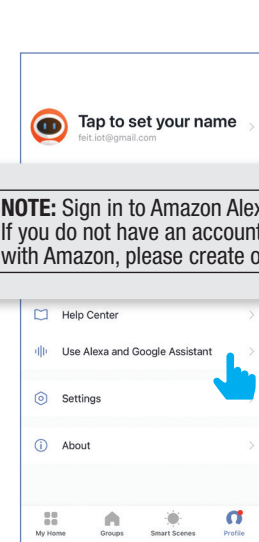


NOTE: Sign in to Amazon Alexa. If you do not have an account with Amazon, please create one.


2 Tap on **Amazon Alexa**.



3 Tap on **Link with Amazon Alexa**.

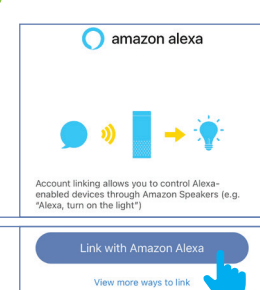

4 Tap on **Link**. You will be linked automatically to your Amazon Alexa app.

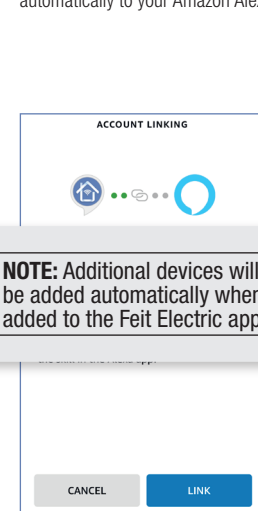


NOTE: Additional devices will be added automatically when added to the Feit Electric app.

5 Once linked, you can ask Alexa to turn on the lights or change dim level, just say **"Alexa, turn Smart Floodlight on."**


CONNECT TO GOOGLE ASSISTANT

1 Tap on **Profile** bottom right. Tap on **Use Alexa and Google Assistant**.

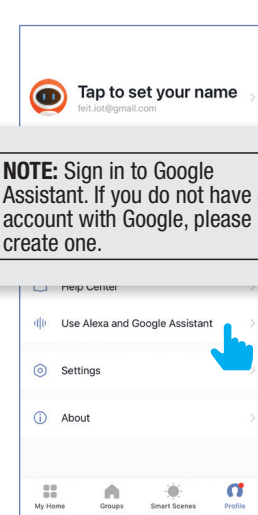


NOTE: Sign in to Google Assistant. If you do not have an account with Google, please create one.


2 Tap on **Google Assistant**.



3 Tap on **Link with Google Assistant**.

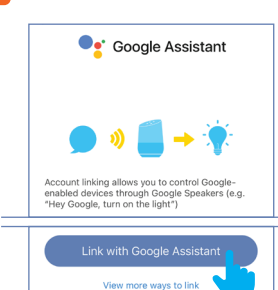

4 Tap on **Link**. You will be linked automatically to your Google Assistant app.

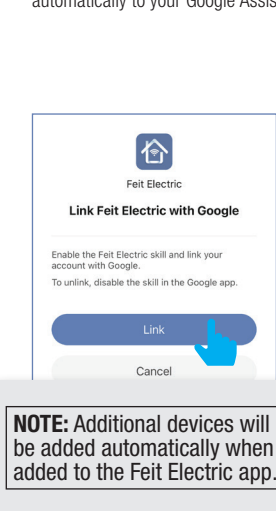

NOTE: Additional devices will be added automatically when added to the Feit Electric app.

5 Once linked, you can ask Alexa to turn on the lights or change dim level, just say **"Hey Google, turn Smart Floodlight on."**

Need Help?

Please refer to our online resources at www.feit.com/help to learn about more features & latest updates

24/7 HELP feit.com/help