


Item # : BR45JOLWD

Assembly Instructions

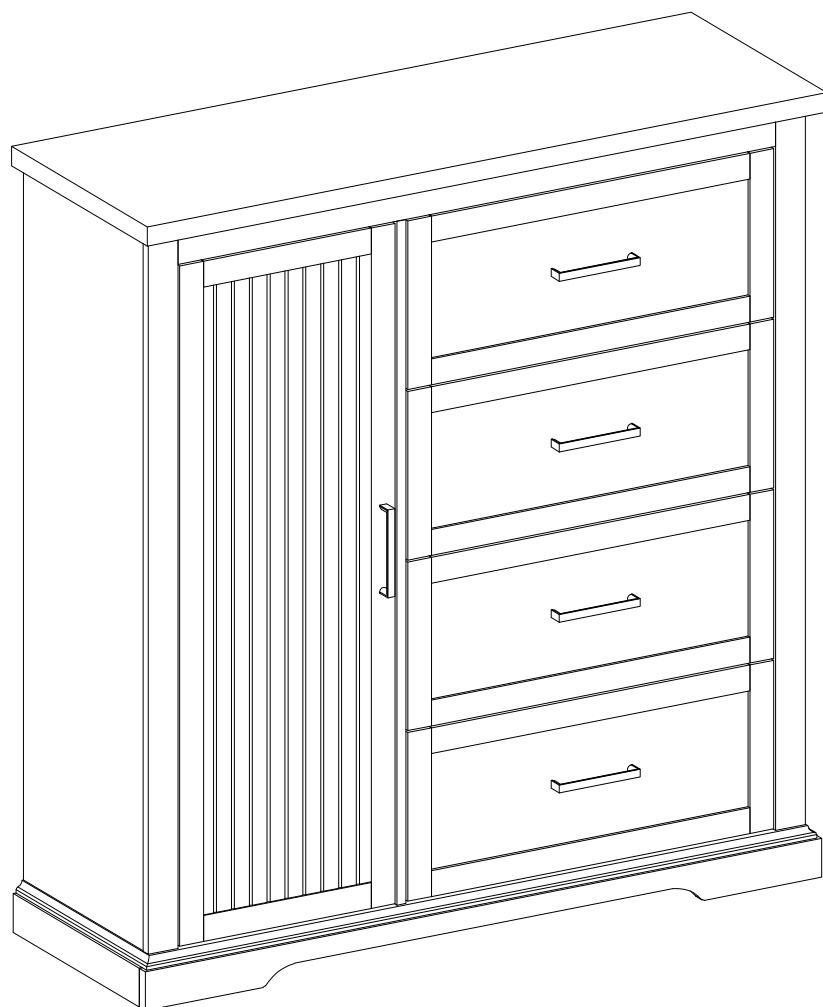


Walker Edison®

*Please visit our website for the most current instructions, assembly tips, report damage, or request parts. **www.walkerediton.com***


Revised 27/10/2020 (L)

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.



- VI. A Phillips head screwdriver is required for the assembly of this product.




- VII. Power tools should not be used to assemble this product.




- VIII. Drill may be needed for securing product to wall.


- IX. Concealed hinges are three-way adjustable.

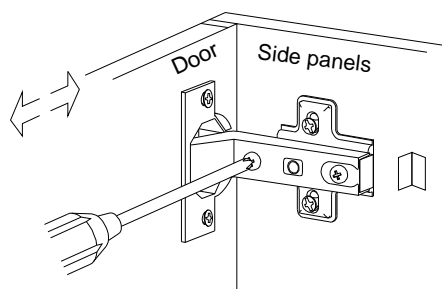

Horizontal
by screw adjustment

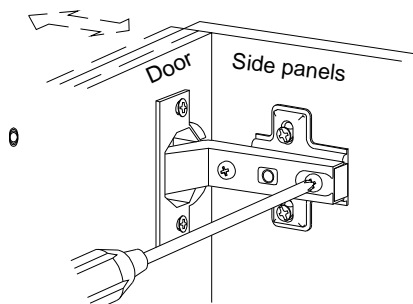


In-and-Out
by loosening the hinge-arm
mounting screw or via cam
adjustment

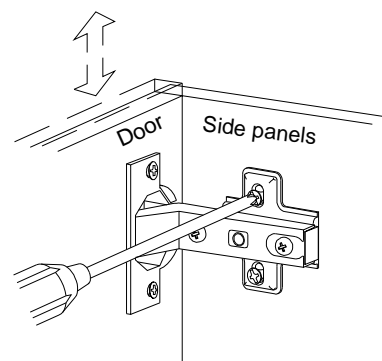



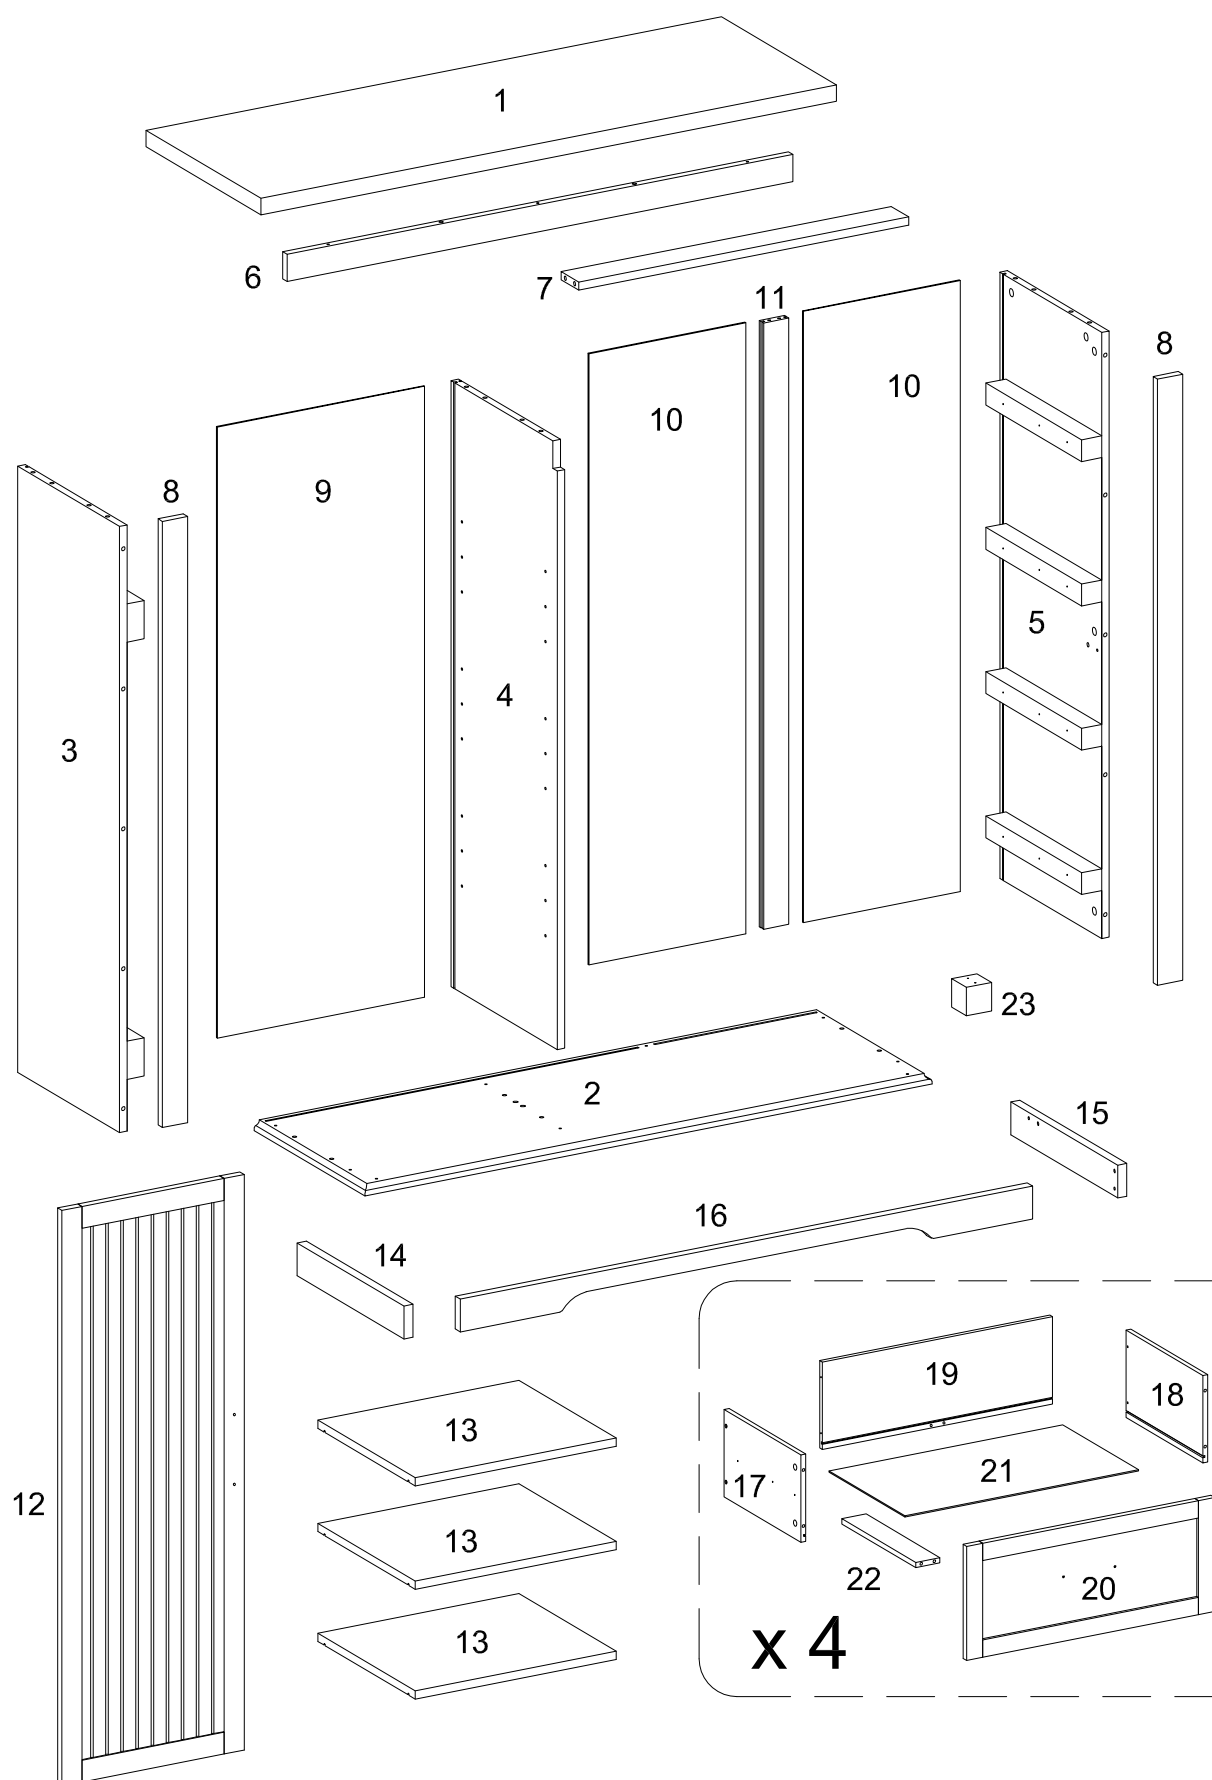


















Vertical
Via slots in the mounting
plate or via cam adjustment

Parts List




Hardware List

A		Ø8x30mm	Wooden dowel	20 pcs
B		Ø6x30mm	Wooden dowel	10 pcs
C		Ø6x35mm	Cam bolt	34 pcs
D		Ø15x11mm	Cam lock	14 pcs
E		Ø15x9mm	Cam lock	20 pcs
F		Ø30mm	Sticker	34 pcs
G			Plastic wedge	24 pcs
H		Ø3x17mm	Screw	24 pcs
J		Ø4x38mm	Screw	23 pcs
K			Handle	5 pcs
L		Ø4x10mm	Handle Bolt	8 pcs
M		Ø4x22mm	Handle Bolt	2 pcs
N			Shelf support pin	12 pcs
P		Ø6x12mm	Bolt	14 pcs
Q			Plastic wedge	7 pcs
R			Velcro strap	2 pcs
S		Ø4x25mm	Screw	2 pcs
T			Nut	2 pcs
U		Ø4x12mm	Screw	2 pcs
V		Ø26	Europe Hinge	2 pcs
W		Ø4x14mm	Screw	12 pcs

Hardware List

X		Ø3x12mm	Screw	48 pcs
Y		M4	Hex Key	1 pc
Z		Ø6x50mm	Screw	9 pcs
AA			Glue tube	2 pcs
BB		12"	Drawer slider	4 Sets


* Note: This piece comes preassembled for shipping purposes and must be disassembled to complete the desk assembly.



Philips head screwdriver required for assembly
(not included)


*The hardware quantities listed above are required for proper assembly.
Some extra hardware may also have been included.*

Step 1

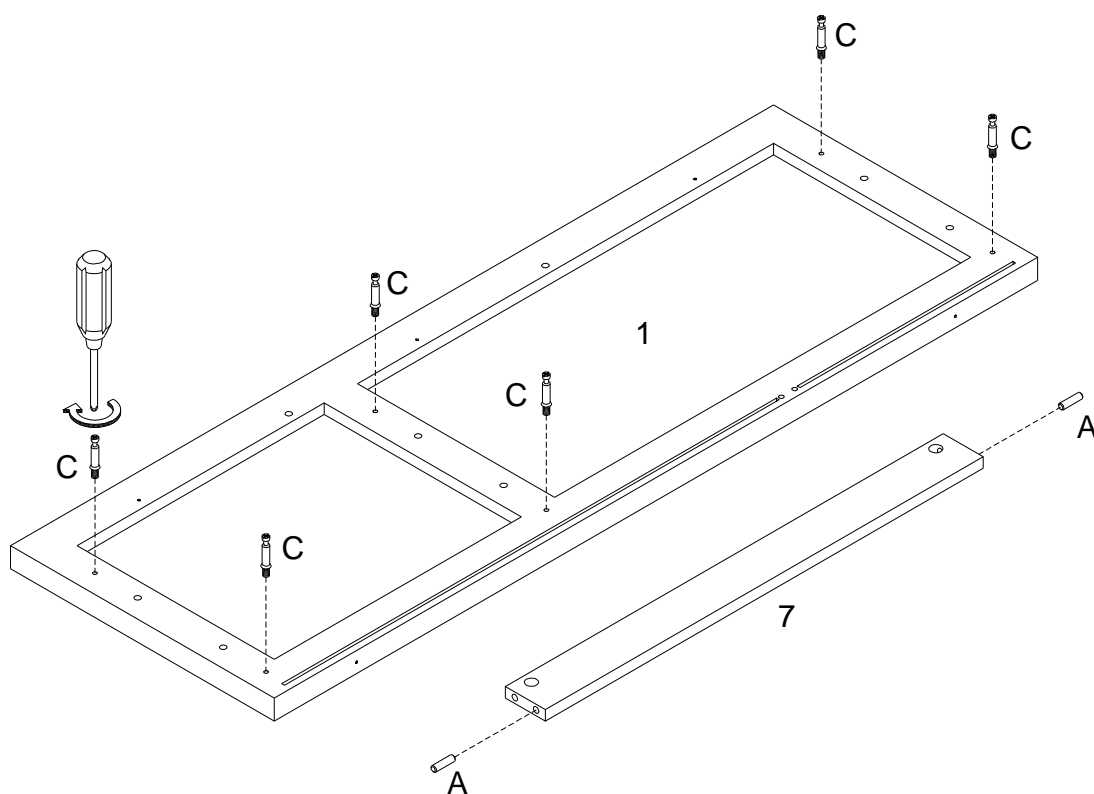


Insert wooden dowel (A) into part (7), then secure cam bolt (C) into part (1) with Philips head screwdriver as per diagram.

Step 2

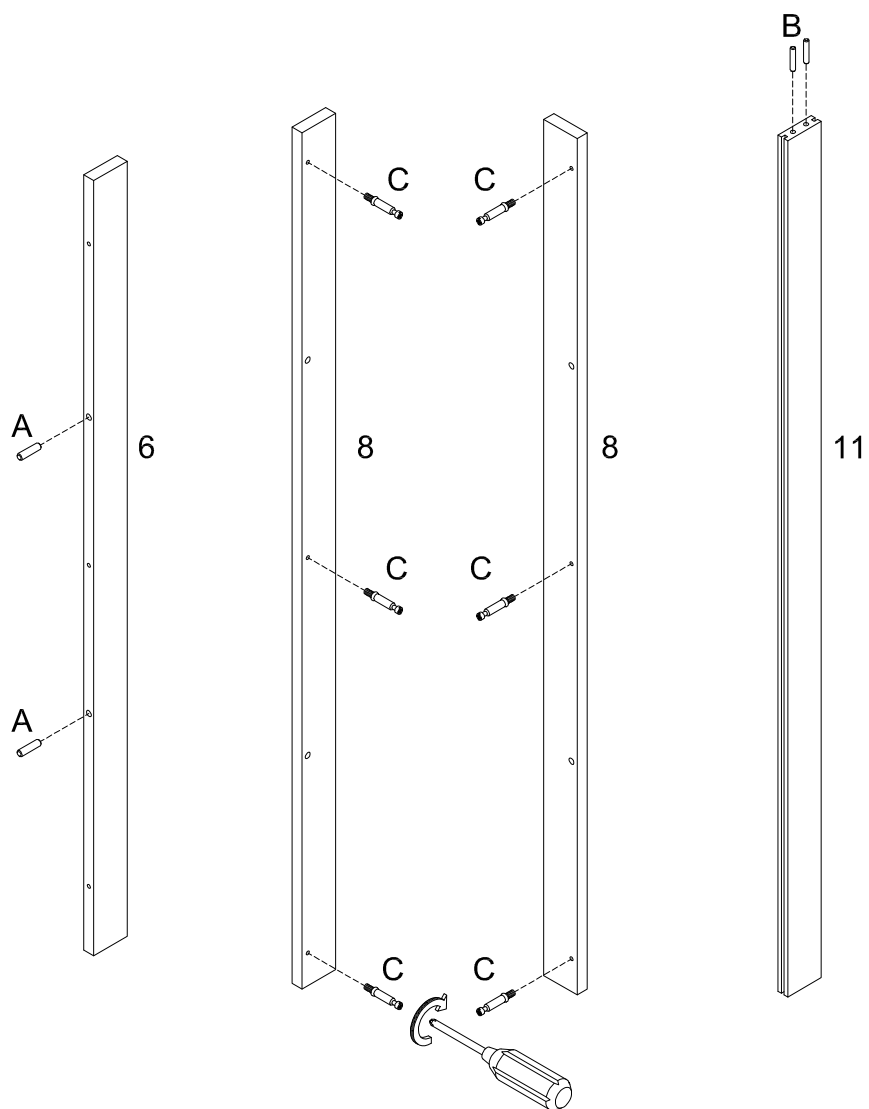


Insert wooden dowel (A) into part (6) and wooden dowel (B) into part (11) , then secure cam bolt (C) into parts (8) with Philips head screwdriver as per diagram.

Step 3

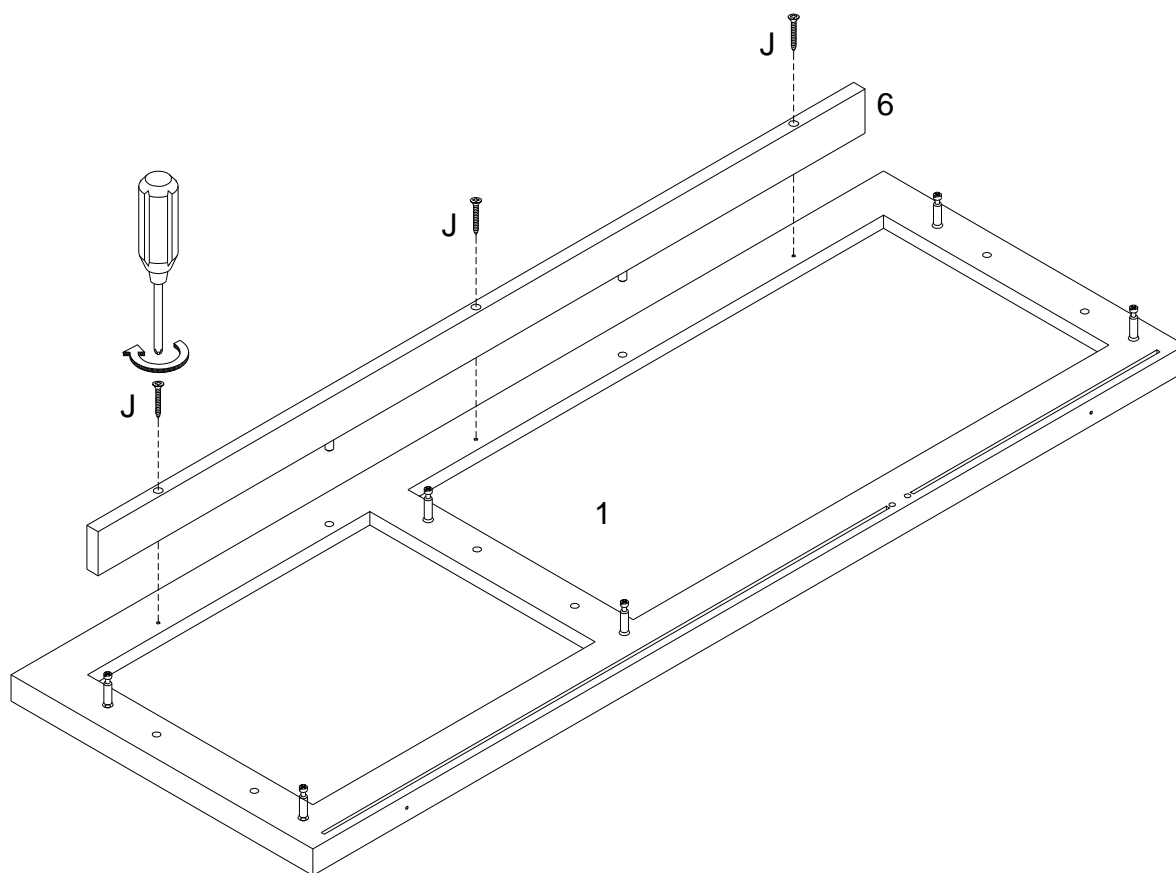


Using screw (J) attach part (6) to part (1) with Philips head screwdriver as per diagram.

Step 4

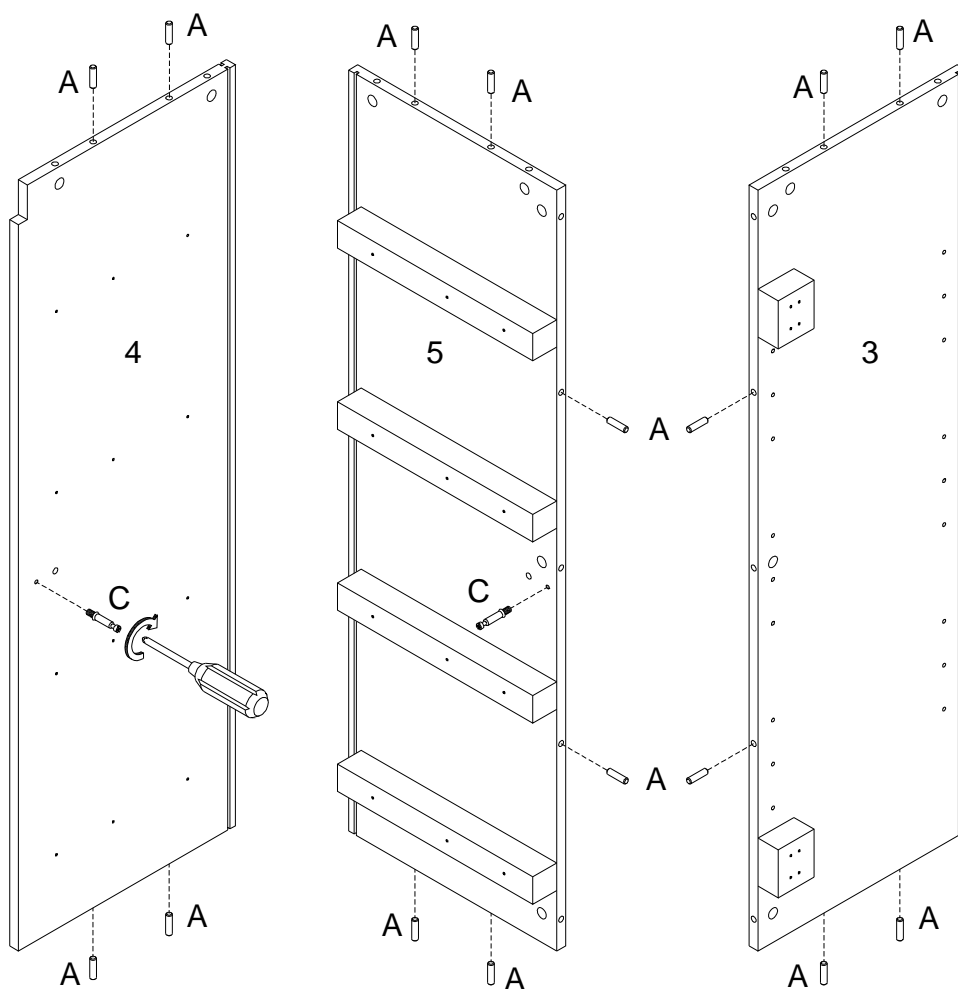


Insert wooden dowel (A) into parts (3,4,5) , then secure cam bolt (C) into parts (4,5) with Philips head screwdriver as per diagram.

Step 5

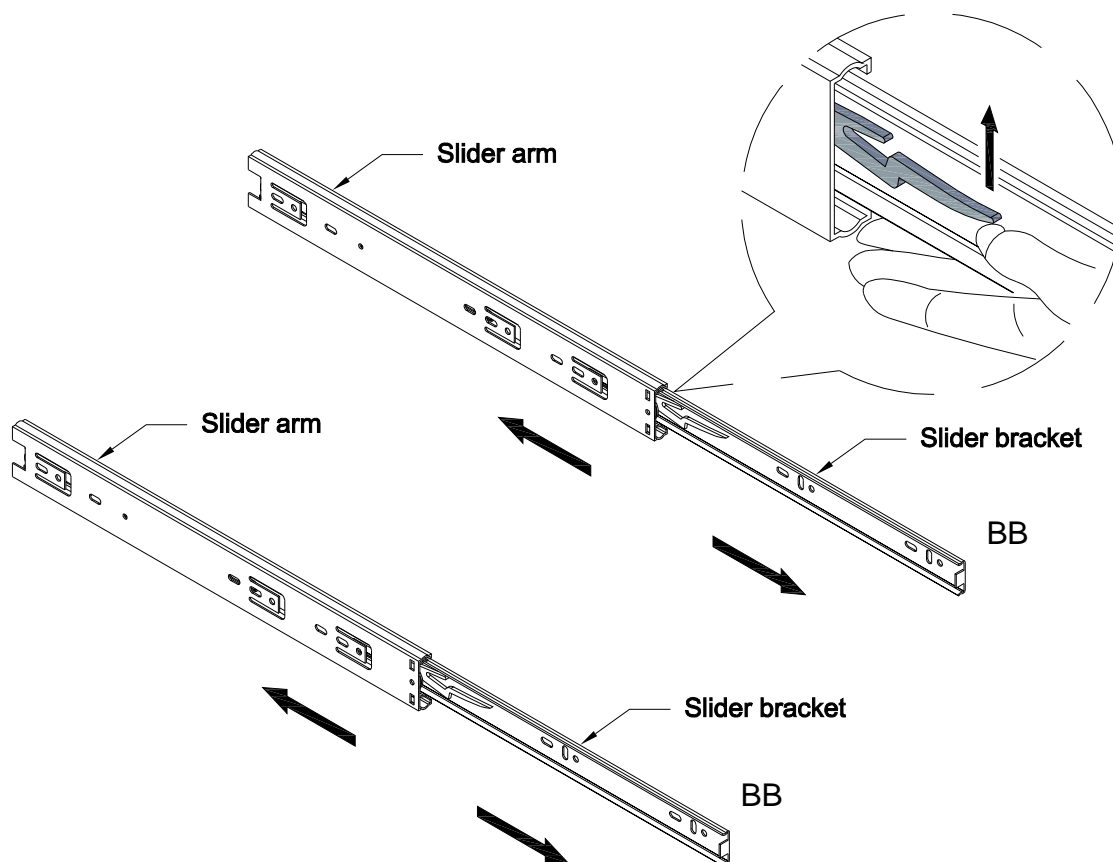


Pick up the slider arm (BB) and separate the slide runner for the following Steps. Extend the slide runner all the way forward, press the plastic release lever of the slider arm up and pull the slide runner complete out .

Step 6

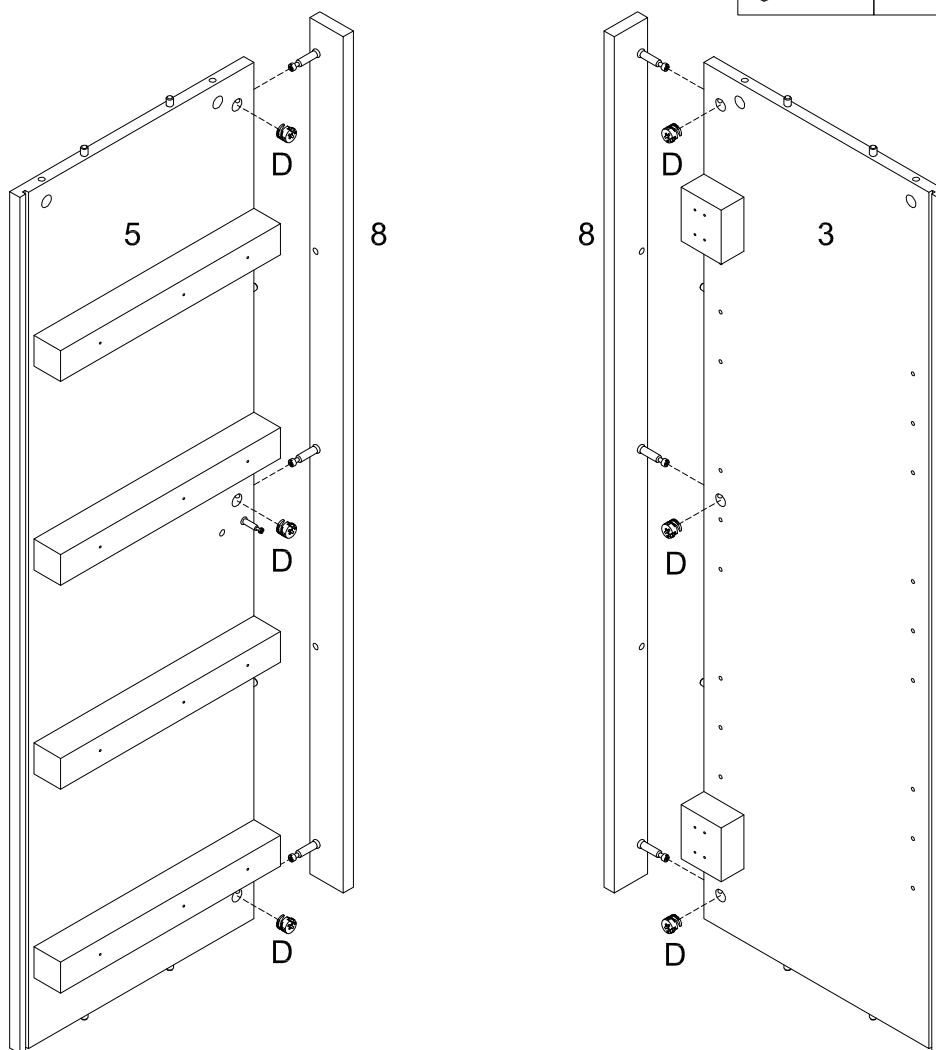



Using Cam lock(D) secure parts (3,5) to parts (8) with Philips head screwdriver as per diagram.

Step 7

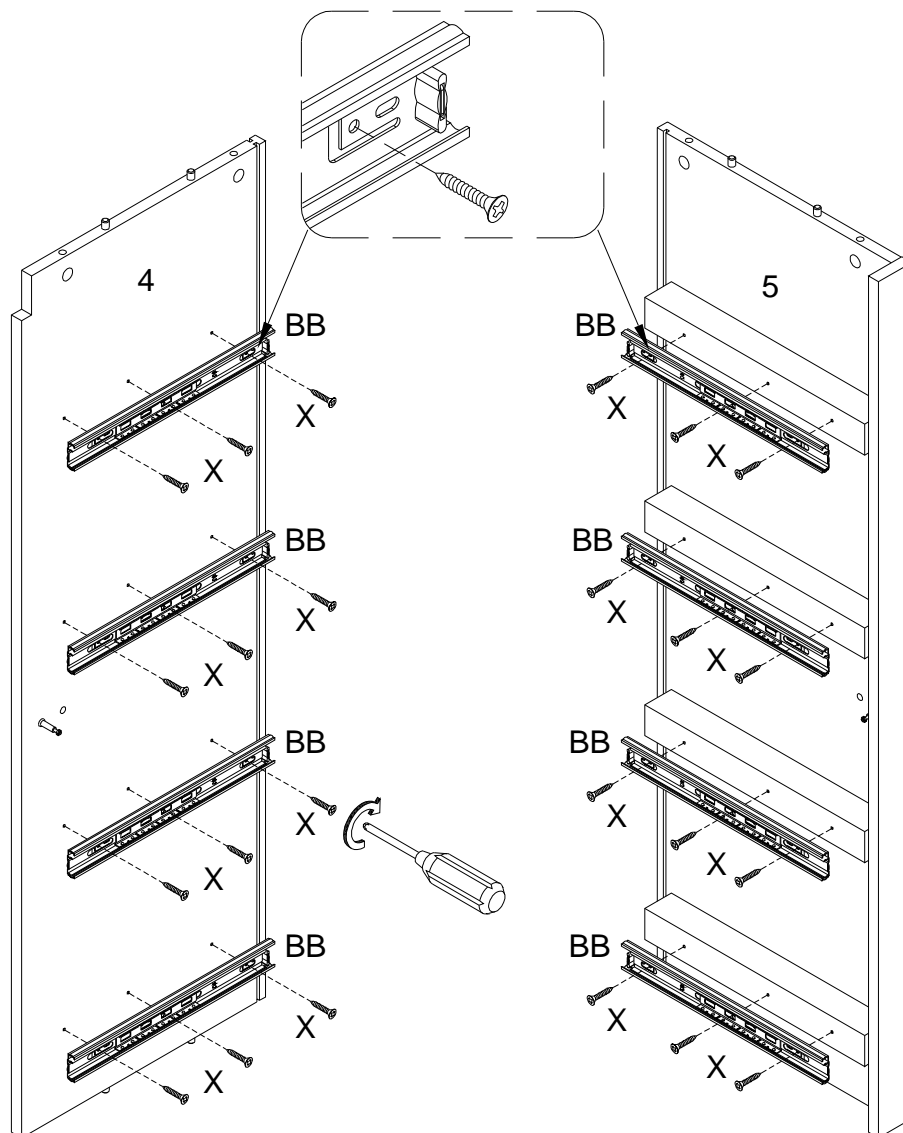



Using screw (X) attach drawer slider (BB) to parts (4,5) with Philips head screwdriver as per diagram.

Step 8

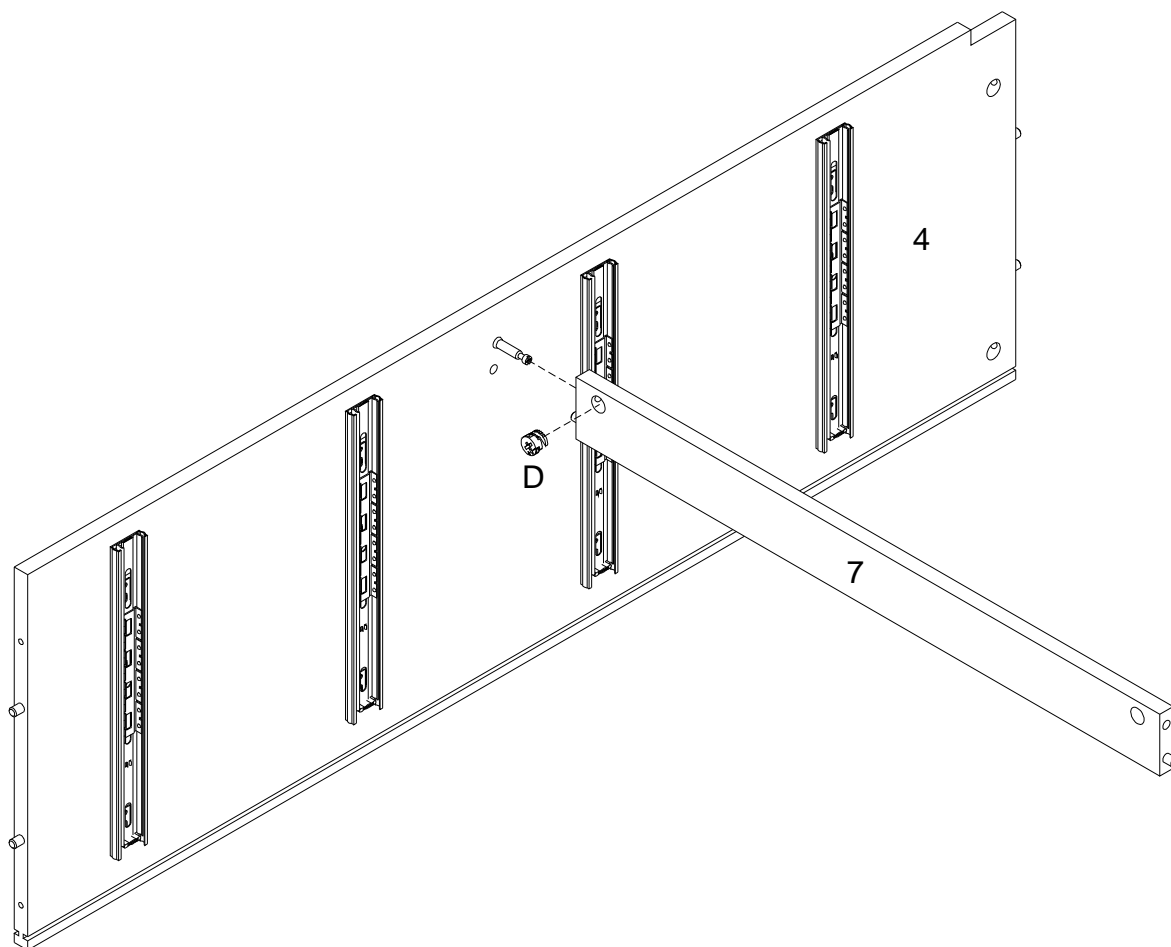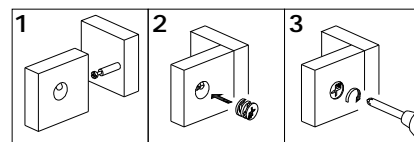



Using Cam lock(D) secure part (7) to part (4) with Philips head screwdriver as per diagram.

Step 9

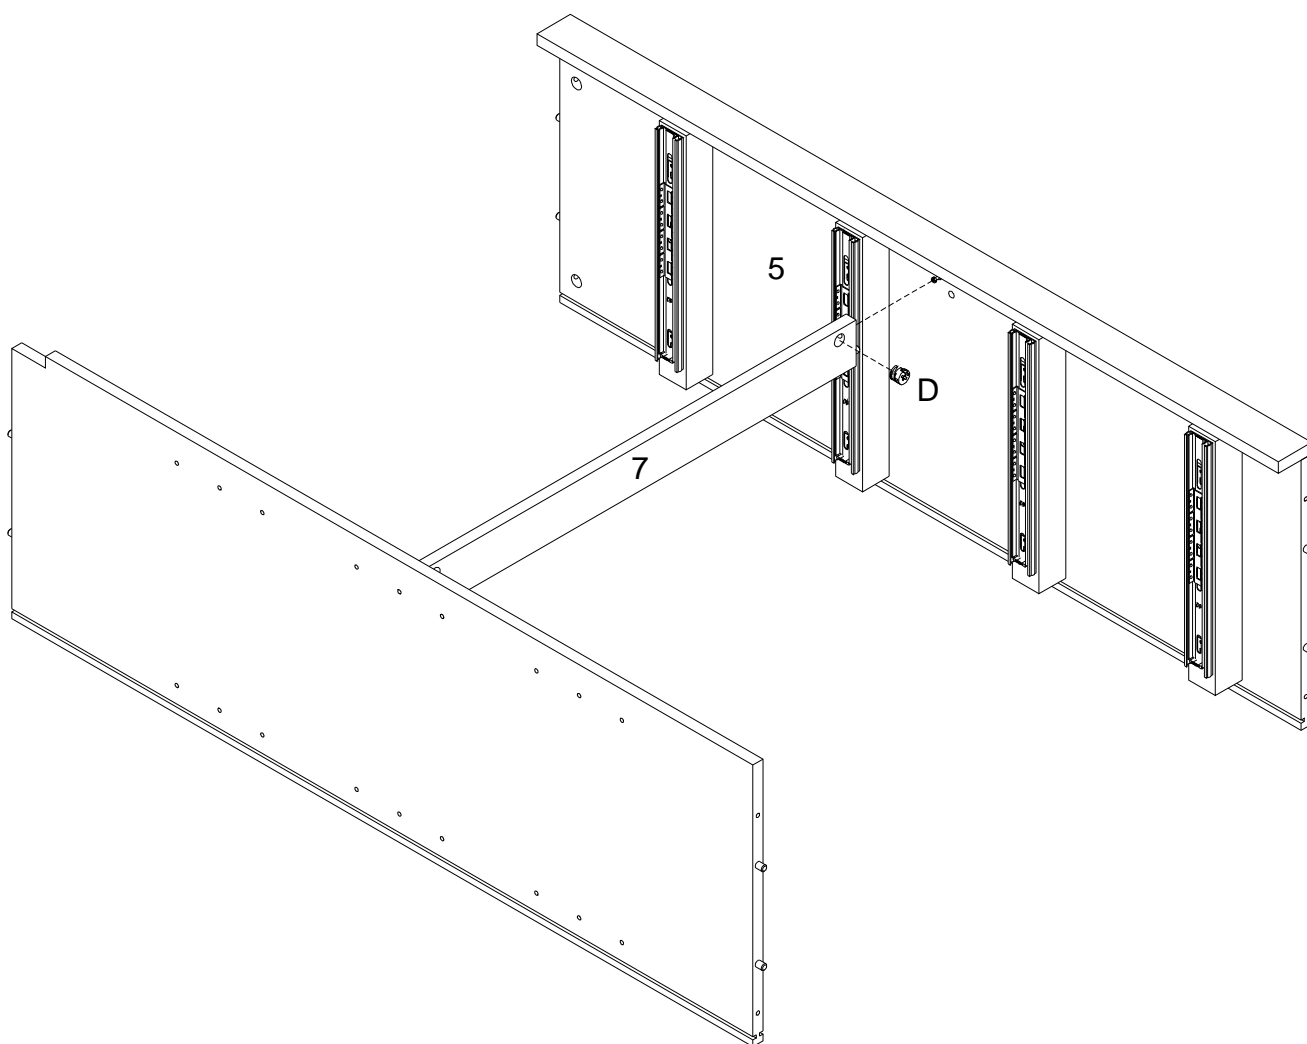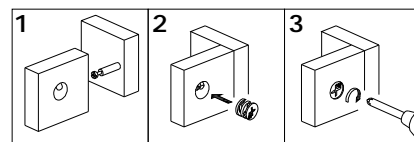


Using Cam lock(D) secure part (7) to part (5) with Philips head screwdriver as per diagram.

Step 10

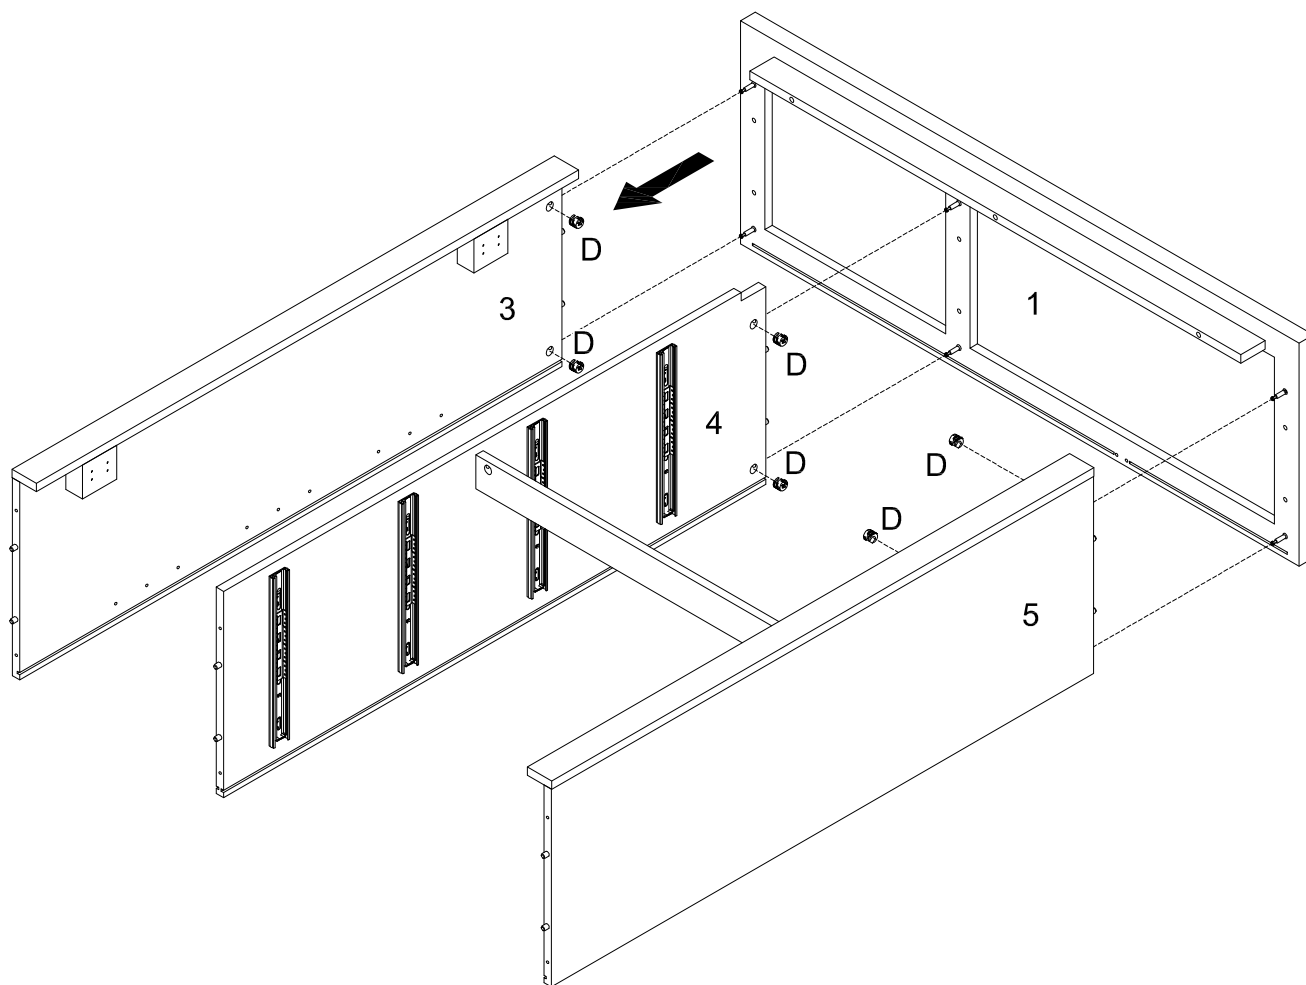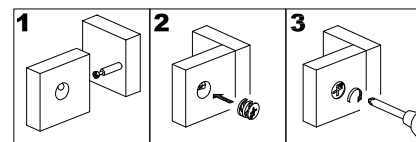


Using Cam lock(D) secure parts (3,4,5) to part (1) with Philips head screwdriver as per diagram.

Step 11

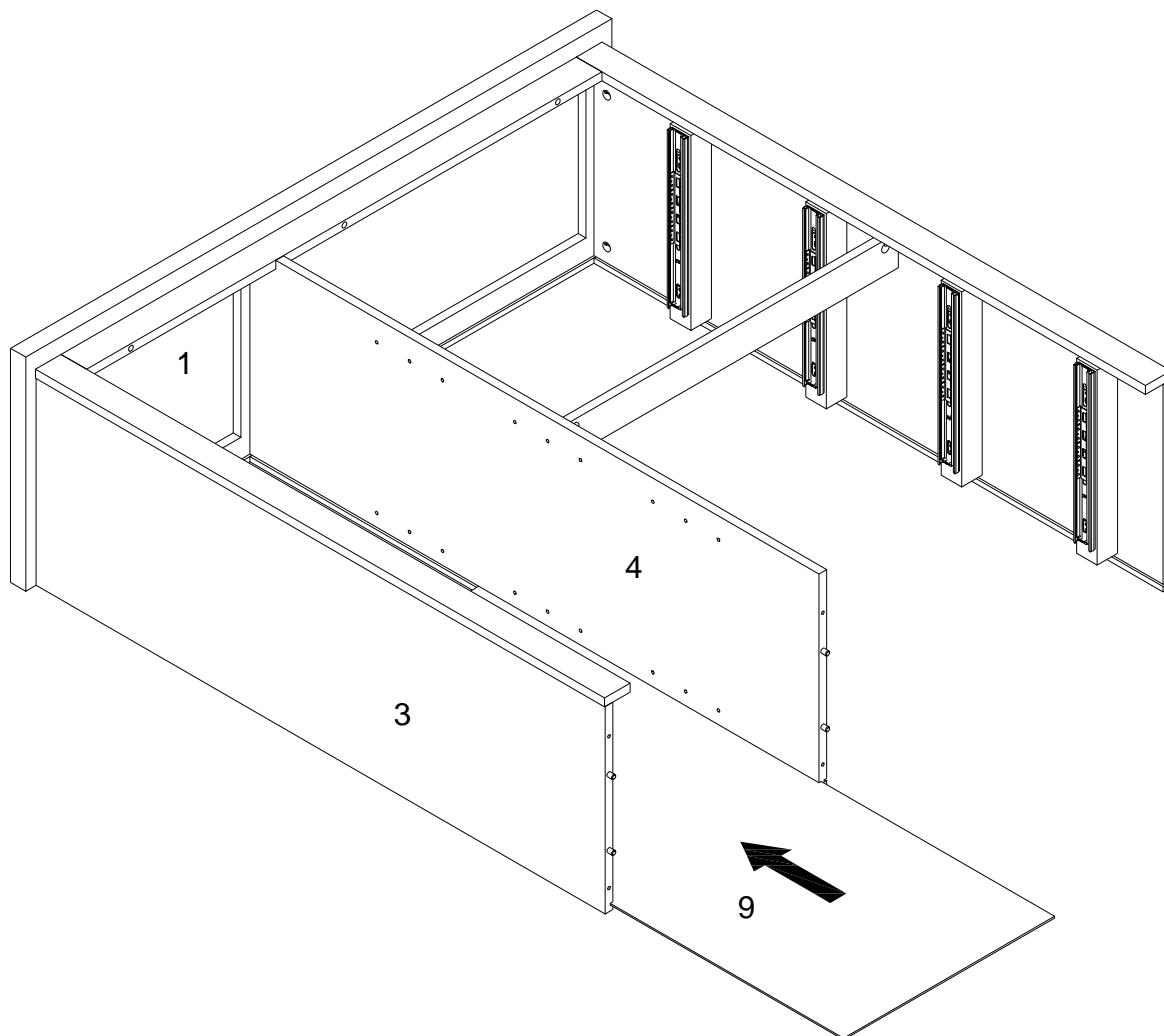


Put part (9) as per diagram.

Step 12

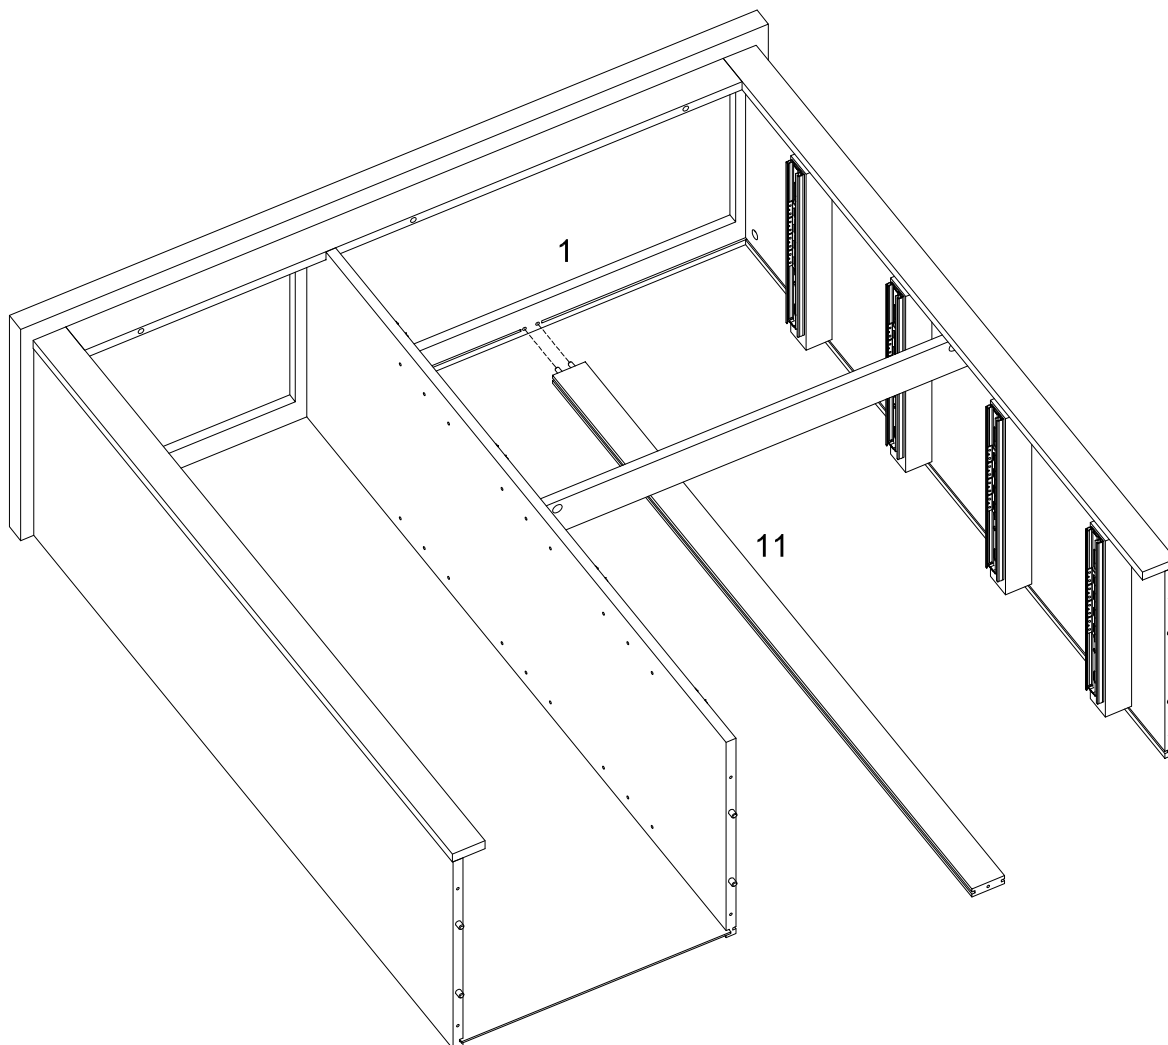


Insert part (11) as per diagram.

Step 13

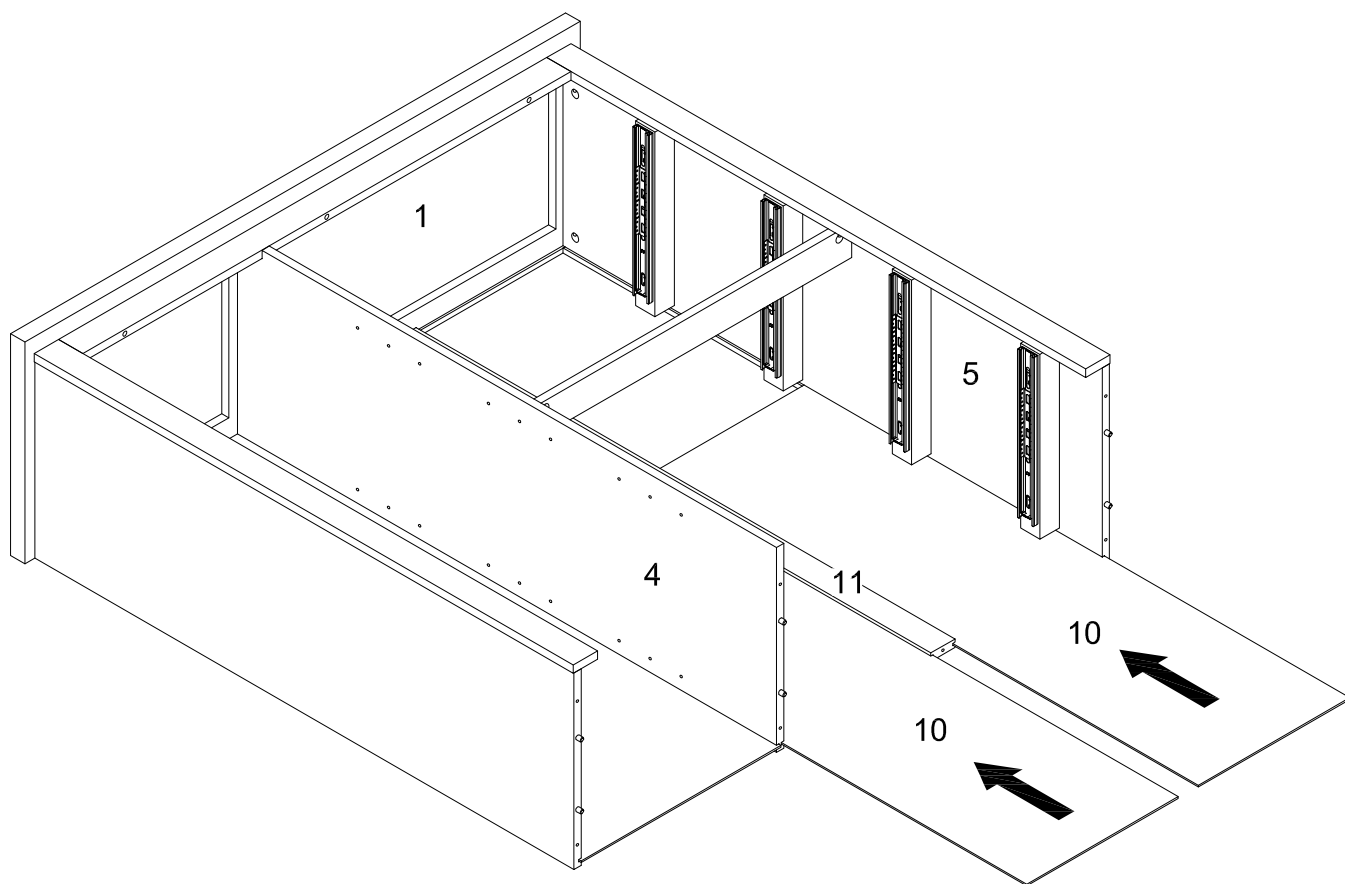


Put part (10) as per diagram.

Step 14

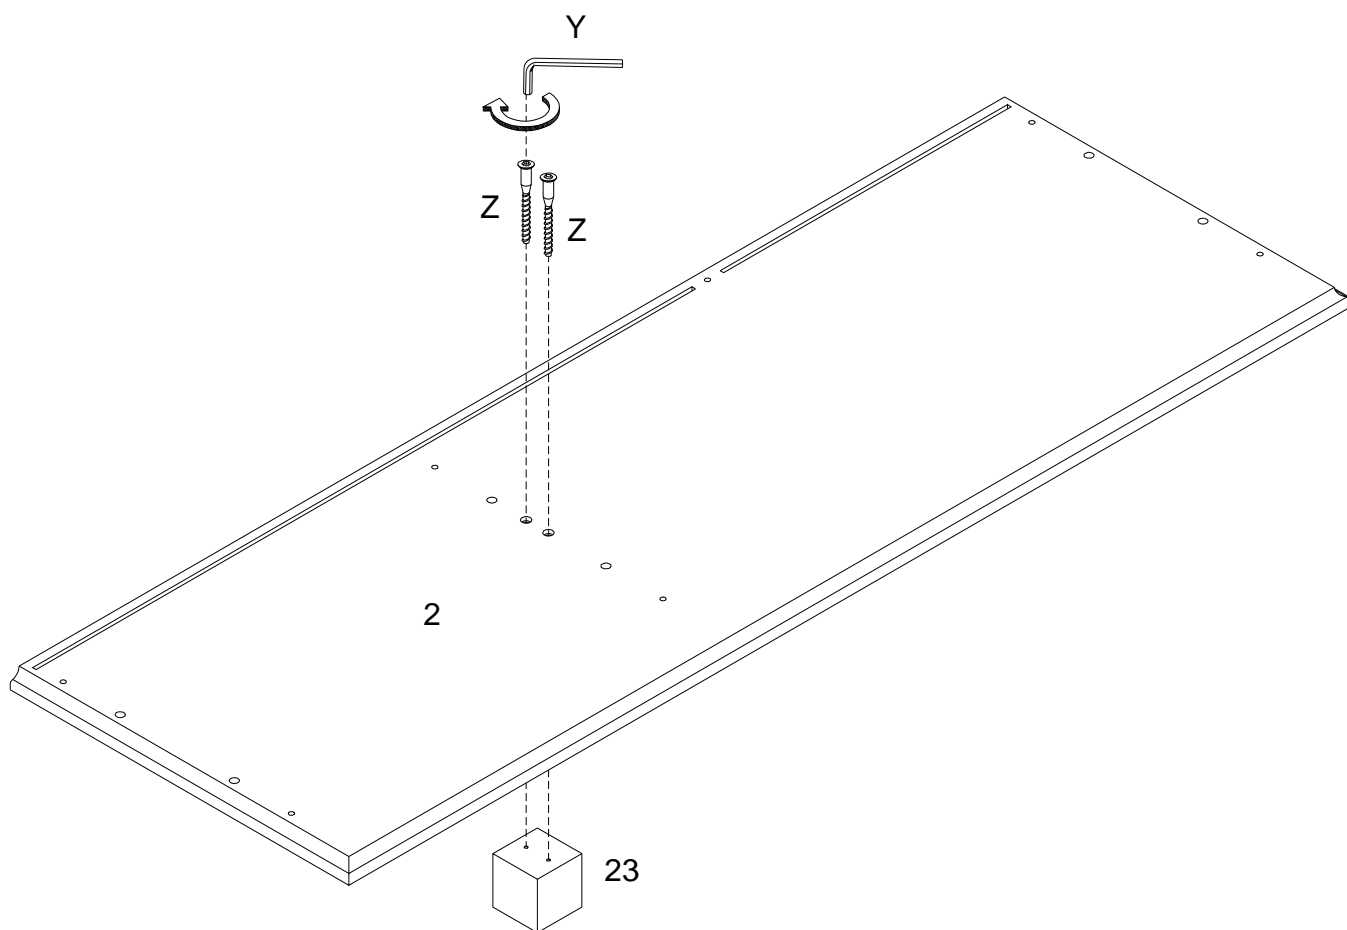


Using screw (Z) attach part (2) to part (23) with Hex key (Y) as per diagram.

Step 15

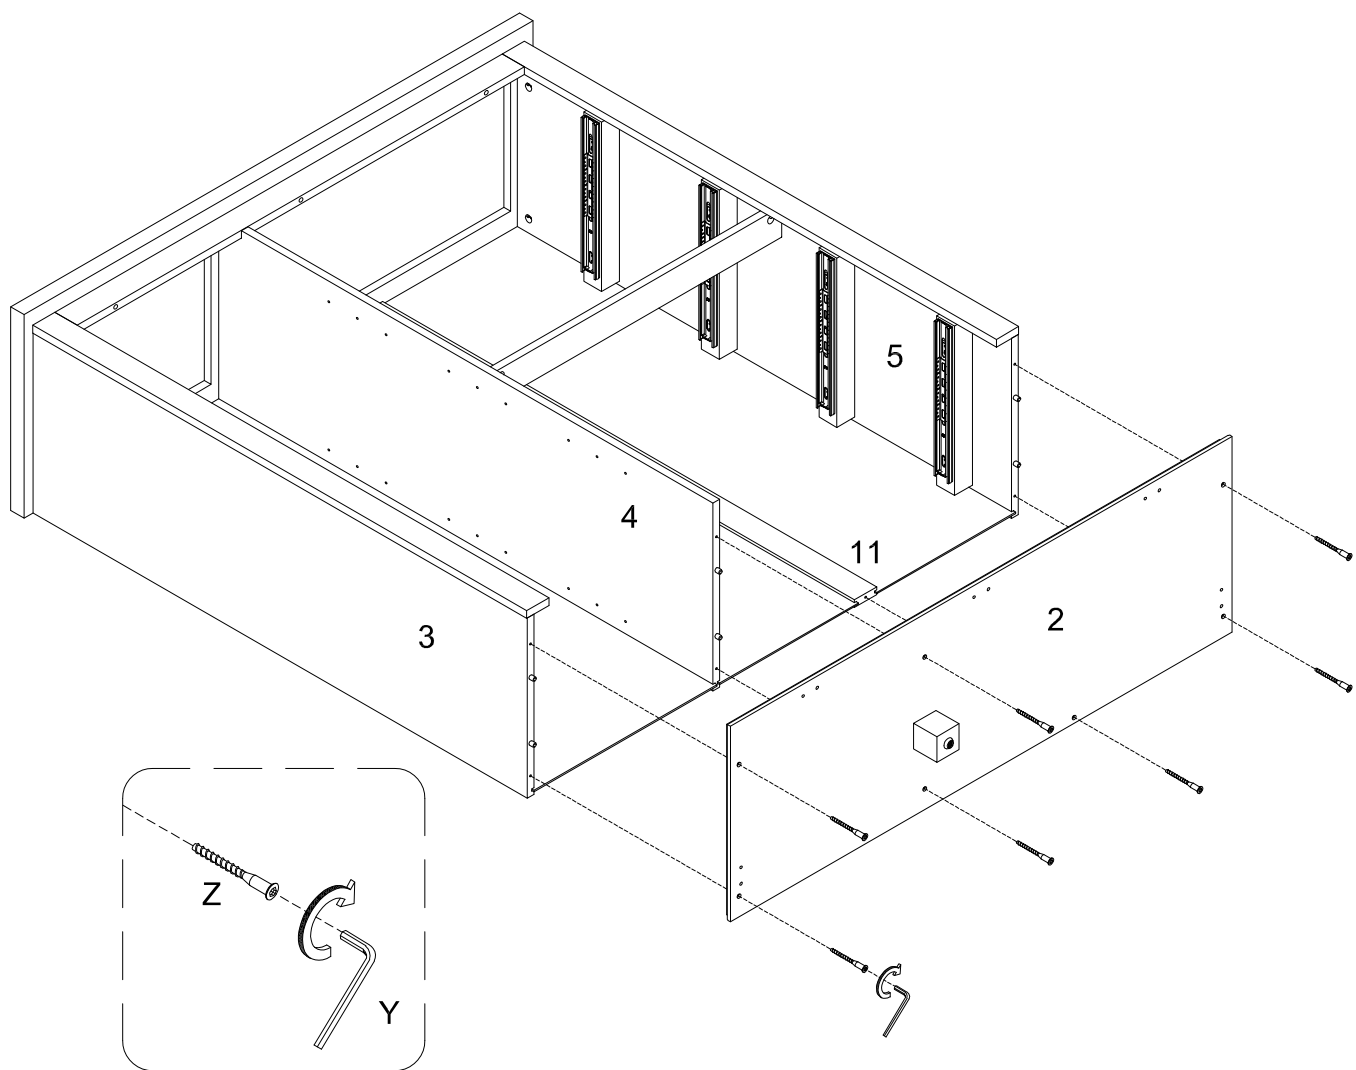


Using screw (Z) attach part (2) to parts (3,4,5,11) with Hex key (Y) as per diagram.

Step 16

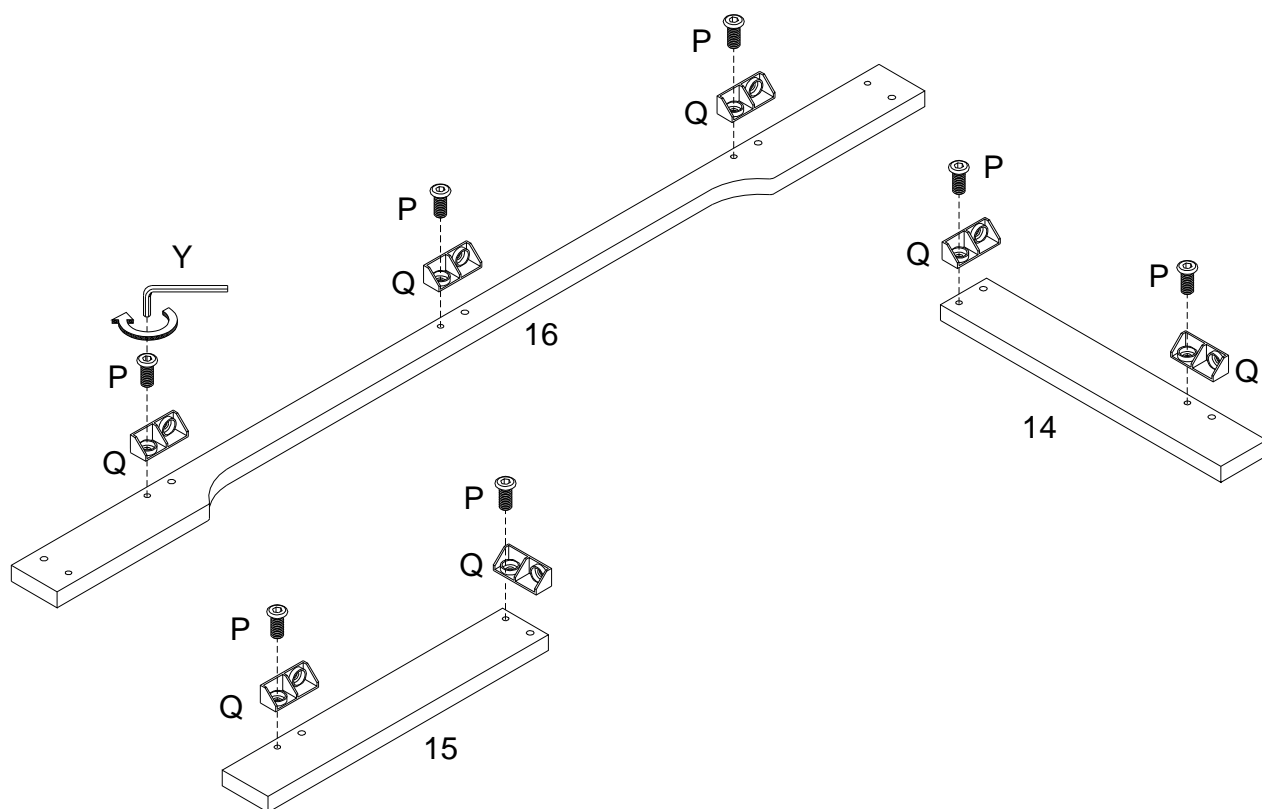


Secure bolt (P) attach plastic wedge (Q) into parts (14,15,16) with Hex key (Y) as per diagram.

Step 17

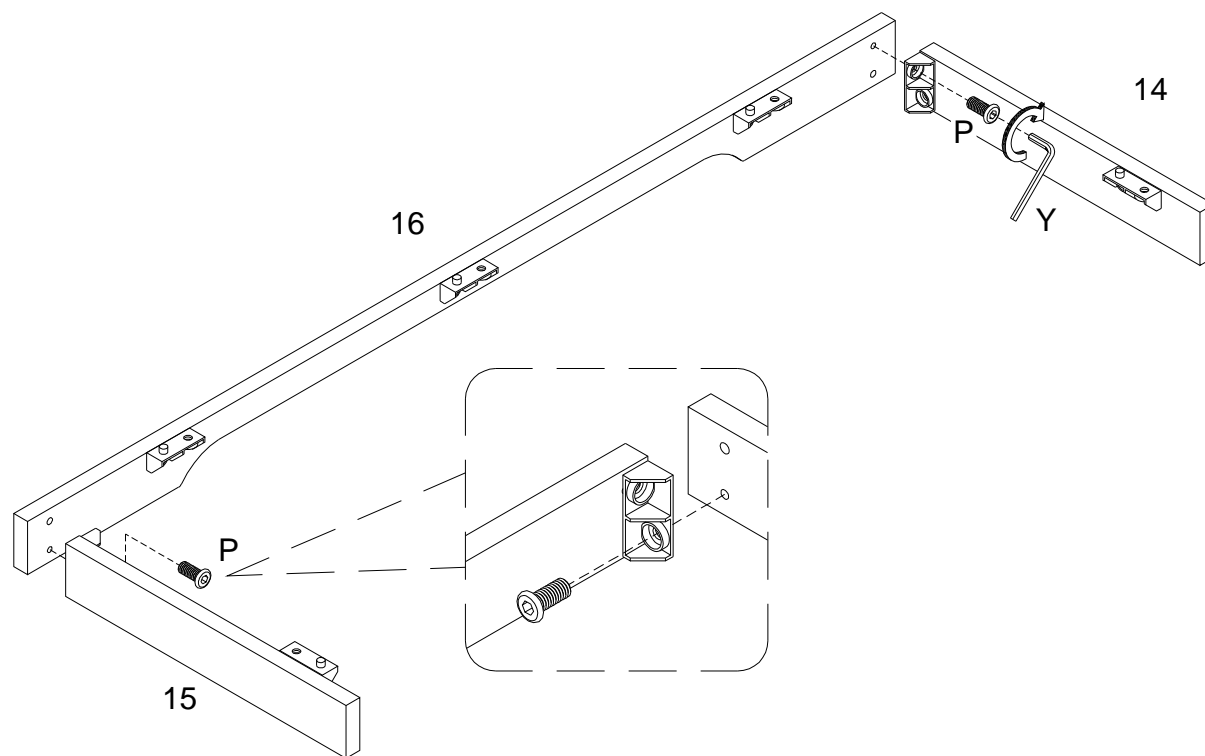




Using bolt (P) attach plastic wedge on parts (14,15) to part (16) with Hex Key (Y) as per diagram.

Step 18

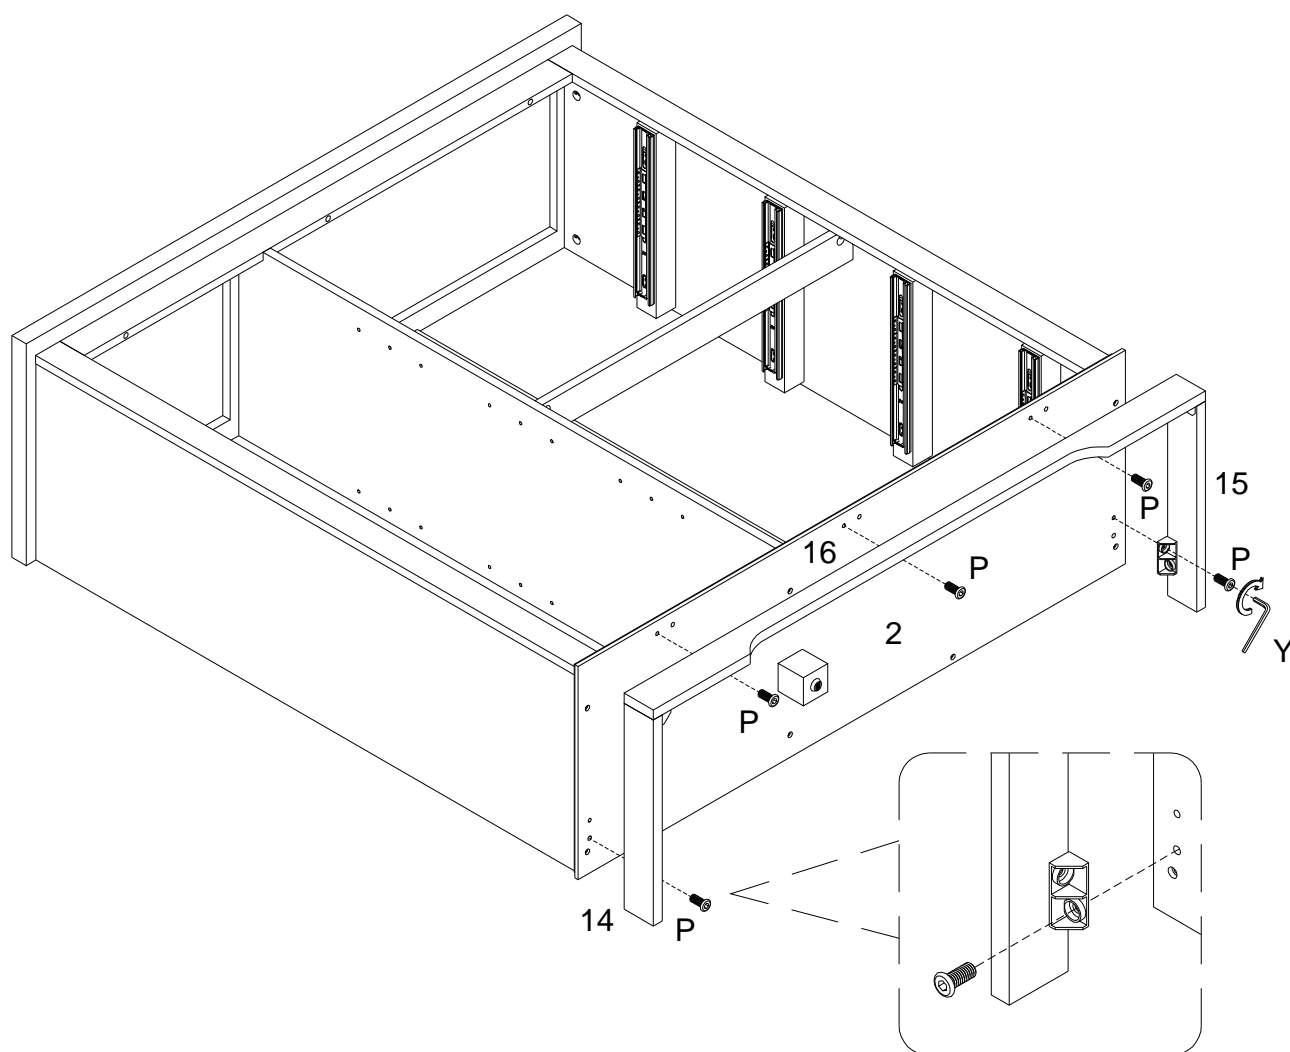


Using bolt (P) attach plastic wedge on parts (14,15,16) to part (2) with Hex key (Y) as per diagram.

Step 19

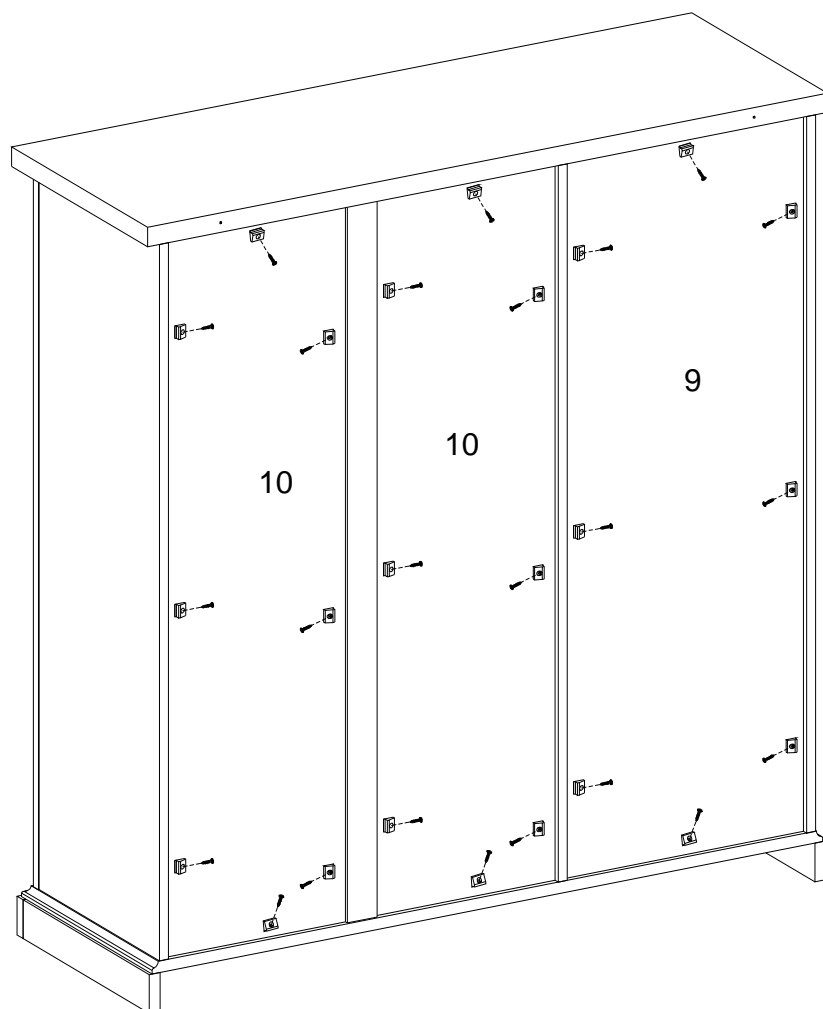


Using screw (H) secure plastic wedge (G) to parts (9,10) with Philips head screwdriver as per diagram.

Step 20

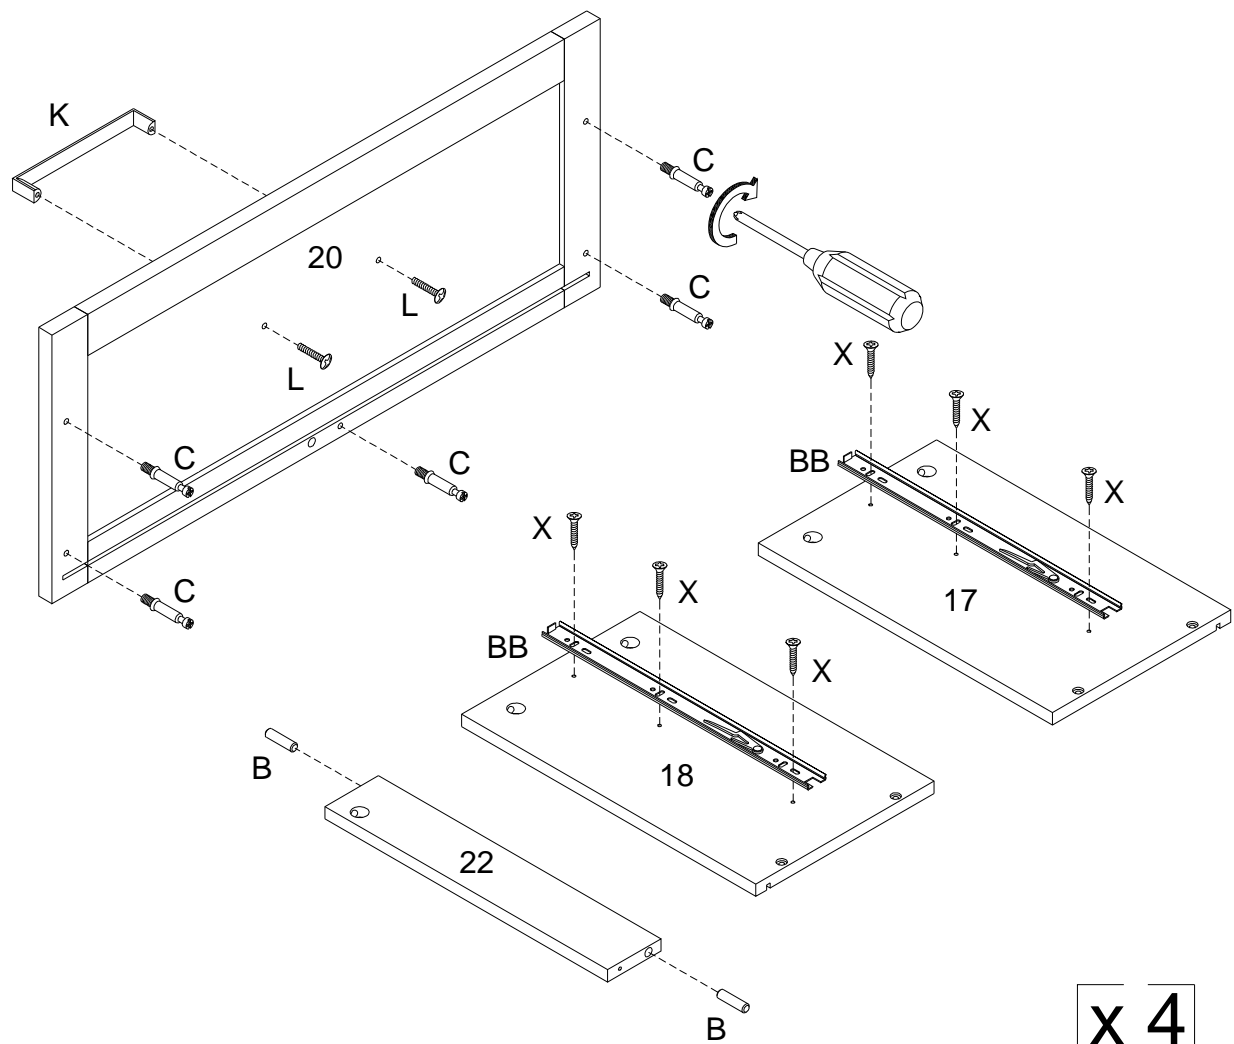

Insert wooden dowel (B) into part (22), then secure cam bolt (C) into parts (20) and using handle bolt (L) secure handle (K) to part (20) . Using screw (X) attach drawer slider (BB) to parts (17,18) with Philips head screwdriver as per diagram.



Step 21

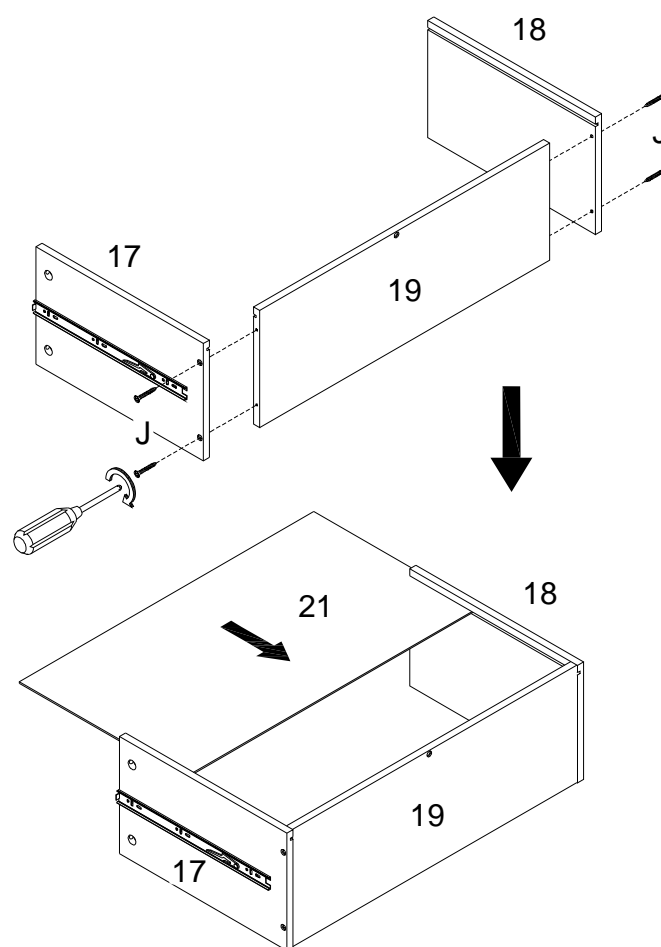

x 4

Using screw (J) attach parts (17,18) to part (19) with Philips head screwdriver, then put part (21) as per diagram.


Step 22

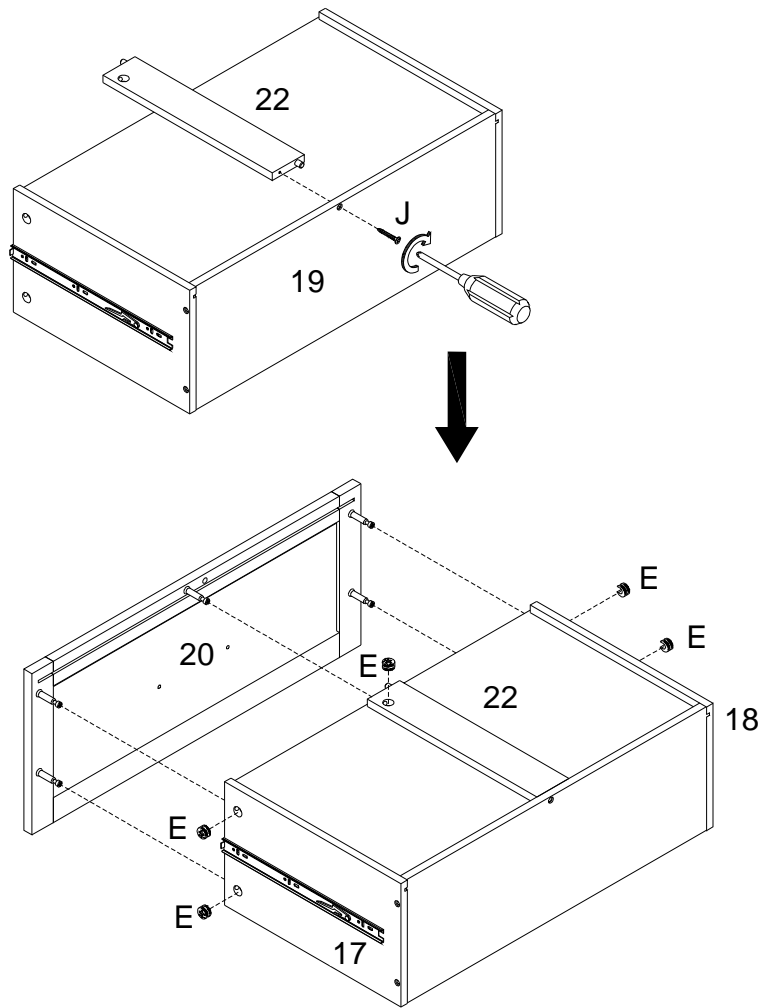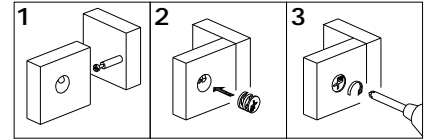

x 4



Attach part (22) into part (19), using screw (J) attach part (19) to part (22) with Philips head screwdriver, then using cam lock (E) secure part (20) to parts (17,18,22) with Philips head screwdriver as per diagram.

Step 23

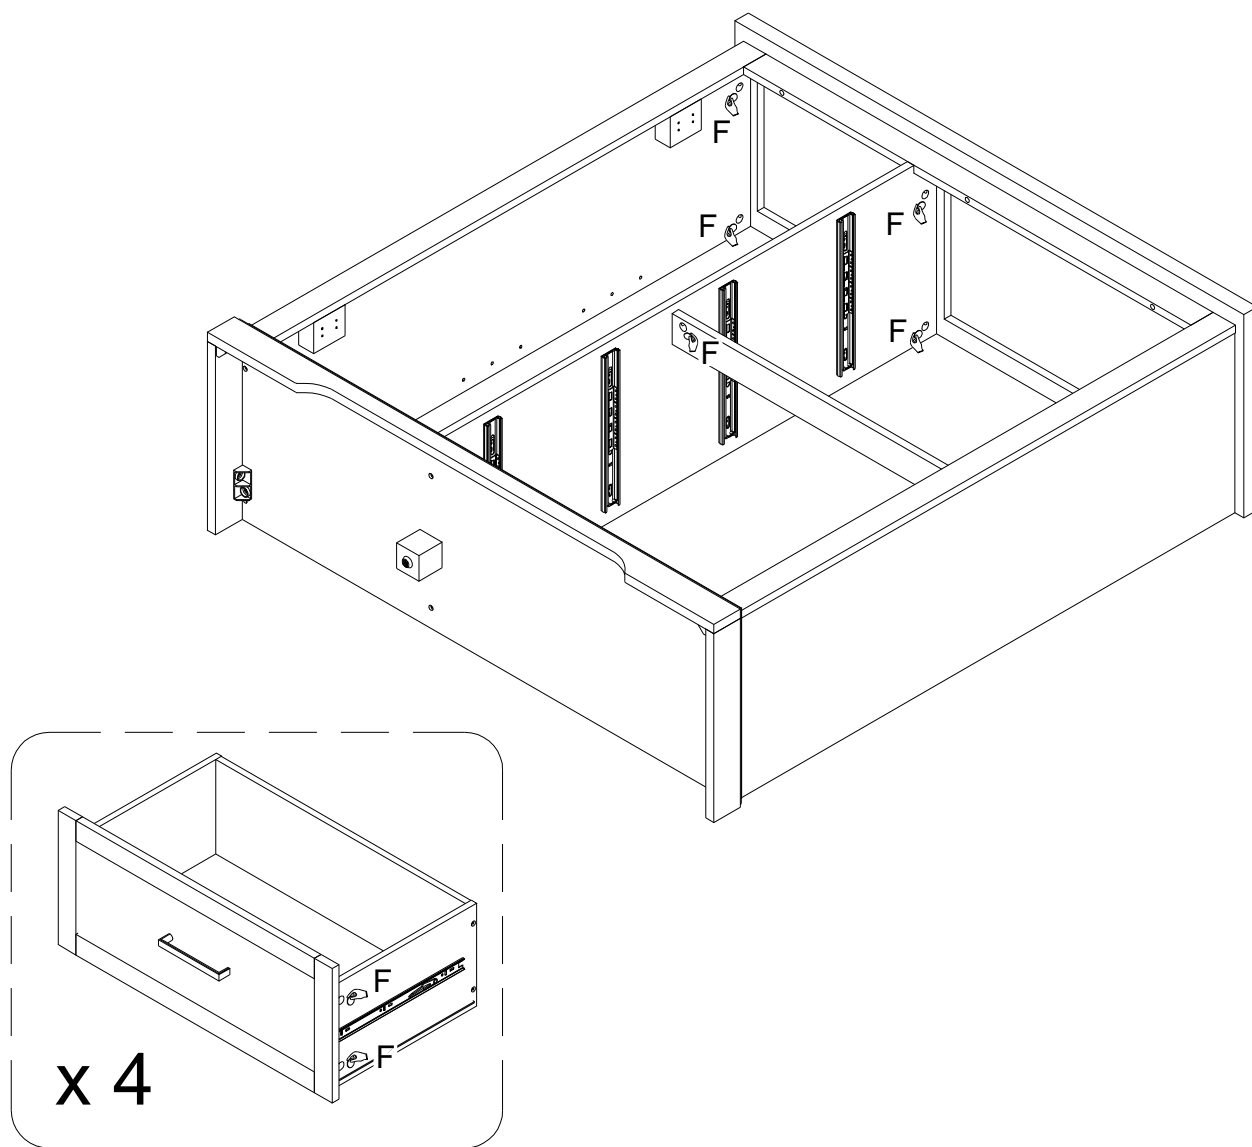




Place sticker (F) cover the holes as per diagram .

Step 24

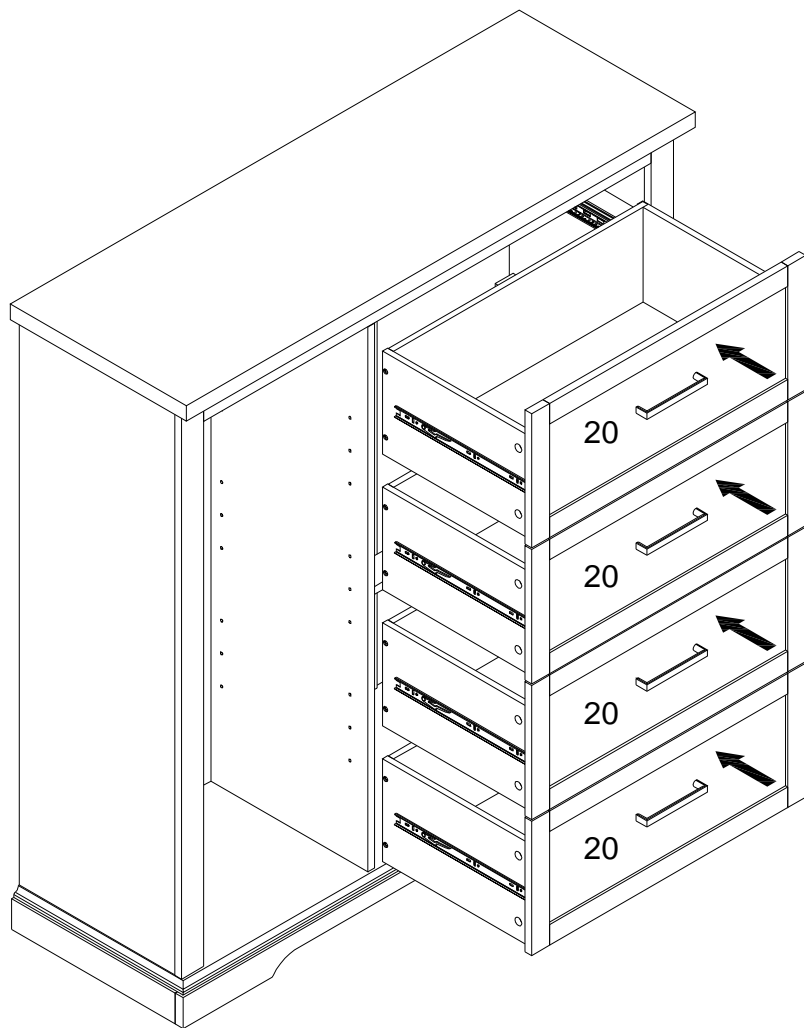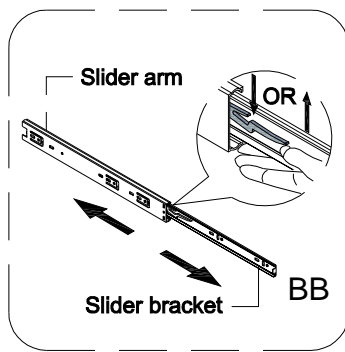


Insert the assembled drawers into the unit frame, extend the Ball Bearing Slide Tracks (BB) on the pedestal Side Panel all the way forward .Then align the Slide Runners on the assembled drawers with the Slide Tracks and push the drawer carefully inside until it stops. Note : if the drawer does not go in smoothly, please take it out and repeat the step. If you need to remove the drawer, please pull the drawer all the way out,press or lift the plastic release lever and pull out the drawer and then re-assembled the drawer until it was going in smoothly .

Step 25

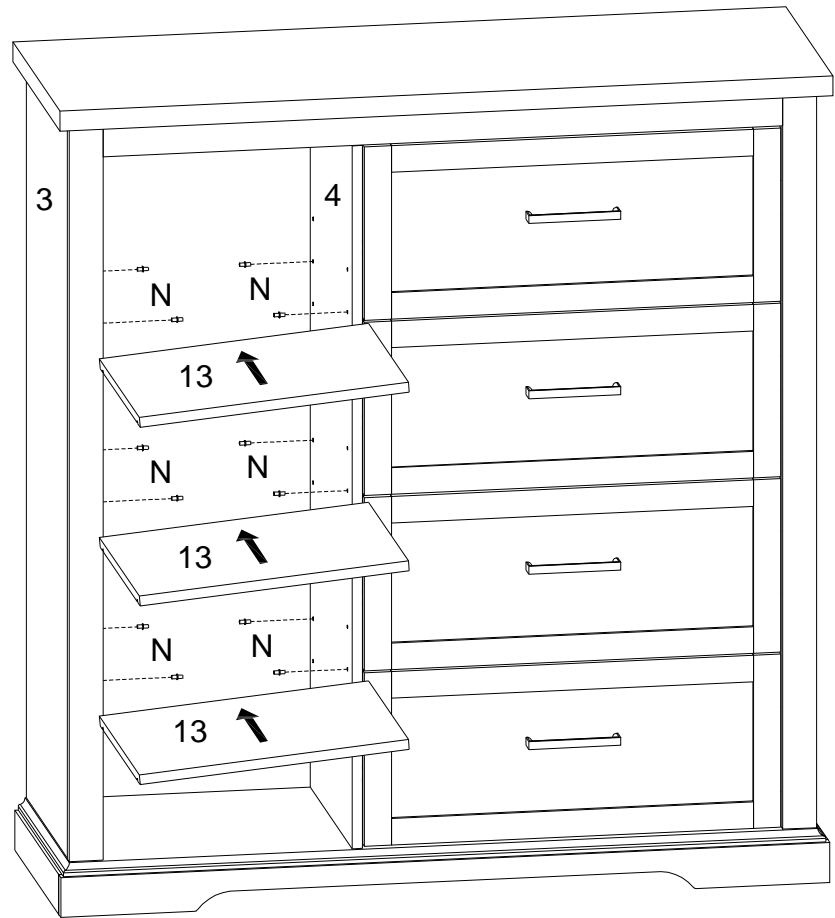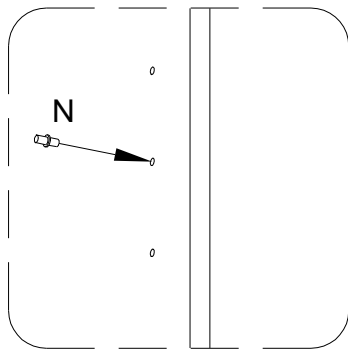


Insert shelf support pin (N) into parts (3,4) as per diagram. Make sure you place the shelf support pins (N) in the same level. So the shelf is not tilted. Put part (13) into unit as per diagram. Tilt and rest the adjustable shelf (13) onto the shelf support pins .

Step 26

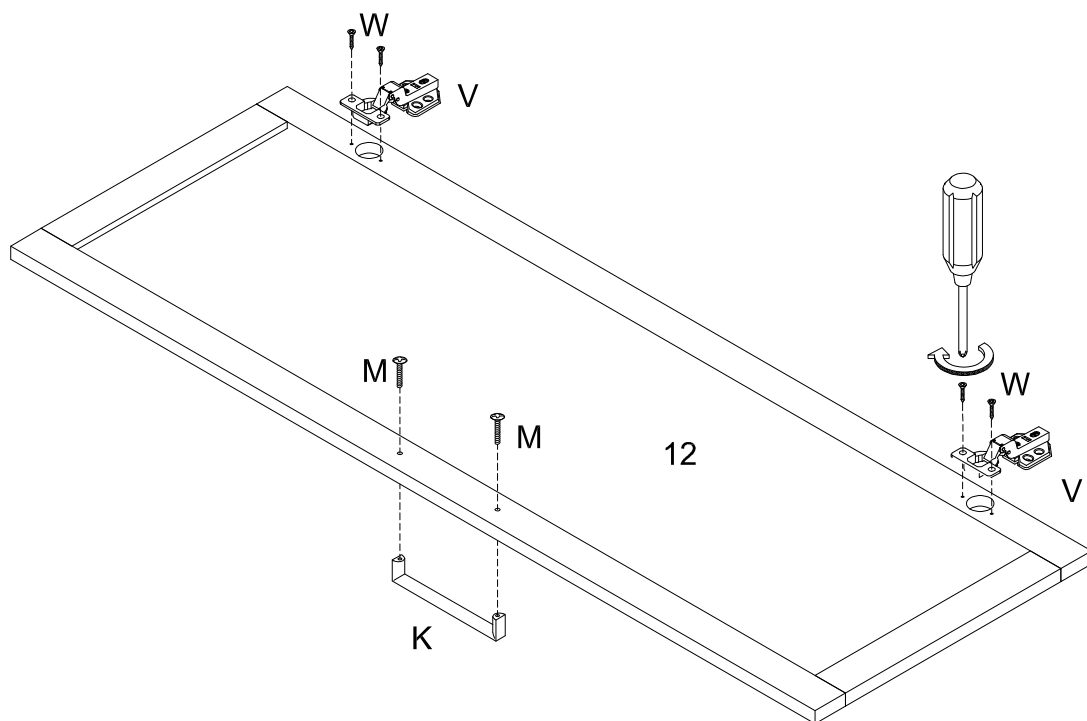


Using handle bolt (M) secure handle (K) to part (12) ,then using screw (W) attach Europe hinge (V) into part (12) with Philips head screwdriver as per diagram.

Step 27

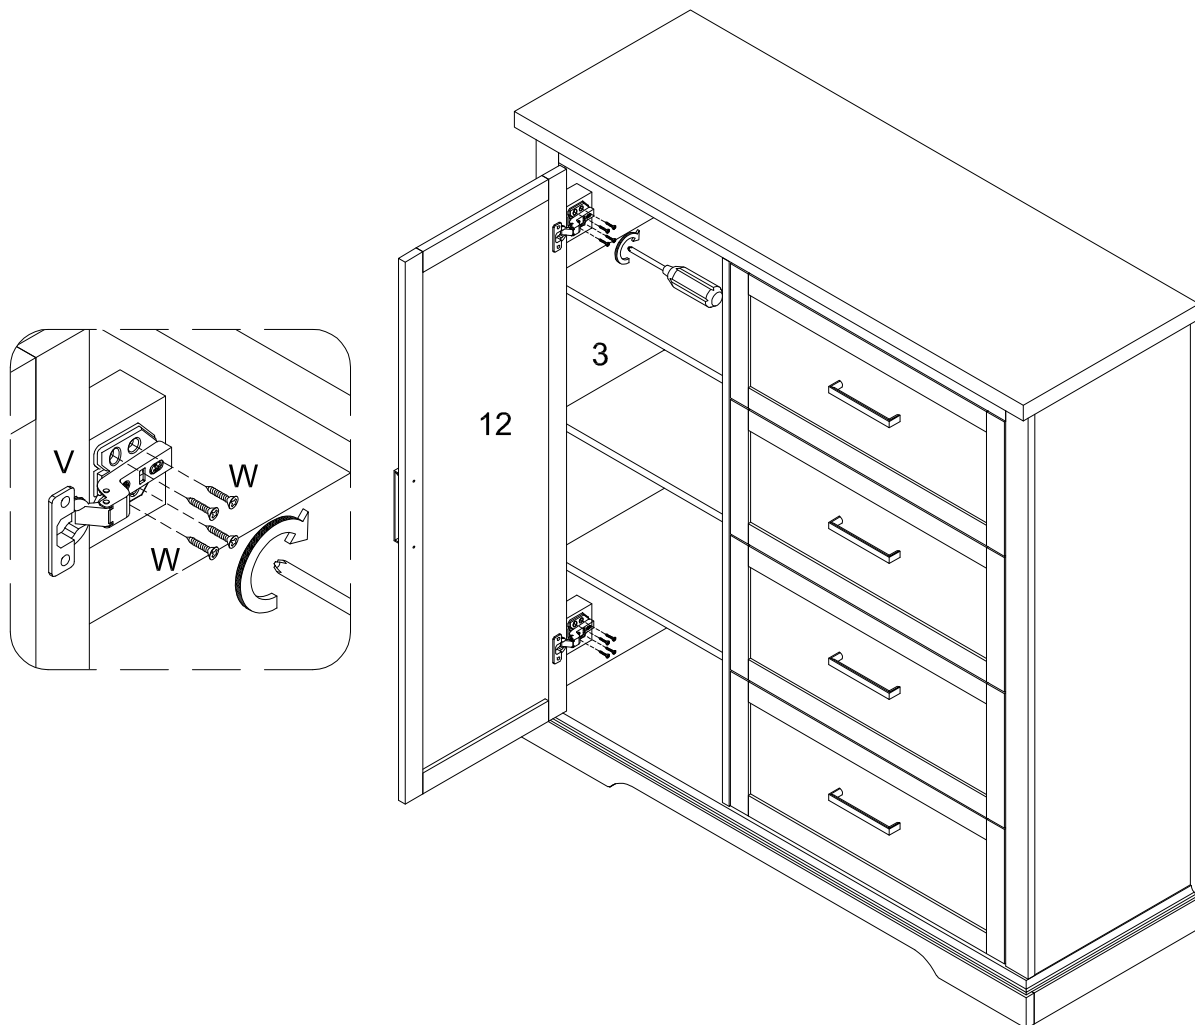


Using screw (W) attach Europe hinge (V) into part (3) with Philips head screwdriver as per diagram.

Step 28

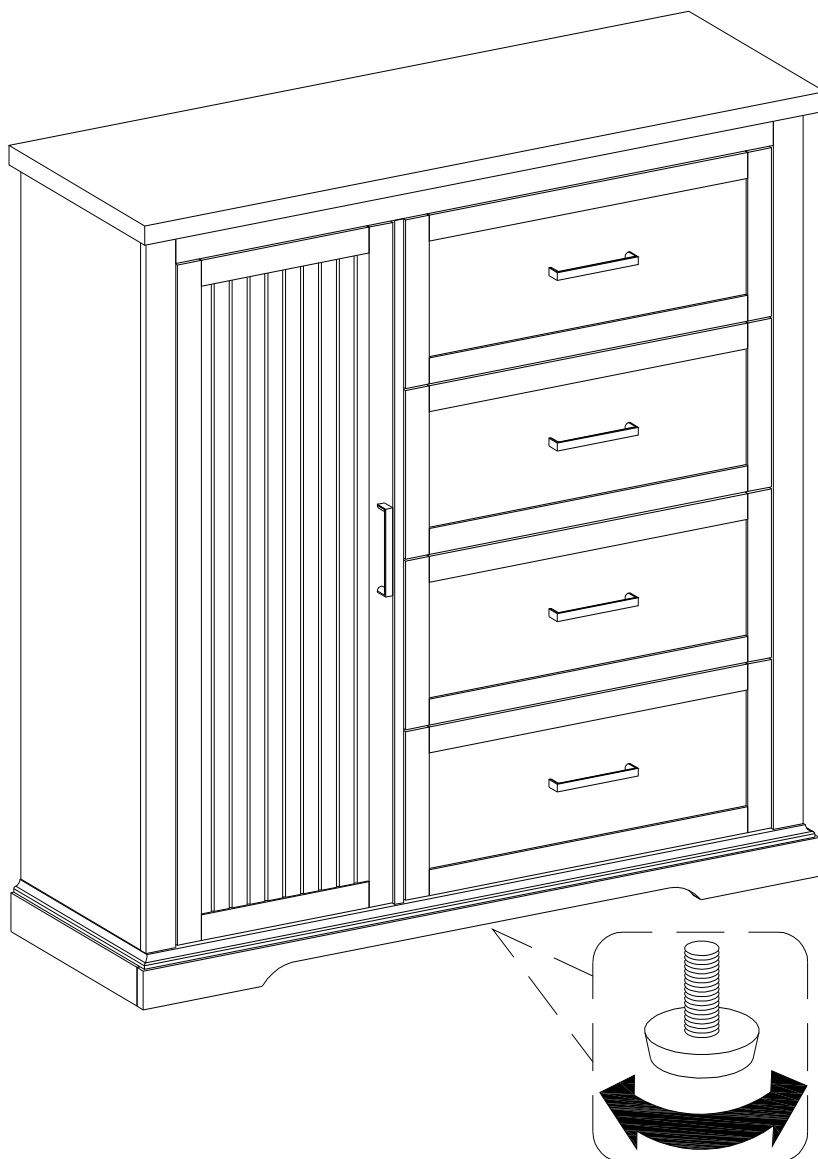

Position the assembled unit at the desired location ,if necessary adjust the floor leveler at the bottom of the support leg to level the unit .


Step 29

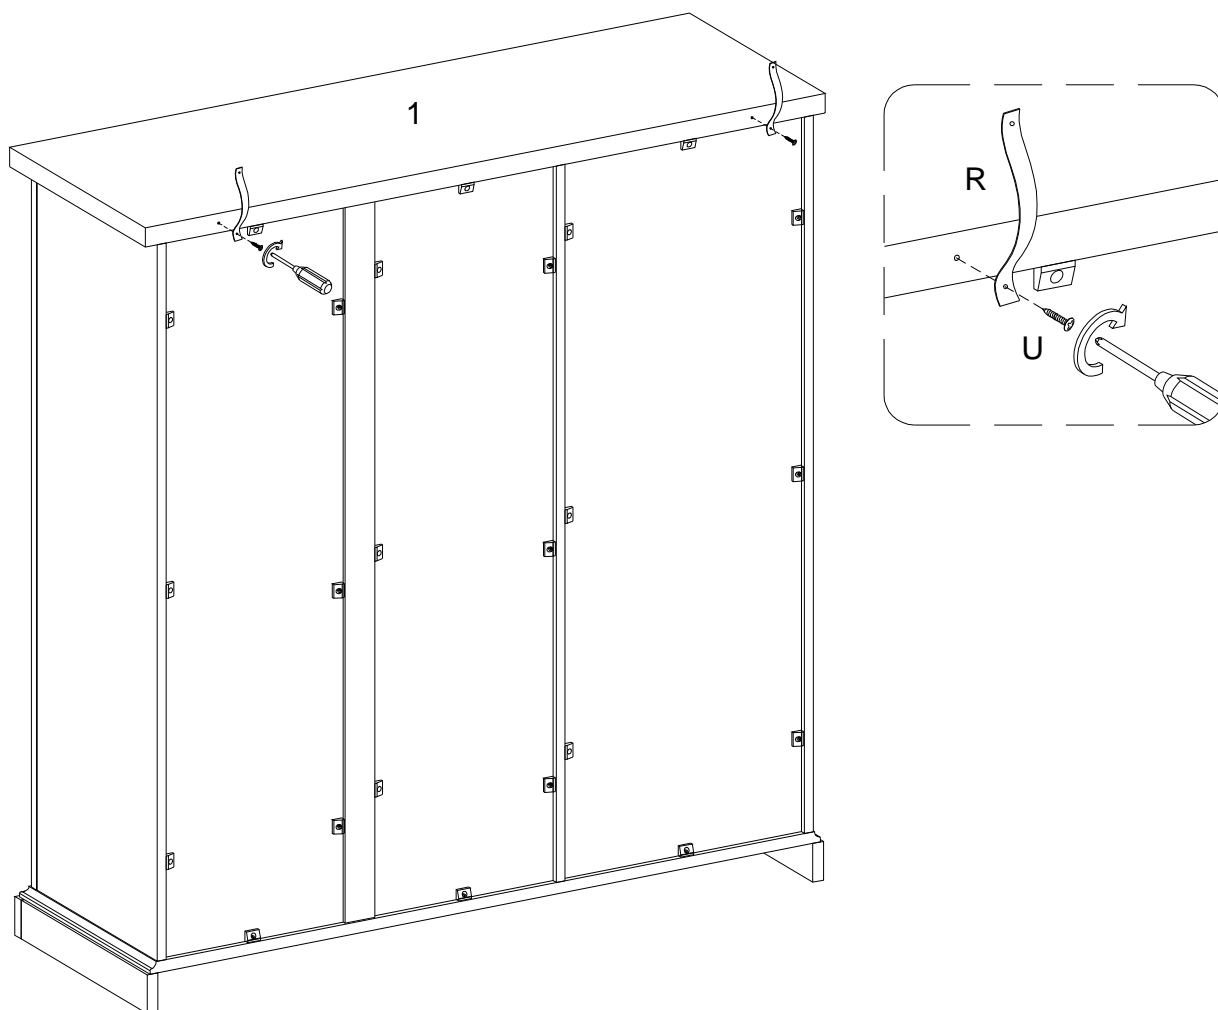

Using screw (U) attach Velcro strap (R) into part (1) with Philips head screwdriver as per diagram.


Step 30

WARNING

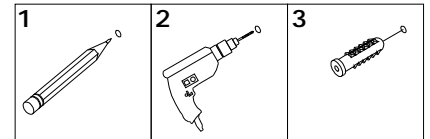


Serious or fatal injuries can occur from furniture tipping over. To prevent the furniture from tipping over we recommend that it is permanently fixed to the wall. Wall anchor and hardware are included with this product. Please make sure hardware is suitable for your walls before installing, as different wall materials may require different types of anchors.

Wall

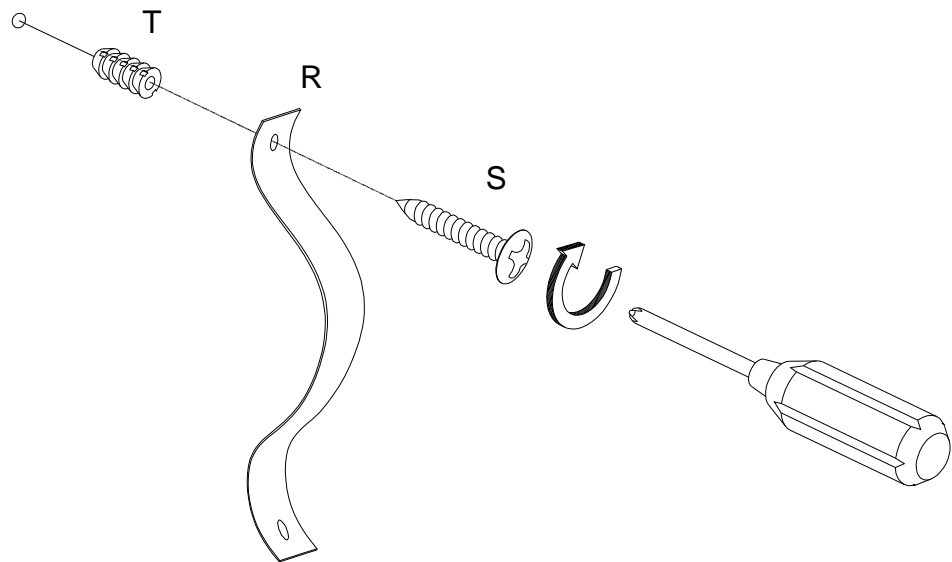

Using screw (S) attach Velcro strap (R) into Nut (T) to wall with Philips head screwdriver as per diagram.

Step 31

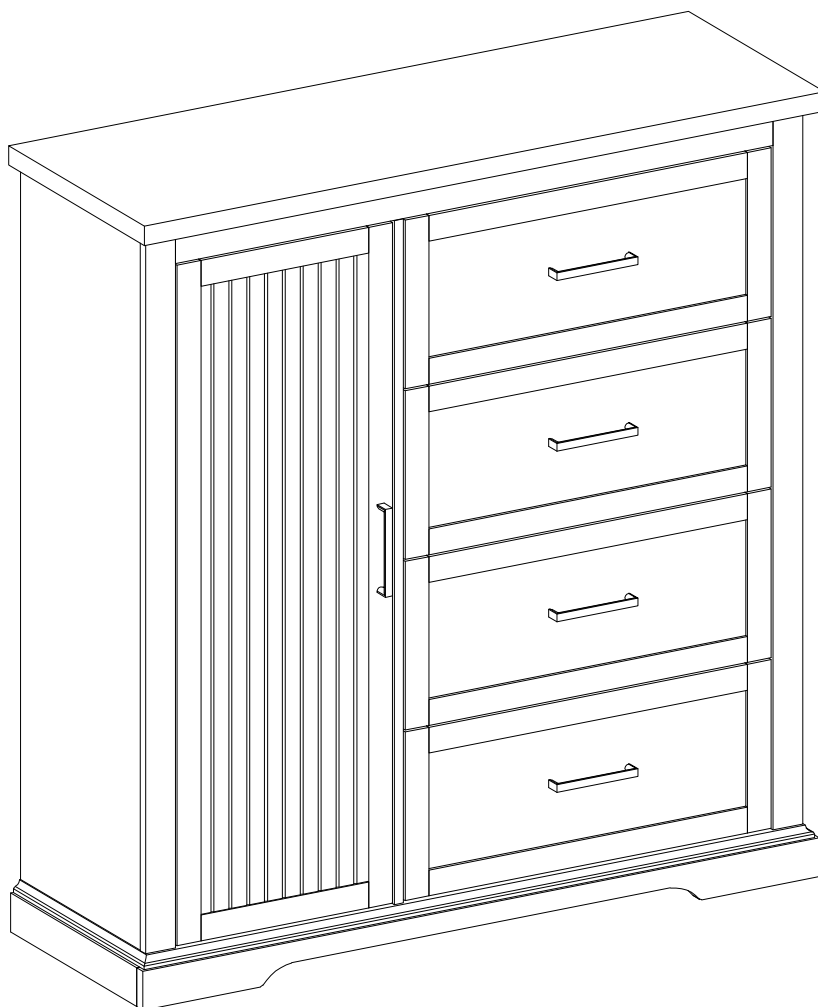

Final Assembly