

# USER'S MANUAL

MC600B

BLUETOOTH®-ENABLED | ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM

**BOSS**®  
AUDIO SYSTEMS

BOSS Audio Systems

3451 Lunar Court • Oxnard, CA 93030

[www.bossaudio.com](http://www.bossaudio.com) | 800.999.1236

tech support: [www.bossaudio.com/support](http://www.bossaudio.com/support)



1213

iPod® / iPhone® are trademarks of Apple, Inc. registered in the U.S. and other countries.  
BOSS Audio Systems is not affiliated with Apple, Inc.

# USER'S MANUAL

MC600B

BLUETOOTH®-ENABLED

ALL-TERRAIN SPEAKER AND  
AMPLIFIER SYSTEM



**BOSS**®  
AUDIO SYSTEMS

**MC600B BLUETOOTH-ENABLED  
ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM**

Congratulations on your purchase of a BOSS Audio Systems Off-road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, and will afford you years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



**Playing Music**

- 1) Press the “MFB” once to start playing music. The “MFB” during music playback serves as a “Play/Pause”
- 2) To skip songs or advance, press the “>>” button
- 3) To select the previous song, press the “<<” button

**Volume Control**

- 1) To raise the volume **Press and Hold** the “>>” button
- 2) To lower the volume **Press and Hold** the “<<” button

**MC600B BLUETOOTH-ENABLED  
ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM**

**Specifications**

Operation Voltage	-----	9 ~ 16 V
Max Power	-----	800W
THD	-----	< 1%
S/N	-----	>74 dB
Channel Separation	-----	>56 dB
Frequency Response	-----	250Hz - 20 KHz
Sensitivity	-----	150 mv - 1v

## BLUETOOTH® OPERATION

### Pairing & Connection

- 1) Power on the MC600B
  - a. **Press and Hold** the **MFB** for 3 sec.
- 2) The MC600B will automatically go into pairing mode. The blue and red LEDs will flash alternately
  - a. Go into the **Settings** menu on your device
  - b. Enter the **Bluetooth Menu**
  - c. "MC600B" will display under devices to pair.
  - d. If prompted to enter a pass code: **"0000"**
  - e. If the unit is not seen, repeat the above steps to refresh the **"Device List"**
- 3) If the connection is successful, you should now be paired and connected to the MC600B

### Reconnection

- 1) Power on the MC600B.
- 2) The unit will reconnect to the last paired device.
- 3) If you have paired with the MC600B, but it wasn't the last paired device...
  - a. Enter the **Bluetooth Menu** on your device
  - b. "MC600B" will display under **"Paired Devices"**
  - c. Choose the "MC600B" to reconnect.
- 4) If the user is out of range from the MC600B, it will disconnect automatically...
  - a. To reconnect once device is back in range, press the **"MFB"** button once.
  - b. The MC600B will reconnect to the device.

## MC600B BLUETOOTH-ENABLED ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM

### Contents


Amplifier .....	1 PC
High-Performance, Weatherproof Speakers .....	2 PCS
Amplifier Mounting Screws .....	4 PCS
Speaker Mounting Bolts .....	2 PCS
Rubber Mounting Shims .....	12 PCS
Fuse .....	1 PC
Bluetooth Control Box.....	1 PC
Power Cable .....	1 PC
Power and Speaker Cable Adaptor..... (12V Direct Plug)	1 PC
User's manual .....	1 PC
Warranty Card .....	1 PC

### Features:


- 3.5mm Audio Inputs
- Rust-Free Brackets
- Weatherproof Bluetooth Control Box
- High-Impact, High Temp Speaker Enclosures
- Weatherproof Speakers
- Bluetooth Audio Streaming

## MC600B BLUETOOTH-ENABLED ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM

### Connections

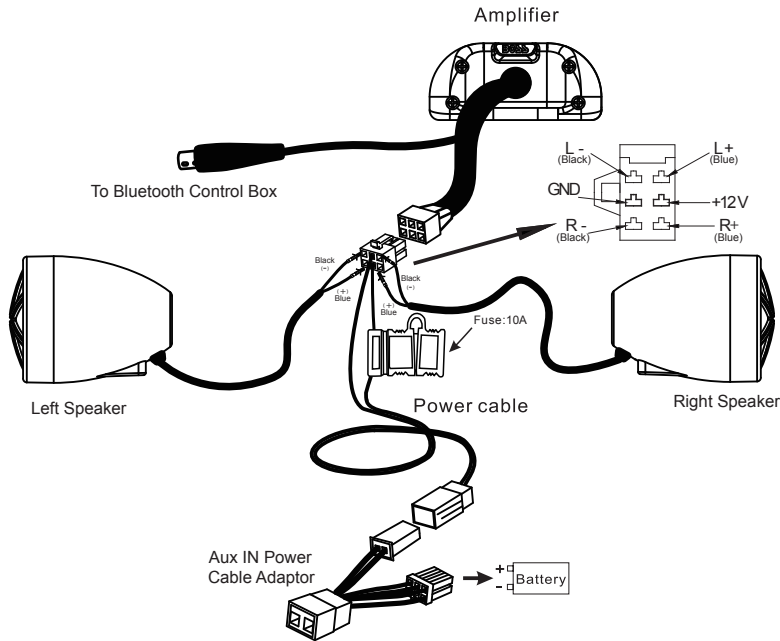

### Loudspeaker Mounting Diagram

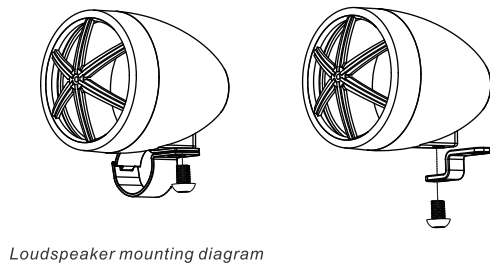

## MC600B BLUETOOTH-ENABLED ALL-TERRAIN SPEAKER AND AMPLIFIER SYSTEM

### Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

### Wiring

1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 10A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source (MP3 player, etc).
4. Use your player device and wired remote bluetooth control box to control your level of loudness.

### MC600B Multi-Function Controller

