

## OfficePower™ 1100AVR

Automatic Voltage Regulator



CyberPower gives you lightning protection plus battery back-up with an automatic voltage regulator.

Includes software that saves open files and shuts off the computer automatically when power is interrupted.

### PRODUCT FEATURES:

- Battery Run-times from 40 to 82 minutes
- Automatic Voltage Regulation Controls over-voltages, blackouts and brownouts
- USB & Serial Interface Compatibility
- Dual 7.2AH batteries for longer run-time
- All outlets are surge-protected at 1500 joules
- PowerPanel Plus™ Software included
- Internet/Broadband Network-Ready with Phone / Fax / Modem / Network Protection
- \$350,000 Connected Equipment Warranty

**AVR**  
AUTOMATIC VOLTAGE REGULATOR

**40 - 82**  
Minutes of  
system runtime

**USB & Serial**  
Interface Compatibility  
**ALL CABLES INCLUDED**



Includes  
**PowerPanel Plus™**  
Intelligent Power Management Software  
(Windows 98, ME, NT, 2000 & XP compatible)



- Saves open files, closes applications and shuts down your computer when a power outage occurs.
- Monitors input voltage, output voltage, battery capacity, load and unit temperature.
- Allows for user-defined scheduled shutdown and startup of computer system.


# OfficePower™ 1100AVR

## Automatic Voltage Regulator

### Reliable High Performance Power Protection with Automatic Voltage Regulation

CyberPower's OfficePower™ 1100AVR Battery Back-up System with Automatic Voltage Regulator increases low or decreases high voltages to a consistent and computer safe 110/120 volts. The OfficePower™ 1100AVR not only guards against surges and spikes, but will also provide battery back-up power if line voltage drops below 90 volts or exceeds 145 volts.

In the event of a power outage, PowerPanel Plus™ Software automatically logs and saves all open files then shuts down the computer system in an intelligent and orderly manner.

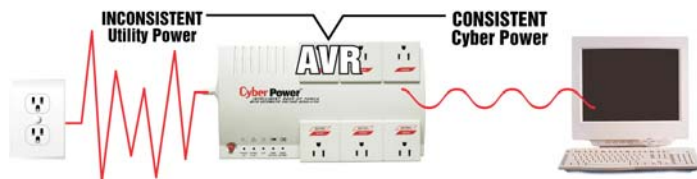

Automatic Voltage Regulators increase low or decrease high voltage to a consistent and computer-safe 110/120 volts. The CP1100AVR automatically provides battery backup power if the incoming line voltage drops below 90 volts or exceeds 145 volts.



- 1 - Battery Power / Surge Outlets
- 2 - Full-Time Surge Protection Outlets
- 3 - Power Switch
- 4 - Power On Indicator
- 5 - Wiring Fault Indicator
- 6 - Automatic Voltage Regulator
- 7 - Using Battery Indicator
- 8 - Check Battery Indicator
- 9 - Resettable Circuit Breaker
- 10 - Serial / USB Interface
- 11 - Phone / Fax / Modem / Network Communication Protection Ports

### TECHNICAL SPECIFICATIONS

Model	CPS1100AVR
VA Rating	1100VA
Watts	660W
Input Voltage on Utility	90V to 145V
Frequency on Utility	57Hz to 63Hz
Output Voltage on Battery	120V +/- 5%
Frequency on Battery	60Hz
Surge Energy Capacity	1500 Joules
Maximum Surge Current	36,000 Amps
Overload Protection	Internal circuitry limiting. On-line circuit breaker
Battery Run-time	40 to 82 minutes
Typical Battery Recharge Time	8 hours
Total number of receptacles	3 battery / surge, 3 full-time surge-only
Visual Indicators	Power On/Off, Automatic Voltage Regulator, Using Battery, Site Wiring Fault
Audible Indicators	Battery on, Low battery, UPS overload
Warranty	Three Year Limited Warranty on UPS unit and battery
Conformance Approvals	UL 1778, cUL, FCC Doc Class B
Included Software	PowerPanel Plus™ Power Management Software
Connected Equipment Guarantee	\$350,000

### ORDERING INFORMATION

Part Number	CPS1100AVR
Sell Unit Dims. (L" x W" x H")	14.5" x 9.25" x 8"
Sell Unit Net Weight	29 LBS.
Master Carton Quantity	2 UNITS
Master Dims. (L" x W" x H")	15.25" x 16.75" x 10"
Master Weight	58 LBS.
UPC Number	6 49532 20011 5

**CyberPower™**

5555 12th Avenue East, Suite 110, Shakopee, MN 55379  
Phone: 877.297.6937 Fax: 952.403.0009

For more information, visit CyberPower's Web Site at [www.cyberpowersystems.com](http://www.cyberpowersystems.com) or call 1-877-CY-POWER