
# TYPE 4X RAIN HOOD WITH REMOVABLE COVER

E69392
3,3R,44X&12

For use with type 4 & 4X enclosures. To protect devices and ventilation against wind blown dust, rain, splashing water, hose direct water and corrosion.


SAGINAW CONTROL & ENGINEERING
*Your Enclosure Source ®*



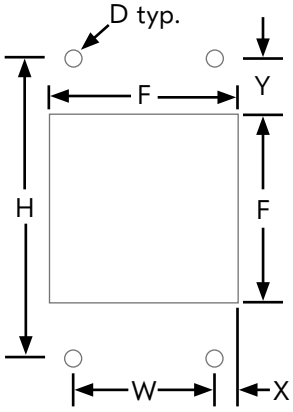


1. Fix mounting brackets using screws/washers/nuts provided.

2. Assemble the hood by pushing towards the panel and then firmly downwards.

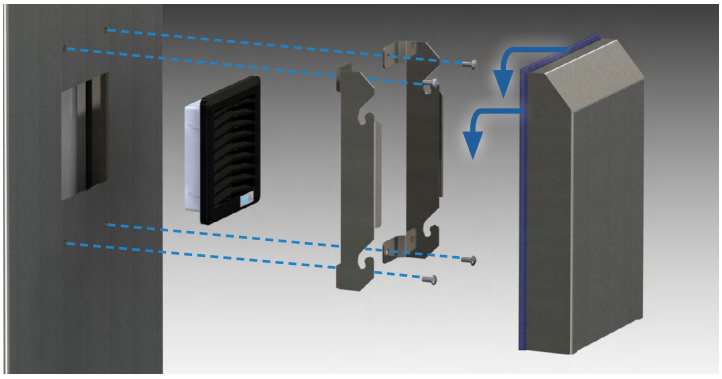

| Rain Hood Part Number | New Coinciding Fan & Filter | Coinciding Fan & Filter | D In/mm | W In/mm | X Inches | H In/mm | Y Inches | F Inches |
|---|---|---|---|---|---|---|---|---|
| SCE-RH3N4XSS | SCE-FEG33<br>SCE-FF33 | SCE-N12FA33<br>SCE-N12FGA33 | 0.22<br>[5.5] | 3.15<br>[80] | .245 | 6.46<br>[164] | 1.355 | 3.75 |
| SCE-RH4N4XSS | SCE-FEG44<br>SCE-FF44 | SCE-N12FA44<br>SCE-N12FGA44 | 0.22<br>[5.5] | 4.41<br>[112] | .310 | 7.72<br>[196] | 1.343 | 5.03 |
| SCE-RH6N4XSS | SCE-FEG66<br>SCE-FF66 | SCE-N12FA66<br>SCE-N12FGA66 | 0.26<br>[6.5] | 8.6<br>[218.5] | .154 | 11.69<br>[297] | 1.391 | 8.91 |
| SCE-RH10N4XSS | SCE-FEG1010<br>SCE-FF1010 | SCE-N12FA1010<br>SCE-N12FGA1010 | 0.26<br>[6.5] | 11.28<br>[286.5] | .145 | 14.57<br>[370] | 1.498 | 11.57 |