

24' LED STRING LIGHT SET

Model: S8020




INSTALLATION AND SAFETY INSTRUCTIONS

IMPORTANT: Read before installing fixture. Retain for future reference.

PACKAGE CONTENTS:

- 24 ft. heavy duty string light with 12 sockets.
- 12 LED Bulbs (1-Watt LED S14 E26 included) (S8021 – Replacement bulbs sold separately).

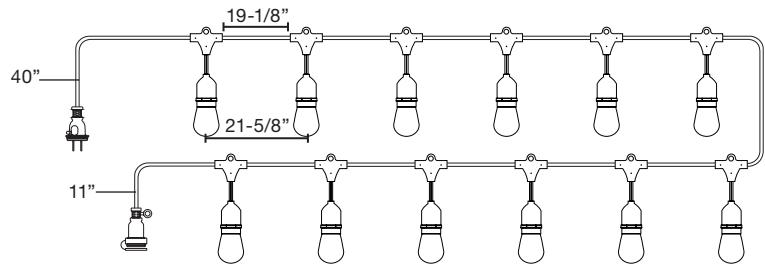

WARNING – SAFETY INFORMATION:

- NEVER use with an extension cord unless the plug can be fully inserted. DO NOT alter the plug.
- To reduce the risk of electric shock, DO NOT use the product if power cord is frayed or broken.
- Always unplug this product before replacing bulbs.
- This string light is rated 12W; do not overload. Connect end-to-end a total of 360 Watts (30 24' strings) maximum of light strings or decorative lighting of the same type.
- Risk of Fire: DO NOT use bulbs having a wattage greater than the maximum value stated on the product.
- If replacing bulbs, please contact Satco customer service at Satco.com/support.
- For indoor and outdoor use.
- To reduce the likelihood of excessive heat and possible damage, use only decorative LED lamps packaged with this product.
- Always unplug this product before installing or replacing fused and/or lamps.
- This is an electric product – not a toy! To avoid risk of fire, burns, personal injury and electric shock, it should not be played with or placed where small children can reach it.

INSTALLATION:

NOTE: DO NOT DRAPE CORD. KEEP AWAY FROM CHILDREN.

Before beginning installation of product, make sure all parts are present. If any part is missing or damaged, do not attempt to install the product. No tools are required for installation.

1. Carefully unpack string lights from box.
2. Straighten string lights, eliminating any kinks before using.
3. Each string light is designed with a universal keyhole for mounting with lights hanging downward. Hardware options (not included) screws, nails, zip ties, hooks and more.
4. Before plugging power cord of lights into a wall outlet, make sure each light bulb is securely fastened. **To ensure the lamp, socket, and rubber gasket make a water tight seal, screw the lamp in secure enough for all components to make contact.**


If a bulb does not light when energized, apply another 1/2 turn until it does.

DANGER: If using this light in a WET or DAMP location, connect this product to a Ground Fault Circuit interrupting (GFCI) outlet to reduce the risk of personal injury, electrical shock or death. If one is not provided, contact a qualified electrician for proper installation.


INSTALLING MULTIPLE STRING LIGHT SETS:

NOTE: Always unplug string light from outlet before connecting additional string lights.


Extend the length of your lights by connecting more than one strand together to form one continuous string up to 720 feet (30 sets)! Simply follow the above installation steps making sure each connection between strands is secured and the end female receptacle is securely covered using the receptacle cover when done.




Connection Jack



Female



Male



Female

Male

After Connecting

CARE AND MAINTENANCE: Clean only with a dry, soft cloth. Do NOT use abrasive cleaners.

Problem: Light does not come on initially or no longer comes on.

Possible Causes: Bulb is burned out. Power is OFF. Lamp is not plugged in.

Corrective Actions: Replace bulb. Make sure power supply in ON. Plug lamp into outlet.



Satco Products, Inc.
Brentwood, NY 11717