

SAFETY INFORMATION

Released Date: 2025-10-09

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.
- Use ONLY LED bulbs in this fixture. Incandescent and halogen lamps may cause severe thermal damage.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

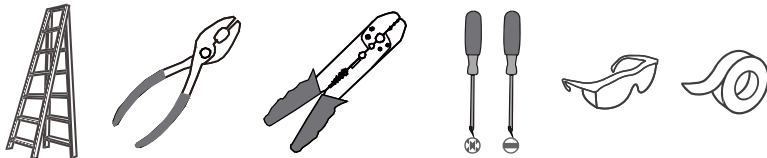


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

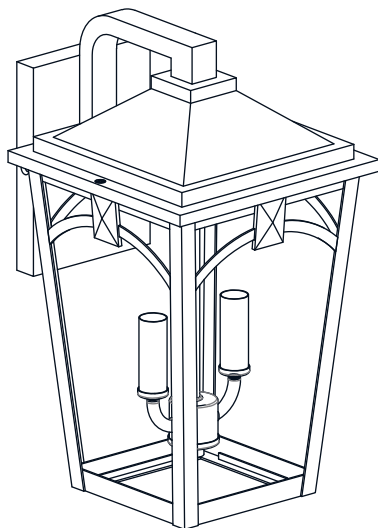

A Fixture Body
x 1

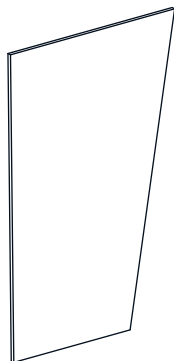


B Glass Panel
x 4



C Optional
Candle Cover
x 2


MOUNTING HARDWARE



AA Inner Backplate
x 1



BB Mounting Screw
x 2




CC Wire Connector
x 3



DD Outlet Box Screw
x 2


1

Remove Cage From Fixture Body

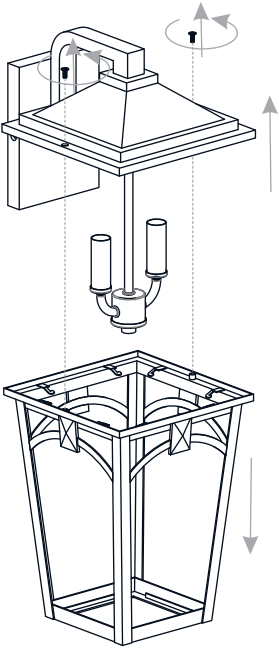


2

Install Glass Panel

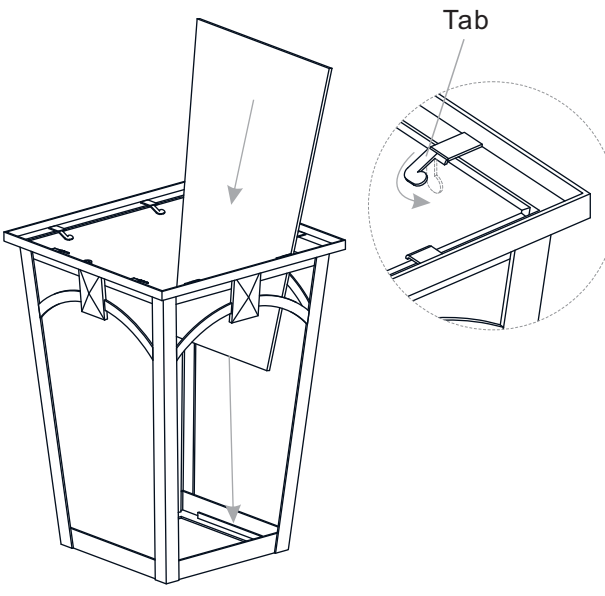


3

Install Cage

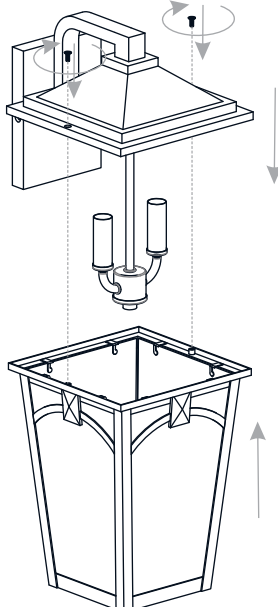


4

Install Inner Backplate

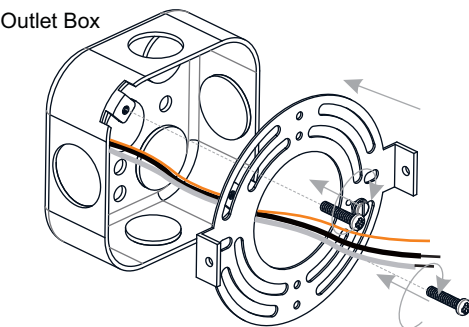

5

Wiring

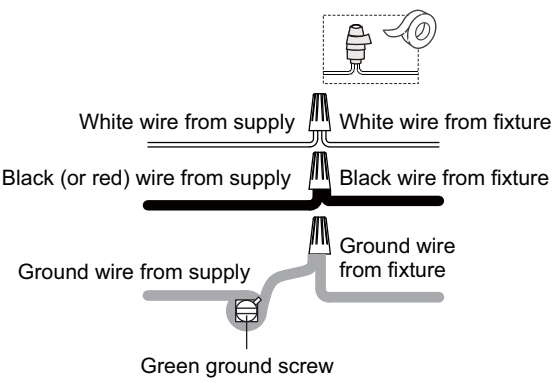

White wire from supply White wire from fixture


Black (or red) wire from supply Black wire from fixture

Ground wire from supply Ground wire from fixture

Green ground screw

6

Install Fixture Body

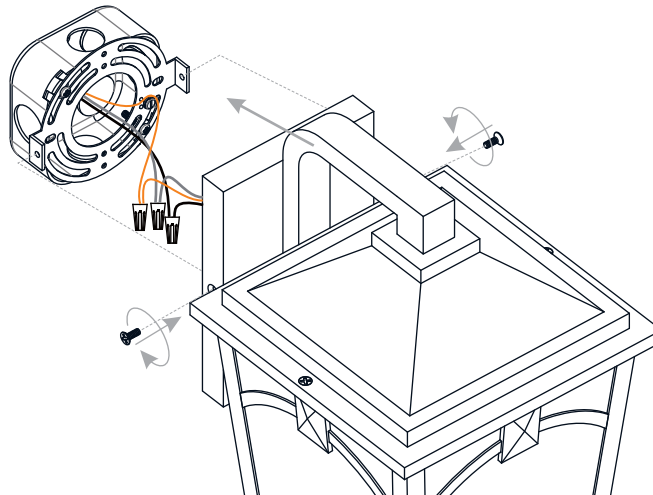

7

Install Bulbs

Install two correct bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb Type (not included):



BULB BASE TYPE
Candelabra (E12)




15W

BULB SHAPE
TYPE B
LED ONLY



Optional Candle Cover


* Remove Candle Covers on the sockets, replace them with Optional Candle Covers if you want.

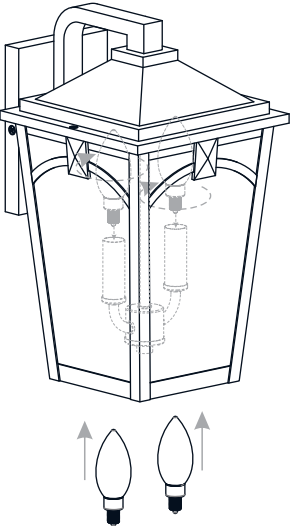

8

Apply Caulking

* Note: Do NOT caulk the bottom of the backplate to allow moisture to escape.

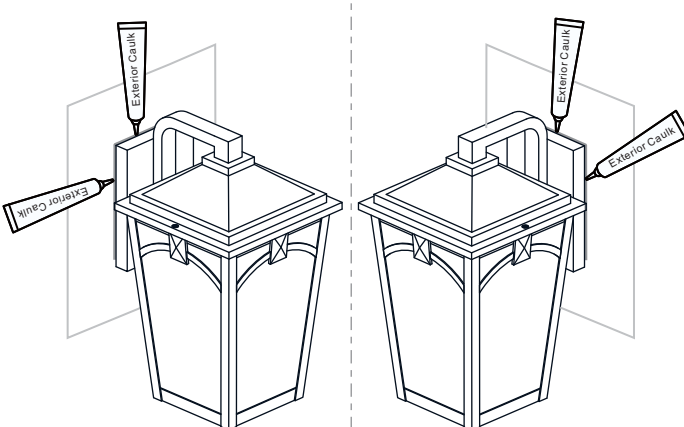

Your installation is now complete! Restore electricity and save this sheet for future reference.

- 3 of 3 -