


INSTALLATION INSTRUCTIONS


WARNING IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.
- Supply conductors (Power Wires) Connecting the fixture must be rated minimum 90°C. If uncertain, consult an electrician.

TOOLS REQUIRED

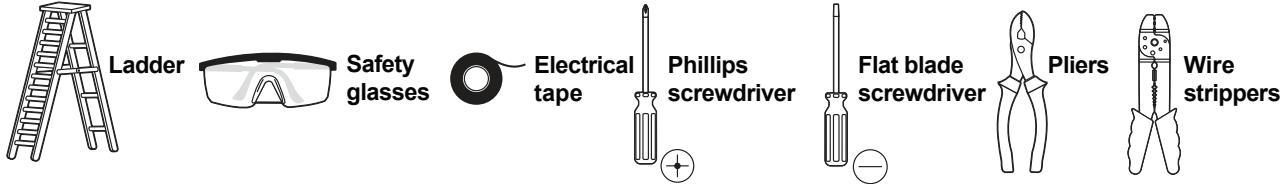

INCLUDED ACCESSORIES BAG

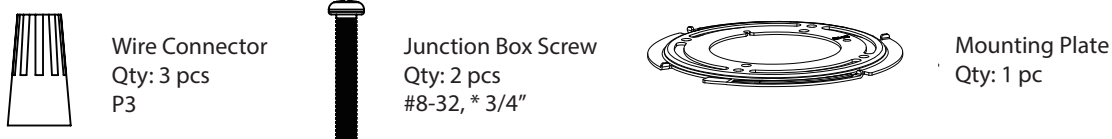

INSTALLATION

Uses 3" junction box, 4" junction box or a combination 3/0-4/0 electrical box.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Attach mounting plate to outlet box (not included) using the outlet box screws provided.
4. Pull the power supply wires out from outlet box . Connect incoming ground wire to mounting plate ground wire (green). Connect incoming common wire to fixture common (white). Connect incoming hot wire to fixture black wire. Wrap all wire connections with electrical tape for a more secure connection.
5. Select desired LED color temperature by using the switch of luminaire situated on canopy.
6. Raise the fixture body and align the tab to the clamping position of the mounting plate. Push upward and rotate to install until tightening.

VERIFIED LIST OF TESTED DIMMERS

Brand	Model No.
LUTRON	DVCL-153P-AL
	DVCL-253P-WH
	AYCL-253P-LA
	PD-6WCL-WH-R
Leviton	IPL06-10Z
	IPE04-1LZ


MAINTENANCE

- Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
- This product is suitable for damp locations.

IMPORTANT!

If the control is not paired properly to LED fixtures, irreparable damage may occur.

3 inch/4 inch junction box

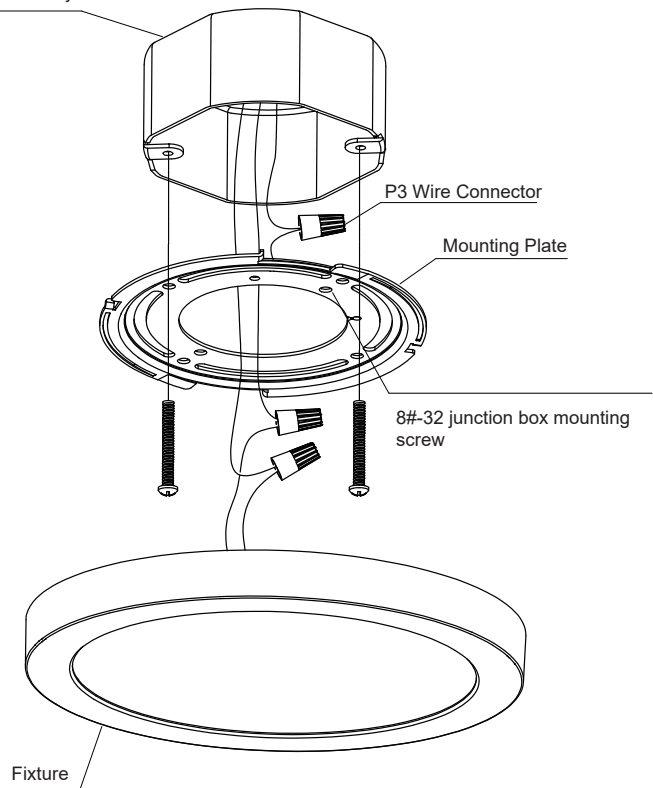

FCC INFORMATION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.