


GE Smart Outdoor Light Strip - Works with Savant (LIG-RP32EDWS1) Quick Reference Guide


Specifications

Environmental				
Temperature	-4°F to 104°F (-20°C to 40°C)			
Humidity	RH < 80% 32°C			
IP Rating	IP65			
Dimensions and Weight				
Device	Length	Width	Height	Weight
	32ft (9.75m)	0.47in (12mm)	0.86in (22mm)	8.49lbs (3850g)
Electrical				
Start Time	<1.5s			
Power	36W			
Power Factor	>0.5			
Input Voltage	120V			
Output Voltage	24V			
Output Current	1.5A			
Color Mixing	RGBWW			
CCT Range	2000K - 7000K			
Color Range	16 million colors			
Networking				
Wireless	Wi-Fi (2.4 GHz) and BLE			
Mobile Compatibility	Works with iOS 13 and above and Android 9 and above			
Out-of-Home Control	OTA			
Regulatory and Warranty				
Safety and Emissions	UL153 and cUL153, UL1310 and cUL1310 (adapter)			
				
Warranty	2 Years			

Box Contents

- (1) 32ft Outdoor Light Strip
- (1) Glue
- (1) Cap
- (30) Snap Joints
- (30) Screws
- (1) Product Information Regulatory Statement

Device Overview

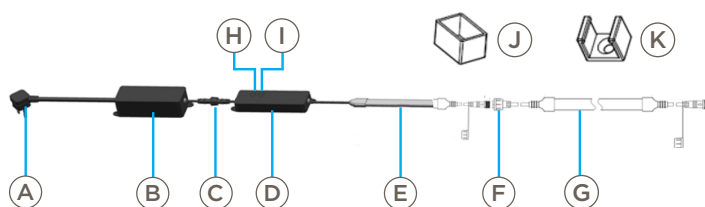

- (A) Outlet
- (B) Adapter
- (C) Waterproof Connector
- (D) Control box
- (E) Light Strip
- (F) Waterproof Connector
- (G) Light Strip Extension - Sold separately.
- (H) On/Off Button - Press and hold for 10 seconds to factory reset the device.
- (I) Light Show Modes - Cycles through the 9 preset Lights Shows. (Candlelight, Rainbow, Fireworks, Volcanic, Aurora, Happy Holidays, Red, White & Blue, Vegas, Party Time)
- (J) Cap
- (K) Snap Joint - Can be used to snap the light strip in place.