


INSTALLATION INSTRUCTIONS

WARNING NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.
- Supply conductors(Power Wires) Connecting the fixture must be rated minimum 90 °C. If uncertain, consult an electrician.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers


INCLUDED ACCESSORIES BAG



Wire Connector
Qty: 3 pcs
P3



Junction Box Screw
Qty: 2 pcs
#8-32, * 3/4"

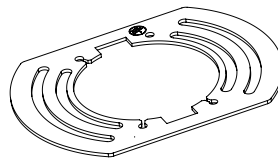

Mounting Plate
Qty: 1 pc

INSTALLATION

Uses 3" junction box, 4" junction box or a combination 3/0-4/0 electrical box.

1. Install the provided mounting plate to the junction box using the junction box screws provided.
 2. Attach support cable to the slotted holes on mounting plate, and carefully allow support cable to support the weight of the fixture while wiring. Provide electrical service according to the "National Electrical Code" or your local electrical code to the outlet box. Connect supply wires to fixture wires and insulate with proper wire nuts.
 3. Connect incoming ground wire to mounting plate ground wire (green). Connect incoming common wire to fixture common (white).
Connect incoming hot wire to fixture black wire.
 4. Raise the fixture to the junction box, guide the spring clips into the slots in the mounting plate and press the front of the fixture firmly at the clip locations to lock the fixture in place.
- Note:** To ensure an easier installation, press one side of the fixture in first until you hear a click, then repeat with the other side.

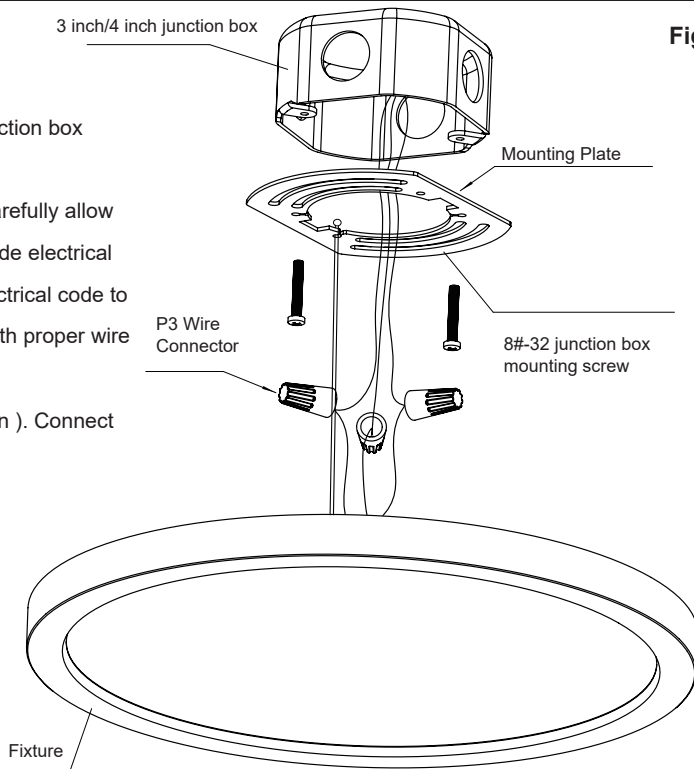


Fig. 1

VERIFIED LIST OF TESTED DIMMERS

Brand	Model No.
LUTRON	DVCL-153P-AL
	DVCL-253P-WH
	AYCL-253P-LA
	PD-6WCL-WH-R
Leviton	IPL06-10Z
	IPE04-1LZ

MAINTENANCE

- Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
- This product is suitable for damp locations.

IMPORTANT!

If the control is not paired properly to LED fixtures, irreparable damage may occur.