

GE Smart A19 Light Bulbs - Works with Savant (LIG-A196CRWS1) Quick Reference Guide


Specifications

Dimensions and Weight	
MOL	2.375 in (114 mm)
MOD	2.36 in (60 mm)
Weight	0.30 lbs (138g)
Electrical	
Input Voltage	120V
Lumens	800
Lumens per Watt	>85
CRI	>90
Lamp Equivalence	60W
Life Hours	15,000
Line Frequency	60 Hz
CCT & Color Range	2000K - 7000K, 16 million colors
Discharge Angle	230°
Start Time	<1s
Standby Power	<0.2W
Power Factor	>0.7 @ default color
Power	9.5W
Flickering Percentage	<30% @ 20% and 100% dimming @ default CCT
Short Term Flicker Perceptibility (PST)	<0.7 @ 10% dimming level
Stroboscopic Visibility Measure (SVM)	<1 @ 10% dimming level
Audible Noise	20dB @ 30cm
Hardware	
Base type	E26
Bulb Shape	A19
Burn Position	Universal
Environmental (Wet, Dry, Damp)	Damp
Indoor/Outdoor	Indoor

Box Contents

- (1) Smart A19 Indoor Bulb
- (1) Product Information Regulatory Statement

Smart A19 Indoor Bulb

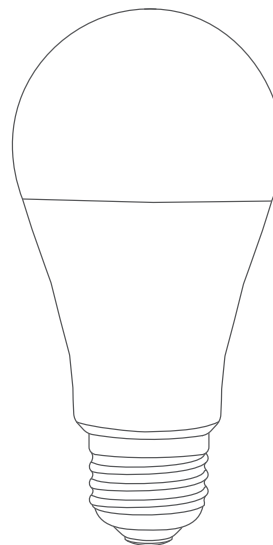

Networking

Wireless Protocol	Wi-Fi (2.4 GHz) and BLE
Mobile Compatibility	Works with iOS 13 and above and Android 9 and above
Out-of-Home Control	OTA

Regulatory and Warranty

Safety Listing	UL 1993
CEC Certification	Title 20
Warranty	3 Years