





# Sensor Product Accessories For Sensor-Operated Faucets

## P6000-MJ

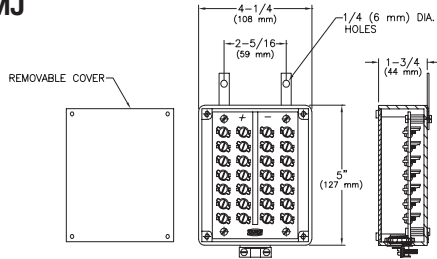


**ENGINEERING SPECIFICATION: ZURN P6000-MJ –** The Mini Junction Box is a 4-1/4" x 5" x 1-3/4" [108 mm x 127 mm x 44 mm] electrical enclosure designed to connect up to eight Zurn sensor urinals/closets. The unit includes a high impact plastic enclosure with polarity marked terminal board, high impact plastic cover panel, wall mounting tabs, integral strain relief, and illustrative wiring diagram.

## P6000-HW6

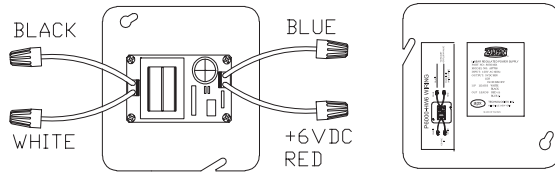


**ENGINEERING SPECIFICATION: Zurn P6000-HW6 Hardwire Power Converter –** Hardwire power converter to power up to 10 Zurn sensor urinal/closet flush valves or up to eight hardwired Zurn sensor faucets. The P6000-HW6 is mounted on a 4-11/16" x 4-11/16" cover plate that mounts to a standard 4-11/16" x 4-11/16" electrical box (supplied by others).

## P6900-ACA



**ENGINEERING SPECIFICATION: Z6900-ACA Plug-In Power Converter –** Plug-in Power Converter is designed to provide 6VDC power for eight Zurn 6VDC sensor faucets. Power converter plugs into 120VAC outlet (supplied by others) located conveniently to faucets. Electrical characteristics: Input: 120VAC, 60Hz, 35w; Output: 6VDC, 1.5A

## P6900-CWB



**ENGINEERING SPECIFICATION: Zurn P6900-CWB Connecting Wire –** Connecting wire to convert/connect battery-operated sensor faucet to P6000-HW6 power converter. The connecting wire is 84" long with one end bare to connect to power converter and the opposite end has an RCA connector to plug into electronics module of the faucet.