

SONANCE

TECHNICAL NOTE

TECHNICAL NOTE FOR CREATING AND EDITING A SPEAKER PRESET LIBRARY IN BLAZE BY SONANCE POWERZONE CONNECT AMPLIFIERS

DOWNLOAD PRESET FILES

- Download any Preset file(s) you wish to add.
- Browse to the location of the file that was downloaded and unzip if needed.
- IMPORTANT: the file extension for an individual speaker preset is .zcp. If you have a .zcl extension, this is a full preset library.

CREATING A LIBRARY

1. Open Amplifier Web UI by browsing to the amplifier's IP address or with the Blaze PowerZone Control app.
2. Go to SETTINGS TAB>SPEAKER LIBRARY.
3. Click 'CREATE'. A new window will open.
4. Name the library something of your choosing.
5. Highlight the text '>SPEAKER SERIES 1', then select the download icon (see Figure 1).
6. Click 'SELECT FILE SPEAKER PRESETS' and browse to the file containing the preset(s) you would like to add.
7. Select the preset(s) you would like to add, and select 'OPEN' to add them. Multiple can be selected at once.
8. Select 'UPDATE' to save the library. Select your preset in the 'OUTPUT' tab in the amplifier.

TIP: If adding multiple series of speaker presets, adding multiple folders inside of your library will help keep them organized and easy to find when applying a preset. Select 'ADD FOLDER' to add a folder and organize presets by brand, category, type, or use case. Edit the name of the folder by highlighting the folder and selecting the edit icon.

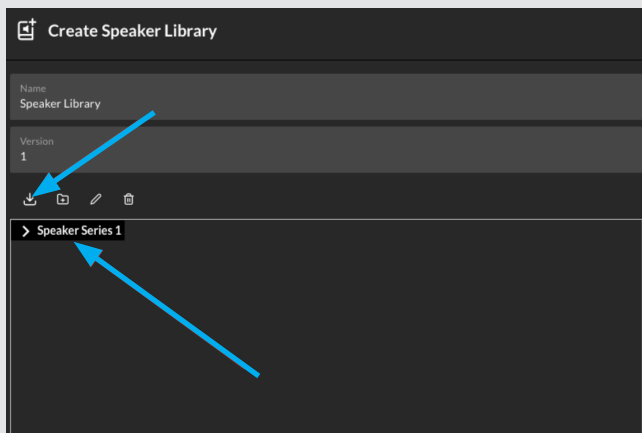


Figure 1: Highlight the text and Select Download Icon

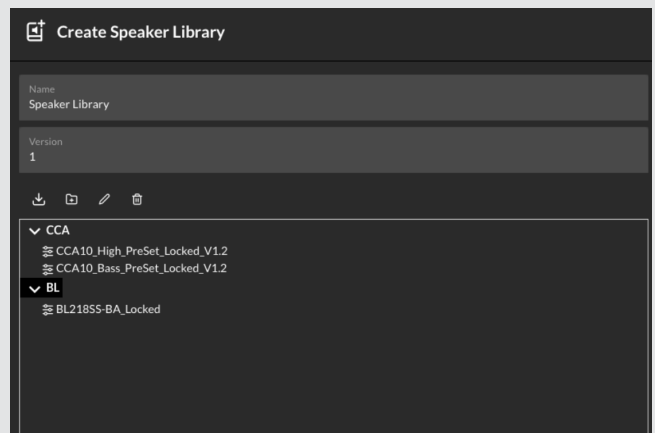


Figure 2

ADDING TO AN EXISTING LIBRARY

- Adding to an existing speaker preset library.
- Adding custom created presets you have created.

CREATING A LIBRARY

1. Open Amplifier Web UI by browsing to the amplifiers IP address or with the Blaze PowerZone Control app.
2. Go to SETTINGS TAB>SPEAKER LIBRARY.
3. Select 'EDIT'. A new window will open.
4. Select the 'NEW FOLDER' icon to create a new folder to add preset(s) (see Figure 1). This will create a new folder called Speaker Series 1. This will be different if there is already a folder called Speaker Series 1.
5. Name the new folder by highlighting the new folder and selecting the 'EDIT' icon and name the folder.
6. While highlighting the folder, select the 'DOWNLOAD' icon. A new window will open with an attachment icon. Select the icon to browse for the preset(s) to add. Multiple can be selected at once.
7. After selecting the preset(s) to add, select 'IMPORT'. The speaker preset is now loaded into the folder created.
8. Select 'UPDATE' to save the library. Select the preset in the 'OUTPUT' tab in the amplifier.
9. Select the preset in the 'OUTPUT' tab in the amplifier.

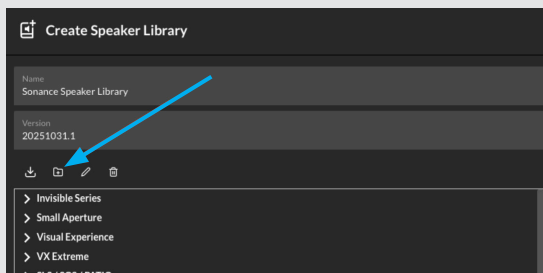


Figure 1: Create a New Folder

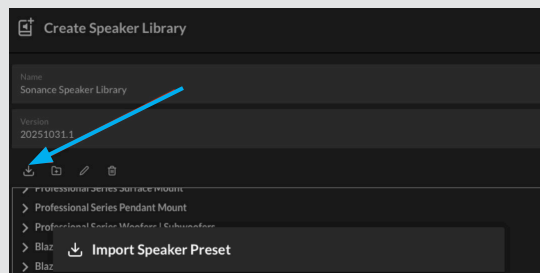


Figure 2

EXPORTING A CREATED LIBRARY

The export function of the amplifier allows the speaker preset library to be saved and loaded to different amplifiers.

1. Open Amplifier Web UI by browsing to the amplifiers IP address or with the Blaze PowerZone Control app.
2. Go to SETTINGS TAB>SPEAKER LIBRARY.
3. Select 'EDIT'. A new window will open.
4. Select 'EXPORT' to download the entire preset library to the downloads folder. The file should have a .zcl extension, indicating that it is a full library file.
5. Save the file to a notable location. To load the file, read the Tech Note on importing a speaker preset library.

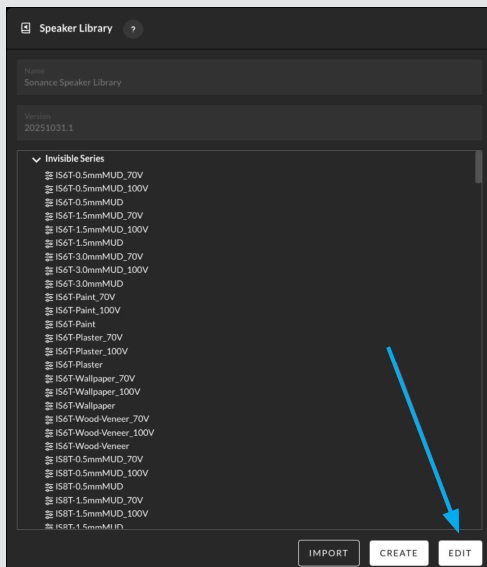


Figure 1: Create a New Folder

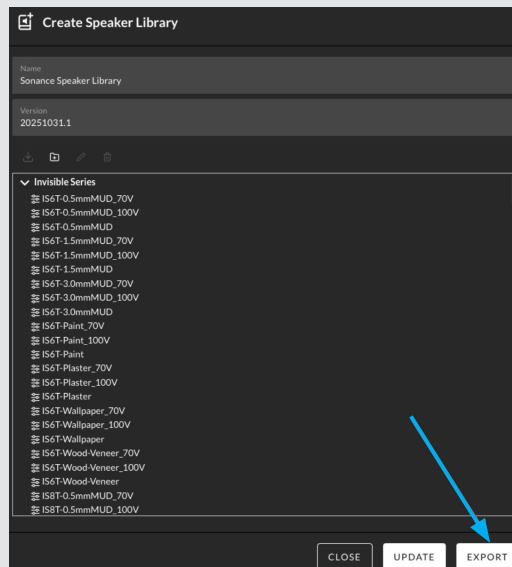


Figure 2