

### **NIC®R**®

# **ECL1-Select**

LED Emergency Exit Sign Combo



# ECL1-Select · LED EXIT SIGN COMBO



#### PRODUCT INFORMATION

Input Voltage (VAC) 120/277

Input Power (W)

Delivered Lumens (Lm)

Emergency Operation

90 Minutes

The ECL1-Select LED Emergency Exit Sign Combo features field-selectable red or green lettering. With included templates for both colors, simply install the slide color you need and flip the LED switch inside to match. The ECL1 is offered in white and features a universal mounting bracket for simple installation anywhere, and 90-minute emergency operation with integrated test button. This series is available in both a standard and remote-capable option to use with Remote Heads, available separately.

#### **Construction**

- Injection molded thermoplastic ABS housing
- UL-94 V-0 flame rating Flame Retardant
- Field-Selectable red and green LED light and lettering
- 6" Letter Height
- Single or Double face configuration
- Remote-capable option available

#### **Electrical**

- 1.9 Watts per head
- 120/277 Dual Voltage Operation, 60Hz input
- LED Indicator Light & Push Button Test Switch
- Integrated Ni-MH battery
- 90-minute emergency operation
- Operating temperature: 32°F to 104°F (0°C to 40°C)
- Damp Location Rated

#### Installation

• Universal mounting plate with EZ quick connect

#### Listings

• Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

#### **Dimensions** T 3.74 in 7.95 in (95mm) (202mm) 3.74 in 12 in (305mm) 16.10 in (409mm)










## **APPLICATIONS**







### **FEATURES**

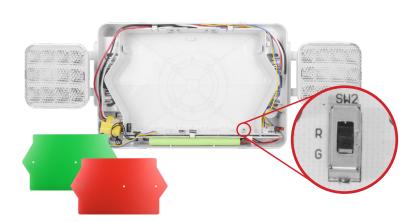

The ECL1-Select features field-selectable Red and Green lettering.



Ordering Information						
Series	Version	Voltage	Housing Color	Lettering	No. of Sides	Remote
ECL1	<b>20</b> (2.0)	<b>UNV</b> (120/277VAC)	WH (White)	S-2 (Red & Green Select)	2	_ (None)
						R (Remote)





#### **Warehouse Locations:**

Albuquerque, NM Buford, GA Roseville, CA NICOR Lighting 2200 Midtown Pl. NE Albuquerque, NM 87107 USA

**T 800.821.6283** F 800.892.8393 www.nicorlighting.com

