

EMB45

NICOR Emergency Pack 4.5W

Product Description

The EMB45 is an LED emergency driver for factory or field installations that enables normal and emergency operation of a switched or non-switched LED fixture. During a power failure, the EMB45 activates emergency mode to maintain output wattage to the fixture without light degradation for a 90 min duration. The EMB45 contains a battery, charger, and converter circuit in a single housing.

Construction

- Heavy duty steel case
- Red powder coat finish
- 24" flexible conduit leads

Electrical

- Long life high temperature Ni-Cad battery
- Single piece test switch/charge indicator included
- Constant power design provides consistent lumen output for >90 minutes
- Self sensing output voltage adjusts for various products such as troffers, downlights, strips, etc.
- 24 hour recharge time

Installation

- For use with switched or unswitched fixtures
- Rated for plenum, damp location, and type IC luminaires
- UL Classified for factory and field installation

Warranty

- 5-year limited system warranty standard

PRODUCT INFORMATION

Input Voltage:	120-277 VAC 50/60 Hz
Input Power:	5.0 W
Output Voltage:	3-60 VDC
Output Power:	4.5W (Constant)
Emergency Operation:	90 Minutes
Operating Temp:	32°F to 122°F (0°C - 50° C)
Weight:	2.4 lbs

Accessory




Test Button Face Plate	FP-LEV-PJ11-WH
------------------------	----------------

Project

Catalog

Type

Date

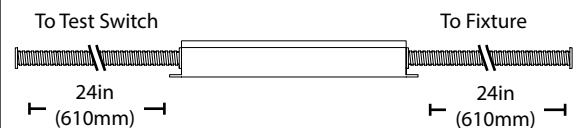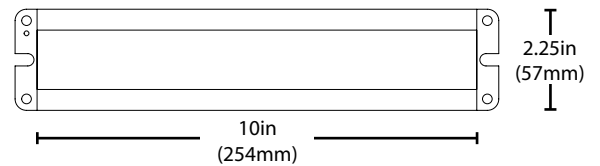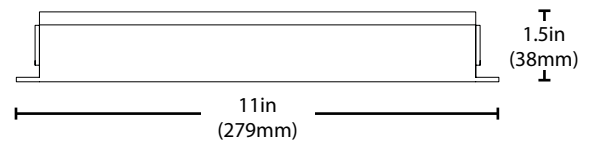

Ordering Information

Example: EMB45-10-UNV

Series	Version	Voltage
EMB45	10 (Version 1)	UNV (120-277V)

Specifications and dimensions subject to change without notice