


DWG. NO.		250-500-0855P	
REV	DESCRIPTION	BY DATE	APPRO
A	ECR 7057	JWH 10/15/01	K 10/15/01

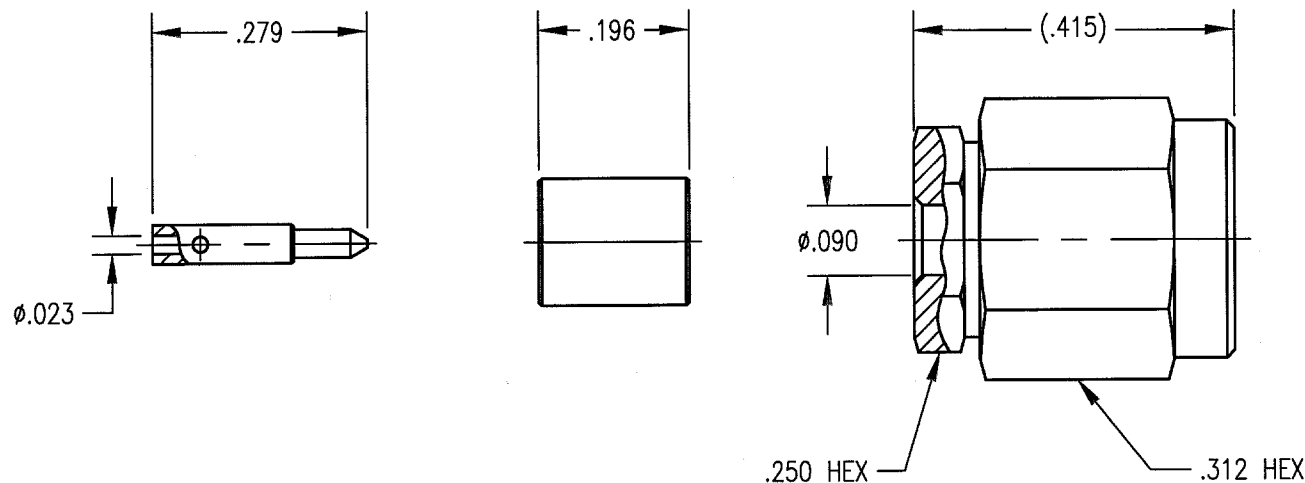

NOTES:

1. MATERIALS:

BODY AND NUT: STAINLESS STEEL PER ASTM A582
 CONTACT: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 RETAINING RING: BERYLLIUM COPPER PER ASTM B196
 GASKET: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 COUPLING NUT: PASSIVATE PER ASTM A967

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)		Litton	
TOLERANCES: DECIMALS: .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2°		Winchester/Retconn 400 Park Road Watertown, Connecticut 06795	
SCALE: 4:1		TITLE	
CUSTOMER DRAWING		SMA STRAIGHT PLUG	
DRAWN JWH	DATE 10/15/01	CHECKED K. S.	DATE 10/15/01
APPROVED JWH	DATE 10/15/01	APPROVED K. S.	DATE 10/15/01
A		250-500-0855P	
SHT. 1		OF 1	
REV. A			