


#### Foster / Schrader Interchange



Brand	Socket Assembly	Socket	Male Plug w/ 1/4" Female npt	Male Plug w/ 1/4" npt Male		Dust Cover Plug
Foster Steel <b>B</b>	467044	628770	55716	56549	59686	486289
Foster (SST) <b>B</b>	801016	636459	636460	None	59686	486289
Schrader <b>B</b>	467044	628770	55716	56549	59686	486289

# Foster Brass (BR) Hansen Stainless Steel (SST) Hansen Brass (BR)

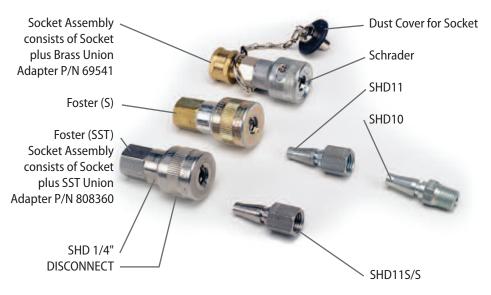


Brand	Socket Assembly	Socket	Male Plug w/ 1/4" Female npt	Male Plug w/ 1/4" npt Male		Dust Cover Plug
Foster (BR) <b>B</b>	470194	629980	629981	473501	636914	634687
Hansen (SST) <b>B</b>	471779	628768	628208	473502	636914	634687


#### PLEASE NOTE:

Fittings with the same letter code in **bold** are interchangeable.

#### Foster Stainless Steel (SST)

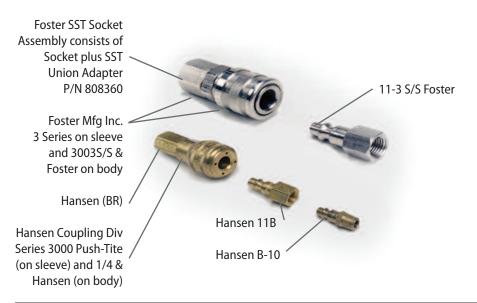


Brand	Socket Assembly	Socket	Male Plug w/ 1/4" Female npt	Male Plug w/ 1/4" npt Male		Dust Cover Plug
Foster (SST) <b>D</b>	800805	636473	637851	None	None	None
Hansen (BR) <b>D</b>	471501	630311	630313	630312	637234	634686

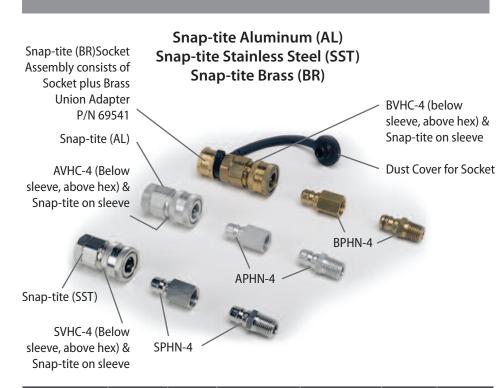

Brand	Socket Assembly	Socket	Male Plug w/ 1/4" Female npt	Male Plug w/ 1/4" npt Male		Dust Cover Plug
Snap-tite (AL) <b>C</b>	455019	66272	66274	66273	633560	634450
Snap-tite (SST) <b>C</b>	471778	629673	629672	629671	633560	634450
Snap-tite (BR) <b>C</b>	471777	630305	630307	630306	633560	634450

# **Quick-Disconnect Fittings for Air-Line Hose**

# CEJN Chrome Locking Snap-tite Aluminum (AL) Locking

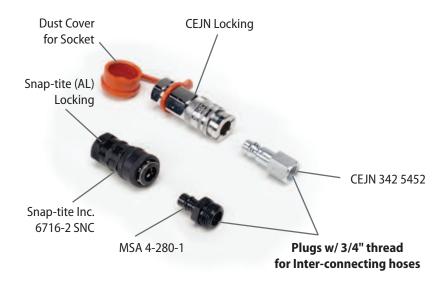

For Inter-connecting Airline Hoses, only the following fittings are approved:

Brand	Plug & Socket Assembly	Socket Assembly	Male Plug w/ 3/4"-16 Male
CEJN Locking <b>E</b>	479009	476956	476955
Snap-tite (AL) Locking <b>F</b>	479010	479032	479015

#### **PLEASE NOTE:**

Fittings with the same letter code in **bold** are interchangeable.

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.

ID 0100-05-MC / Apr 2010 © MSA 2010 Printed in U.S.A. Corporate Headquarters
P.O. Box 426, Pittsburgh, PA 15230 USA
Phone 412-967-3000
www.MSAnet.com

 U.S. Customer Service Center

 Phone
 1-800-MSA-2222

 Fax
 1-800-967-0398

MSA Canada Phone 1-800-672-2222 Fax 1-800-967-0398


MSA Mexico
Phone 01 800 672 7222
Fax 52 - 44 2227 3943

MSA International
Phone 412-967-3354
Fax 412-967-3451

Offices and representatives worldwide For further information:



#### **CEJN Chrome Locking**

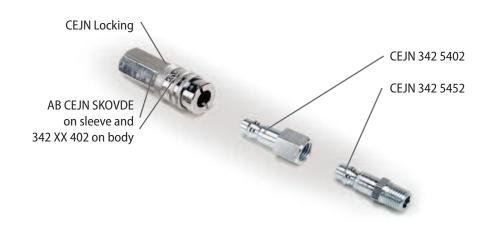

Brand	Socket Assembly	Socket	Male Plug w/ 1/4" Female npt	Male Plug w/ 1/4" npt Male	Dust Cover Socket	Dust Cover Plug
CEJN Locking <b>E</b> (2-pc socket assy)	479001	631870	479026	479020	636349	634450
CEJN Locking 1/4" <b>E</b> (1-pc socket assy)	476956	None	479026	479020	636349	634450

### Snap-tite Aluminum (AL) Locking Snap-tite Stainless Steel (SST) Locking Snap-tite Brass (BR) Locking



Brand	Socket Assembly	Socket	Male Plug w/ 1/4" Female npt	Male Plug w/ 1/4" npt Male		Dust Cover Plug
Snap-tite (AL) Locking <b>F</b>	479032	None	479027	None	None	634450
Snap-tite (SST) Locking <b>F</b>	479033	None	479028	479022	None	634450
Snap-tite (BR) Locking <b>F</b>	479034	None	479029	479023	None	634450

## **Adapters and Bushings**

#### **Union Adapters**

Union Adapters: Brass or Stainless Steel:
Male to Female = 1/4" NPT Male X 3/4"-16
Female (MSA 3/8" Airline Hose Thread)

Union Adapters: Brass or Stainless Steel:
Male to Male = 1/4" NPT Male X 3/4"-16
Male (MSA 3/8" Airline Hose Thread)

**Replacement O-Rings:** Can purchase as P/N 455804 2/pkg or each as P/N 69543

Adapter	Adapter 1/4" NPT Male to 3/4" 1/ Female (Hose Thread) N		1/4"NPT Female to 3/4" Male (Hose Thread)
Union Adapter (BR)	69541	69542	628232
Union Adapter (SST)	808360	808358	None

