
SPECIFICATION SUBMITTAL SHEET

jones stephens corporation

CAST IRON PUSH-ON CLEANOUT

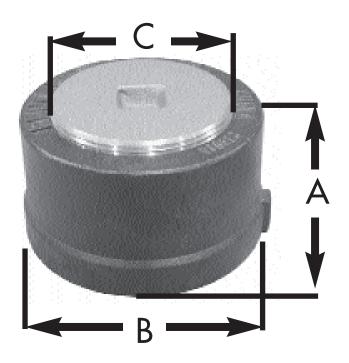

features and benefits:

- Meets ASTM A74-98 and ASME A112.36.2M-91
- Cut pipe to desired level, lube gasket and push on pipe, tap with lead hammer to seat, then install plug
- Schedule 40 unit fits plastic and extra heavy cast iron pipe
- Brass plug

This product and others like it can be found in the Jones Stephens catalog.
Call today to order your catalog or download it from our website:

www.plumbest.com

	HEIGHT	ID	PIPE SIZE	PLUG STYLE
PART NO.	Α	В	С	D
LESS GASKET				
□ C36-003	3″	4"	3" SV	Raised Head
☐ C36-013	3″	4"	3" SV	Countersunk
□ C36-004	3″	5″	4" SV	Raised Head
□ C36-014	3″	5″	4" SV	Countersunk
□ C36-024	3″	5 ³ /8"	4" Sch. 40	Raised Head
□ C36-034	3″	5 ³ /8"	4" Sch. 40	Countersunk
□ C36-006	23/4"	7 ³ /16"	6" SV	Raised Head
□ C36-016	2 ³ /4"	7³/16″	6" SV	Countersunk
WITH GASKET				
□ C36-104	3 1/4"	37/8"	4" SV	Raised Head
□ C36-114	3 1/4"	37/8"	4" SV	Countersunk
□ C36-124	3 1/4"	4 1/4"	4" Sch. 40	Raised Head
□ C36-134	3 1/4"	4 1/4"	4" Sch. 40	Countersunk
□ C36-106	3″	5 ³ /4"	6" SV	Raised Head
□ C36-116	3″	5 ³ /4"	6" SV	Countersunk

jones stephens corporation

3249 moody parkway • moody, alabama 35004

toll free phone: 1-800-355-6637 • toll free fax: 1-800-462-6991

www.plumbest.com