

Brook™ features the subtle and calming movement of a flowing river. The four earthy shades and three standard sizes provides endless design opportunities. The timeless and versatile design is sure to enhance any space.

BROOK™
Glazed Ceramic




FLOOR / WALL


RESIDENTIAL

COMMERCIAL

INDOOR

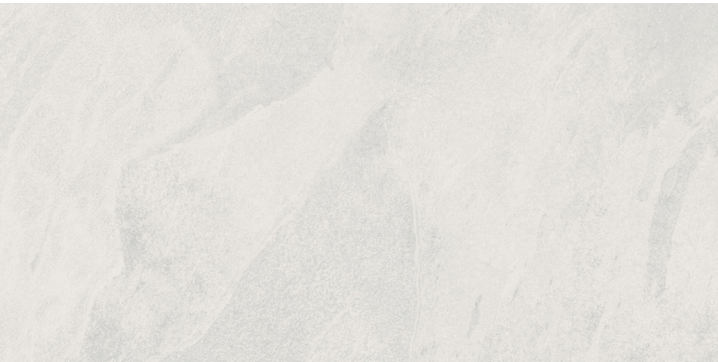

White

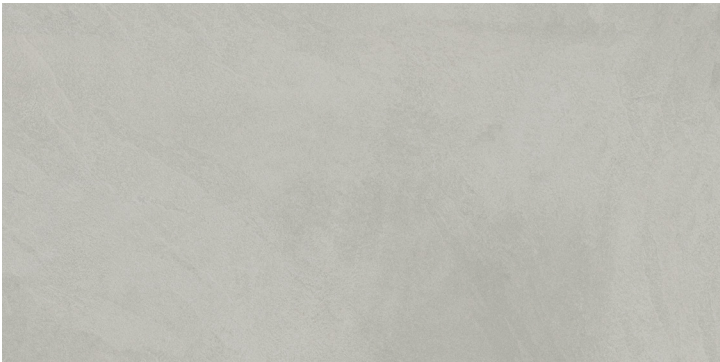

Silver




Cream




Graphite


Mosaics




White



Silver



Cream



Graphite

Sizes							
	18" x 18" 17.72" x 17.72"	14" x 14" 13.78" x 13.78"	12" x 24" 12.01" x 23.86"	12" x 12" Mesh	3" x 12" Floor SBN		
Thickness	8.3-9.0mm	8.1-8.5mm	8.8-9.2mm	Check Website	Check Website		
Faces	12	24	16	N/A	N/A		
Finish	Matte	Matte	Matte	Matte	Matte		
Edge	Pressed	Pressed	Pressed	Cut	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"	3/16"	3/16"	3/16"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	Graphite: II Silver, Cream: III White: IV	>250 lbf	Resistant	3.0-7.0%	>0.42	6	V4

Product and Installation Details | ANSI A108.02
Section 4.3.8.2 - For running bond/brick joint patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



-  Sustainability Attributes
 - Red List Free
 - Health Product Declaration (HPD) provided upon request
 - Product Packaging is 100% recyclable
- VOC Free

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.