



Submitted Model No.: _____

Specific Features: _____

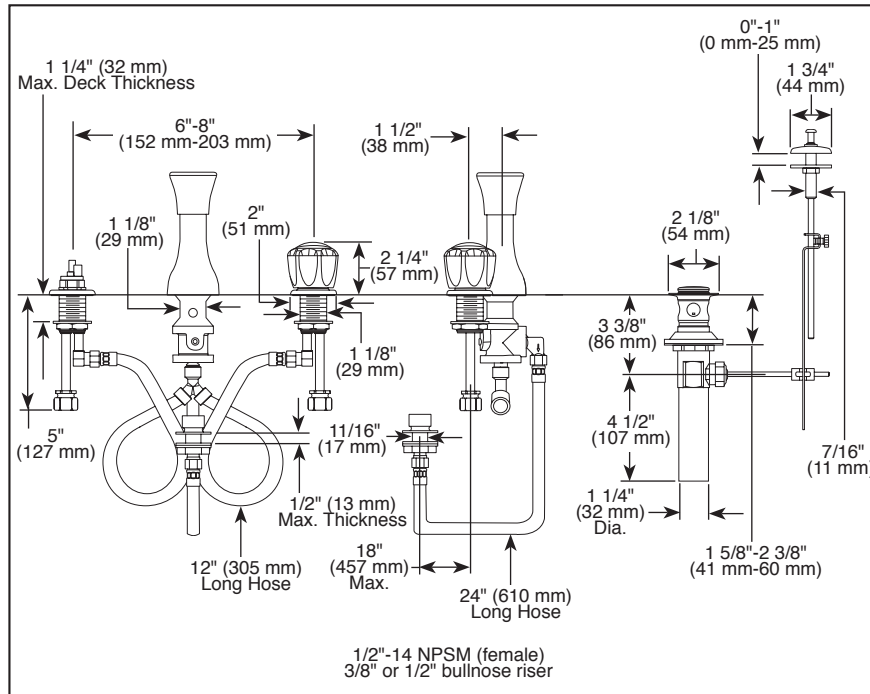

▲ Designate proper finish suffix

Available LHP Handle Options

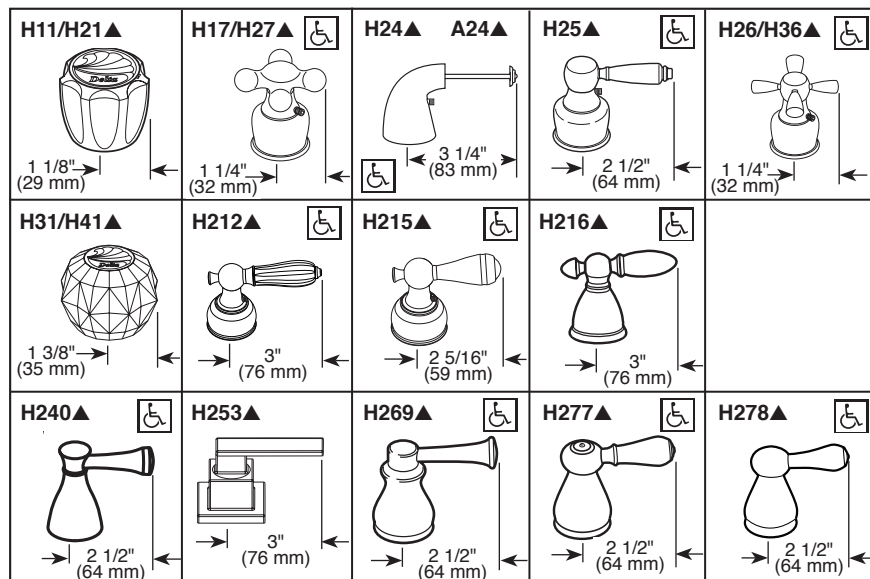

SPECIALTY FAUCETS

- Three Handle Bidet Valve
- Four Hole Installation

STANDARD SPECIFICATIONS:

- Solid fabricated brass end valves
- Widespread flexible mounting installation
- Clear knob handles with red/blue indicators or LHP-Less Handle Program. See handle options below.
- Directional handle for rim flush or rosette spray.
- Control mechanism is a rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.
- 3/8" O.D. copper tube inlets with 1/2"-14 NPSM adapters.
- Metal pop-up drain assembly.
- Model 44 series has vacuum breaker.
- For handle H253 you must also order RP62961, which contains 62480 base and 1713 bonnet.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1

Available LHP Handle Accent Options with Matching Lift Knobs



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-S-44 Rev. D

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2017 Masco Corporation of Indiana