


UniFi® Protect





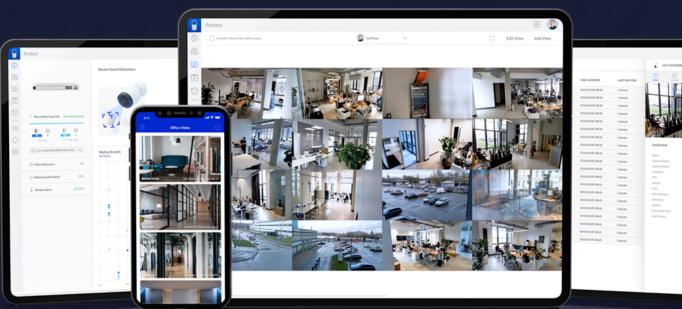

Camera G3 Bullet

Versatile Full HD (1080p) indoor/outdoor bullet camera with 30 FPS and infrared LEDs.



The UniFi Protect Camera G3 features a clear 1080p video resolution. The ball-joint mount offers flexible 3-axis adjustment and can be mounted indoors or outdoors. The camera has infrared LEDs with an automatic IR cut filter for day and night surveillance.

Mechanical

Dimensions	Ø75 x 140 mm (Ø2.95 x 5.51")
Weight	Without mount: 335 g (11.82 oz) With mount: 385 g (13.58 oz)
Enclosure materials	Polycarbonate, aluminum alloy
Mounting materials	Polycarbonate, aluminum alloy
Weatherproofing	IPX4

Optics

Sensor	1/2.8" 2MP sensor
Lens	EFL 3.6 mm, f/1.8
View angle	Before lens correction: H: 85°, V: 45°, D: 98° After lens correction: H: 72°, V: 43°, D: 80°
Night mode	Built-in IR LED illumination and IR cut filter

Video

Video compression	H.264
Resolution	1920 x 1080 (16:9)
Maximum frame rate	30 FPS
Image settings	Brightness, contrast, sharpness, saturation, noise reduction, 50/60 Hz

System

Processor specs	Arm® Cortex®-A9
Management interface	UniFi Protect
Networking interface	10/100 MbE RJ45 port
Flash memory support	Micro SD card (32 GB max.)
Max. power consumption	4W
Power method	802.3af PoE mode A
Supported voltage range	24 to 48VDC
Button	Factory reset
Mounting	Wall/ceiling, pole mount (kit included)
Operating temperature	-20 to 40° C (-4 to 104° F)
Operating humidity	20 to 90% noncondensing
Certifications	FCC, IC, CE



Audio

Microphone Yes (can be disabled in software)

Software

Controller software UniFi Protect

Mobile apps UniFi Protect iOS and Android

