





HVAC & LP GAS DISTRIBUTION CATALOG

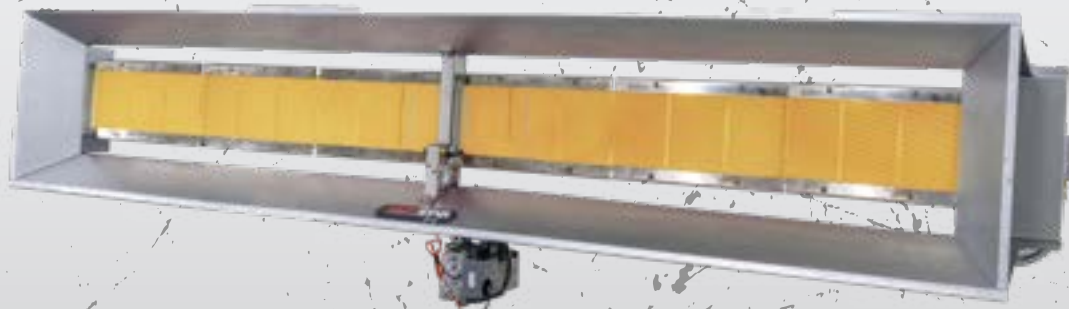

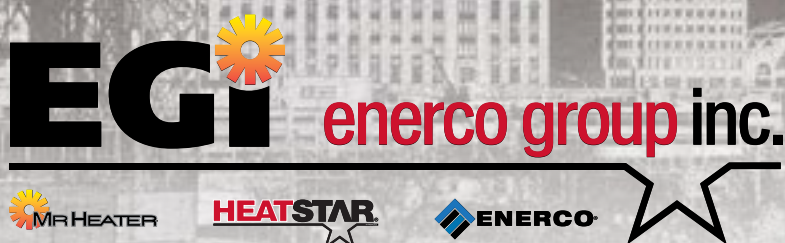

Enerco Group, Inc., based in Cleveland Ohio, has been at the forefront of infrared and combustion technology since 1957. Market leading engineering and experience has enabled EGI to build expertise in the consumer heating, heavy duty industrial, construction, custom process heating and now, agricultural and greenhouse heating markets. Over six decades, EGI has developed brands and product lines tailored to the needs of these market segments.

Since 1984, EGI has established several brands generating rapid growth via retail distribution. The Mr. Heater® brand is America's most popular heater brand in the consumer market. It includes an array of products geared to the specialized needs of the outdoor enthusiasts.

Heatstar® by Enerco and Enerco® are leading brands in the construction, equipment rental, and industrial arenas. These heaters are engineered with rugged designs geared to meet the durability and toughness demands of construction and industrial work sites. The Heatstar® brand is sold exclusively through professional tool, industrial, rental, HVAC and LP gas distributors. The Enerco® brand applies to a complete line of hoses, fittings, and accessories marketed through industrial, professional HVAC, LP Gas, and Recreational Vehicle distributors.

In 2013, Stanley Black and Decker selected Enerco Group, Inc. to be the North American licensee to make and market DEWALT® Portable Heaters. The DEWALT® license arrangement was expanded to include Europe in 2017. In 2015, the Heatstar AG® brand was launched with a group of products custom built for agriculture and greenhouse applications.

Through product innovation, world class quality, outstanding marketing, and world class customer service, EGI has earned North American market leading positions in each of the markets we serve.



Page 5



Page 10



Page 12



Page 14

Description	Page
Vent Free Heaters	4-5
Radiant Tube Heaters	6-8
High Intensity Infrared Heaters	9
Restaurant/Patio Heaters	10
Garage/Workshop/Cabinet Heaters	11
Gas Unit Heaters	12-13
NOMAD™ Box Heaters	14
Pro Series Indirect/Direct-Fired Heaters	15
Forced Air Propane & Natural Gas Heaters	16
Forced Air Kerosene Heaters	16
Portable Construction Heaters	17
DeWalt® Job Site Heaters	18
Portable Propane Buddy Heaters	19
Electric Heaters	20
Fuel Keg™	21
Portable Propane Tank Top Heaters	22
Hand & Foot Warming Products	23
Portable Propane Stoves & Torches	23
Bulk Hoses, Fittings & Regulators	24-25
Enerco® LPG Reels, Fittings & Regulators	26
TruZero® LPG Fittings & Accessories	27

Icon guide



Easy repairs
Tech service:
1-866-447-2194



Heavy-duty



Indoor safe



Easy-grip handle



CSA Certified



ETL Certified

VENT FREE INFRARED HEATERS



BEST FOR: DRAFTY AREAS

Radiant heat works by warming people and objects instead of the air, which in turn warms the space, much like the sun warming your face on a cold day.

Item #	Description
F156001	HSSVFRD10LPT - (Propane) - 10,000 BTU/Hr.
F155226	HSSVFRD10NG - (Natural Gas) - 10,000 BTU/Hr.
F155229	HSSVFRD10LP (Propane) - 10,000BTU/Hr.
F156041	HSSVFRD20NGBT- (Natural Gas) - 20,000 BTU/Hr.
F156051	HSSVFRD20LPBT - (Propane) - 20,000 BTU/Hr.
F156081	HSSVFRD30NGBT - (Natural Gas) - 30,000 BTU/Hr.
F156091	HSSVFRD30LPBT - (Propane) - 30,000 BTU/Hr.

FEATURES

- Blower fan included (20 & 30,000 models only)
 - Effectively circulates heat
- Wall mount bracket & floor mount feet included
 - Easy to install
- Electronic ignition
- Thermostat included - As noted in chart below
- Safe - Built-in low oxygen shut-off sensor
- Economical - 99.9% Efficient
- 5-Year limited warranty

Item# Model#	F156001 HSSVFRD10LPT	F155226 HSSVFRD10NG	F155229 HSSVFRD10LP	F156041 HSSVFRD20NGBT	F156051 HSSVFRD20LPBT	F156081 HSSVFRD30NGBT	F156091 HSSVFRD30LPBT
BTU Rating	10,000	10,000	10,000	20,000	18,000	30,000	30,000
Burn Rate	0.463 lbs/hr	0.001 MCF	0.463 lbs/hr	0.020 MCF	0.926 lbs/hr	0.030 MCF	1.389 lbs/hr
Variable Output	NO	YES	YES	NO	NO	NO	NO
Heats Up To: (Approx. Sq. Ft.)	300	300	300	700	700	1,000	1,000
Fuel	Propane	Natural Gas	Propane	Natural Gas	Propane	Natural Gas	Propane
Minimum Recommended Tank Size	20 lb.	NA	20 lb.	NA	20 lb.	NA	20 lb.
Certified	YES	YES	YES	YES	YES	YES	YES
Low Oxygen Safety Shut-Off	YES	YES	YES	YES	YES	YES	YES
Feet & Hardware Included	YES	YES	YES	YES	YES	YES	YES
Ignition	Electronic	Piezo	Piezo	Electronic	Electronic	Electronic	Electronic
Integrated Blower Fan	NO	NO	NO	YES	YES	YES	YES
Thermostat	YES	NO	NO	YES	YES	YES	YES

* 4500 ft high altitude restriction (see manual for use above 4,500 feet)

* Not Approved for use in California or Canada.

This heater obtained the indicated BTU ratings when tested per ANSI Z21.11.2-2002, addenda Z21.11.2a-2003 "Gas Fired Room Heaters", Volume II, "Unvented Room Heaters." Always check local codes for permitted uses.

VENT FREE BLUE FLAME HEATERS



BEST FOR: INSULATED AREAS

Convection heat works by dispersing heated air, which then warms the space from the top down, much like a fireplace. Blue Flame warms the air and can be put in narrow areas.

Item #	Description
F156011	HSSVFBF10LPT - (Propane) - 10,000 BTU/Hr.
F155550	HSSVFBF10NG - (Natural Gas) - 10,000 BTU/Hr.
F155583	HSSVFBF10LP (Propane) - 10,000 BTU/Hr.
F156021	HSSVFBF20NGBT- (Natural Gas) - 20,000 BTU/Hr.
F156031	HSSVFBF20LPBT - (Propane) - 18,000 BTU/Hr.
F156061	HSSVFBF30NGBT - (Natural Gas) - 30,000 BTU/Hr.
F156071	HSSVFBF30LPBT - (Propane) - 30,000 BTU/Hr.

FEATURES

- Blower fan included (20 & 30,000 models only)
 - Effectively circulates heat
- Wall mount bracket & floor mount feet included
 - Easy to install
- Electronic ignition
- Thermostat included - As noted in chart below
- Safe - Built-in low oxygen shut-off sensor
- Economical - 99.9% Efficient
- 5-Year limited warranty

Item# Model#	F156011 HSSVFBF10LPT	F155550 HSSVFBF10NG	F155583 HSSVFBF10LP	F156021 HSSVFBF20NGBT	F156031 HSSVFBF20LPBT	F156061 HSSVFBF30NGBT	F156071 HSSVFBF30LPBT
BTU Rating	10,000	10,000	10,000	20,000	18,000	30,000	30,000
Burn Rate	0.463 lbs/hr	0.001 MCF	0.463 lbs/hr	0.020 MCF	0.926 lbs/hr	0.030 MCF	1.389 lbs/hr
Variable Output	NO	YES	YES	NO	NO	NO	NO
Heats Up To: (Approx. Sq. Ft.)	300	300	300	700	700	1,000	1,000
Fuel	Propane	Natural Gas	Propane	Natural Gas	Propane	Natural Gas	Propane
Minimum Recommended Tank Size	20 lb.	NA	20 lb.	NA	20 lb.	NA	20 lb.
Certified	YES	YES	YES	YES	YES	YES	YES
Low Oxygen Safety Shut-Off	YES	YES	YES	YES	YES	YES	YES
Feet & Hardware Included	YES	YES	YES	YES	YES	YES	YES
Ignition	Electronic	Piezo	Piezo	Electronic	Electronic	Electronic	Electronic
Integrated Blower Fan	NO	NO	NO	YES	YES	YES	YES
Thermostat	YES	NO	NO	YES	YES	YES	YES

* 4500 ft high altitude restriction (see manual for use above 4,500 feet)

* Not Approved for use in California or Canada.

This heater obtained the indicated BTU ratings when tested per ANSI Z21.11.2-2002, addenda Z21.11.2a-2003 "Gas Fired Room Heaters," Volume II, "Unvented Room Heaters." Always check local codes for permitted uses.

RADIANT TUBE HEATERS

ERSP (SINGLE STAGE), ERXL (SINGLE STAGE), & ER2STG (TWO-STAGE) TUBE HEATERS



Straight Installation



U-Tube Installation

FEATURES

- 10-Year warranty*
- Available in 10 to 60 foot system lengths
- Aluminized 16 gauge steel tubing
- Outside or inside air for combustion
- Sealed burner control box
- Full cover polished aluminum reflector
- Reflectors install horizontally or at 45°
- Stainless steel couplers
- Chrome plated hanging brackets
- Underside burner sight glass
- All components are name-brand non-proprietary
- 24 Volt or line voltage thermostat install option
- Layout and design service available
- **NG burners include LP conversion kit**

*Warranty limited to 2 years in ammonia, chlorine, chemical exposure and car wash installations. See 2016 owners manual for complete details.



ACCESSORY KITS

***Installation kits include vent cap, thermostat, shut-off valve, SS flex connector & chain kits.**

Item #	Description
F102603	*Installation kit for 30' unit (ER 2STG100)
F102604	*Installation kit for 40' unit (ER 2STG125)
F102606	*Installation kit for 50' unit (ER 2STG125/175)
F102608	*Installation kit for 60' unit (ER 2STG175)

Item #	Description
F106414	180° U-Tube Kit
F106415	90° Elbow Kit
14585P	Hanger Kit (2 per 10')
17370	Chain Kit (1 per 10')

Item #	Description
F111751	*Installation kit for 20' unit(ERXL-60, 80)
F111752	*Installation kit for 30' unit(ERXL-80, 100)
F111753	*Installation kit for 40' unit(ERXL-100, 125)
F111754	*Installation kit for 50' unit(ERXL 125,150, 175)
F111755	*Installation kit for 60' unit (ERXL 150, 175)

Item #	Description
00438	Side Reflector Kit
F102601	ER2STG Thermostat
10371	24V Thermostat
10392	120V Thermostat

ERSP - Single Stage Burner Boxes - Spark Ignition

Item #	Model #	BTU/HR	Gas
F102594SP	ERSP40-N	40,000	NG
F102595SP	ERSP40-LP	40,000	LP
F102650SP	ERSP60-N	60,000	NG
F102651SP	ERSP60-LP	60,000	LP
F102652SP	ERSP80-N	80,000	NG
F102653SP	ERSP80-LP	80,000	LP
F102654SP	ERSP100-N	100,000	NG
F102655SP	ERSP100-LP	100,000	LP

Item #	Model #	BTU/HR	Gas
F102656SP	ERSP125-N	125,000	NG
F102657SP	ERSP125-LP	125,000	LP
F102658SP	ERSP150-N	150,000	NG
F102659SP	ERSP150-LP	150,000	LP
F102660SP	ERSP175-N	175,000	NG
F102661SP	ERSP175-LP	175,000	LP

ERXL - Single Stage Burner Boxes - Hot Surface Ignition

Item #	Model #	BTU/HR	Gas
F102594XL	ERXL40-N	40,000	NG
F102595XL	ERXL40-LP	40,000	LP
F102650XL	ERXL60-N	60,000	NG
F102651XL	ERXL60-LP	60,000	LP
F102652XL	ERXL80-N	80,000	NG
F102653XL	ERXL80-LP	80,000	LP
F102654XL	ERXL100-N	100,000	NG
F102655XL	ERXL100-LP	100,000	LP

Item #	Model #	BTU/HR	Gas
F102656XL	ERXL125-N	125,000	NG
F102657XL	ERXL125-LP	125,000	LP
F102658XL	ERXL150-N	150,000	NG
F102659XL	ERXL150-LP	150,000	LP
F102660XL	ERXL175-N	175,000	NG
F102661XL	ERXL175-LP	175,000	LP

ER2STG - 2 Stage Tube Burner Boxes - Hot Surface Ignition

Item #	Model #	BTU/HR	Gas
F102600	ER 2STG100-N	60,000 LOW - 100,000 HIGH	NG
F102602	ER 2STG100-LP	60,000 LOW - 100,000 HIGH	LP
F102605	ER 2STG125-N	80,000 LOW - 125,000 HIGH	NG
F102607	ER 2STG125-LP	80,000 LOW - 125,000 HIGH	LP
F102610	ER 2STG175-N	125,000 LOW - 175,000 HIGH	NG
F102612	ER 2STG175-LP	125,000 LOW - 175,000 HIGH	LP

**ALL NG BURNERS INCLUDE
LP CONVERSION KIT**

TUBE SETS - For use with ERSP, ERXL, & ER2STG Burner Boxes


Tube sets include: Tubes, reflectors, hangers, couplers, & vent adapter, plus turbulator where necessary

		Mounting Clearance to Combustibles							
Item #		Use with Burner Box models	Length	Top Horizontal	Top 45° Angle	Straight Below	Sides	Typical Mounting Height	Shipping Weight (lbs.)
F106408XL	N/A	ERXL40 (10' Turbulator)	10'	6"	12"	55"	30"	10-14'	90
F106404XL	S106404XL	ERXL60/80 (10' Turbulator)	20'	6"	18"	55"	36"	12-15'	110
F106405XL	S106405XL	ERXL80 (10' Turbulator)	30'	6"	18"	55"	36"	12-15'	110
F106401XL	S106401XL	ERXL100 (5' Turbulator) or ER2STG100 N/LP	30'	6"	18"	74"	36"	12-15'	130
F106406XL	S106406XL	ERXL100/125 or ER2STG125 N/LP	40'	6"	18"	87"	36"	14-19'	150
F106407XL	S106407XL	ERXL125/150/175 or ER2STG125/175 N/LP	50'	6"	18"	87"	36"	15-25'	170
F106403XL	S106403XL	ERXL150/175 or ER2STG175 N/LP	60'	6"	18"	87"	36"	15-25'	190

* Hot Rolled Steel Tube Set only the first tube is aluminized*

* Aluminized Tube Set all tubes are aluminized*

HS45GSP TUBE HEATERS

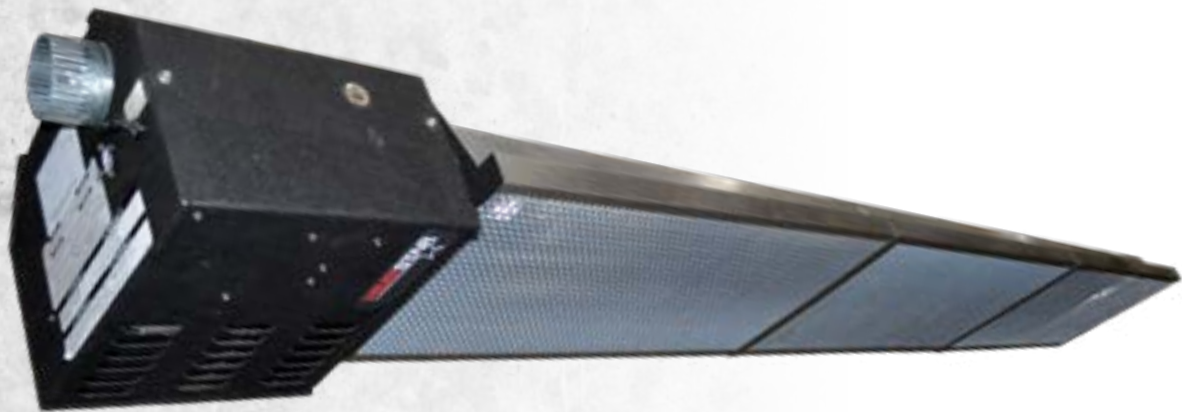


*Pictured with optional grid kit



FEATURES

- 45,000 BTU/HR
- Compact 3" aluminized steel u-tube design
- Provides uniform heat distribution
- Polished aluminum deep-dish reflector
- Quiet operation
- 120vac, single phase, 1 amp
- Low clearance requirements
- Reliable direct spark ignition
- Burner and tube set in one box

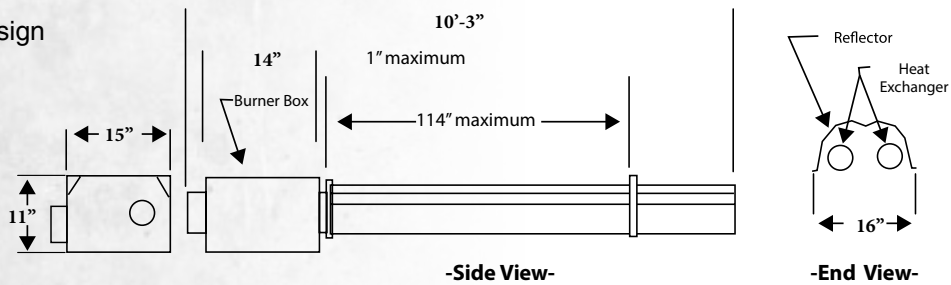

TUBE HEATERS

Item #	Model #	BTU/HR	Gas
F102857	HS45GSP-NG	45,000	NG
F102855	HS45GSP-LP	45,000	LP

VENTING SPECIFICATIONS

Length min.	Length Max.	Intake/Pipe	Vent Pipe
3'	25'	3" Diameter	4" Diameter

TUBE HEATER SPECIFICATIONS

Data	HS45GSP-NG	HS45GSP-LP
Stock Number	F102857	F102855
Input (BTU/HR)*	45,000	45,000
Fuel Type	Natural Gas	Propane
Electrical Rating	120VAC, 60Hz, single phase, 1 amp	120VAC, 60Hz single phase 1 amp
Electrical Connection	3 pin moulded plug	3 pin moulded plug
Gas Inlet Connection	1/2" female NPT	1/2" female NPT
Gas Inlet Pressure Minimum/Maximum	5.0" / 10.5" w.c.	11.0" / 13.5" w.c.
Manifold Pressure	4.0" w.c.	10.0" w.c.
Weight	91 lbs.	91 lbs.
Length	10'-3"	10'-3"

ACCESSORIES

Item #	Description	UPC
F102848	Vent Kit-Vertical - 4" (Galvanized)	0830102848-7
F102860	Vent Kit- Horizontal-4" (Stainless Steel)	08930102860-9
10371	24v Thermostat	856795001230
F102859	Decorative Grid Kit	089301003834
F102834	Install Kit (T-stat, Shut-Off Valve, Flex Connector, 1/2" Nipple)	089301028340

MOUNTING CLEARANCE TO COMBUSTIBLES

Top	Bottom	Burner Side	Exhaust Side	Reflector End	Burner End
Horizontal					
6"	54"	24"	24"	6"	24"
Angle (Hung Burner Side UP)					
6"	36"	36"	6"	6"	24"

HIGH INTENSITY INFRARED HEATERS



FEATURES

- Durable - rugged construction
- Instant heat - quiet, clean, odor-free operation
- Maintenance free - no moving parts to service
- CSA certified
- Limited 10-year warranty on burner assembly
- Limited 1-year warranty on gas control
- No direct venting required
- Multiple BTU outputs (conversion orifices included)
- Spark ignition heaters ship with 40VA transformer
- Millivolt (power pile) control heaters ship with thermostat
- Non corrosive materials used throughout construction

CONTROL SYSTEMS

Optional controls available, contact factory for details

Suffix	Description	Gas
SP	Automatic Spark Ignition on pilot with safety burner shutoff, 24VAC control with intermittent pilot. (Pilot is off when heater is off) Transformer 120V/24V shipped loose with heater	NG/LP
PP	Power pile (self-generating) millivolt control. No outside electrical source is required to turn heater on and off. Manually lit pilot. Safety shutoff on pilot and burner. Thermostat shipped loose with heater.	NG/LP



DECORATIVE KITS & ACCESSORIES

Item #	Description
F104440	4000 Series Decorative Grid Kit
F104445	8000 Series Decorative Grid Kit
F114581	Hanging Bracket
17374	Chain Hanging Kit
10371	24V Thermostat (spark only)

4000 SERIES HIGH INTENSITY INFRARED HEATERS

Item #	Model #	BTU/HR	Gas	Control
F140629	HS4040SPNG	40,000	NG	SP
F140626	HS4040PPNG	40,000	NG	PP
F140731	HS4040SPLP	40,000	LP	SP
F140727	HS4040PPLP	40,000	LP	PP

NOTE: ALL 4040 HEATERS COME WITH AN EXTRA ORIFICE TO CONVERT TO 30,000 BTU'S.

8000 SERIES HIGH INTENSITY INFRARED HEATERS

Item #	Model #	BTU/HR	Gas	Control
F180629	HS8060SPNG	60,000	NG	SP
F180626	HS8060PPNG	60,000	NG	PP
F180731	HS8060SPLP	60,000	LP	SP
F180727	HS8060PPLP	60,000	LP	PP

NOTE: ALL 8060 NG HEATERS COME WITH EXTRA ORIFICES TO CONVERT TO 50,000 or 70,000 BTU'S. (70,000 BTU only available in NG)

NOTE: ALL 8060 LP GAS HEATERS COME WITH AN EXTRA ORIFICE TO CONVERT TO 50,000 BTU'S.

9000 SERIES HIGH INTENSITY INFRARED HEATERS

Item #	Model #	BTU/HR	Gas	Control
F191830	HS9100SSPNG	100,000	NG	SP
F191626	HS9100SPPNG	100,000	NG	PP
F191931	HS9100SSPLP	100,000	LP	SP
F191927	HS9100SPPLP	100,000	LP	PP

NOTE: ALL 9000S HEATERS COME WITH EXTRA ORIFICES TO CONVERT TO 80 OR 90,000 BTU'S.

NOTE: ALL 9120NG HEATERS COME WITH EXTRA ORIFICES TO CONVERT TO 100,000 OR 140,000 BTU'S. (140,000 BTU only available in NG)

NOTE: ALL 9120LP HEATERS COME WITH AN EXTRA ORIFICE TO CONVERT TO 100,000 BTU'S.

Item #	Model #	BTU/HR	Gas	Control
F190630	HS9120SPNG	120,000	NG	SP
F190626	HS9120PPNG	120,000	NG	PP
F190731	HS9120SPLP	120,000	LP	SP
F190727	HS9120PPLP	120,000	LP	PP

ARCHITECT COLLECTION

GLASS FRONT

Model #: HSRP37GL Item #: F140200



METAL GRILL FASCIA

Model #: HSRP37MT Item #: F140300



Thermal power	37,000 BTU/Hr
Maximum NG consumption	37 cuft/h
Maximum LP consumption	1.76 lb/h
Heater dimensions	43.11"x12.5"
Heater weight	66 lbs
Number of ceramic plates	6
Maximum electric power absorption	22 [W]
Power supply	120V/60Hz/1 Phase

INCLUDES

- Brackets
- Heat deflector
 - Allows low clearance to ceiling 13"
- On/off remote




FEATURES

- Runs on NG or LP
- Highly efficient, quiet radiant heat
- Compact, minimal design
- No air movement
- Instant heat
- Efficient use of fuel
- Constructed of high quality materials for reliability
- Spark ignition
- Certified

ACCESSORIES

Item #	Description
F140201	Wireless Remote

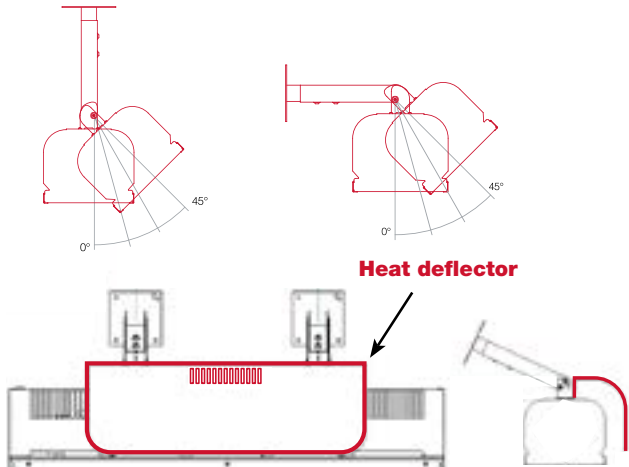

HIGH INTENSITY INFRARED HEATERS



FEATURES

- 30,000 BTU Burner (convertible to 40,000 BTU)
 - Decorative grate protects burners from damage & acts as a wind guard
 - Black, satin gloss painted body and reflectors**
 - Spark ignition
 - 120V 24V / 40VA Transformer included loose in box
 - Mounts horizontal or at 45° angle - mounting brackets included (black)
 - Operates with 24V or 120V thermostats
 - No direct venting required
 - Warranty: pro-rated 3 year (burner assembly), limited 1 year (gas control)
 - Made from corrosion resistant materials – durable, rugged construction
- (Convert 30,000 BTU/HR to 40,000 BTU/HR using optional orifice #05443)

HEATERS

Item #	Model #	BTU/HR	Gas
F140625	HSRR30SPNG	30,000	NG
F140627	HSRR30SPLP	30,000	LP

CONVERSION KIT

Item #	Description
05443	Converts all 30,000 BTU/HR to 40,000 BTU/HR

GARAGE/WORKSHOP HEATERS



FEATURES

- Economical - no electricity required
- Convenient - easy to operate and install
- Maintenance free - no moving parts to service
- Limited 5-Year warranty on burner
- Limited 1-Year warranty on gas control
- Quiet, clean, odor-free operation
- Includes thermostat
- CSA certified

USES

- Garages/Workshops
- Barns/Utility/Storage Sheds
- Animal Pens/Stalls
- Loading Docks
- Building Construction Sites
- Doorways/Ramps for Snow Prevention

HEATERS

Item #	Model #	BTU/HR	Gas
F125444	H25N	25,000	NG
F125545	H22L	22,000	LP



RADIANT CABINET HEATERS



MR.HEATER®

Model #: MH18CH

Item #: F227500

FEATURES



6,000 - 12,000 - 18,000 BTU



Heats up to 450 sq. ft.



Runs up to 72 hours on one 20 lb. propane tank

- Ideal for restaurant patio seating
- Lower cost than heating towers
- Low/medium/high heat settings
- 20 lb. propane tank mounts inside unit for easy portability
- Hose and regulator included
- Tip-over safety shut-off switch
- Automatic low oxygen depletion shut-off system (ODS)
- Rugged steel construction
- Lockable casters

**7000 ft. high altitude restriction*

GAS UNIT HEATERS

HEATSTAR® UTILITY HEATERS



**30,000 BTU Utility Heater Shown*



50,000 BTU Utility Heater Shown

EXPEDITER™ Mounting Bracket Included



**80,000 BTU Utility Heater Shown*

EXPEDITER™ Mounting Bracket Included



**100,000 Btu Utility Heater Shown*



**125,000 BTU Utility Heater Shown*

EXPEDITER™ Mounting Bracket Included



HEATSTAR® UTILITY HEATERS

Designed for use in spaces adjacent to a residence. These heaters use a finer mesh fan guard and utility grade safety switches to meet the CSA Utility Heater standard.

FEATURES

- Power exhaust allows for vertical or horizontal venting (sold separately)
- 80% thermal efficiency
- Designed for right or left side venting
- Easy outside access for thermostat connections
- Set up for natural gas; includes LP conversion kit
- 24V thermostat (F200042) sold separately
- Finger proof fan guard
- High velocity fan
- 115 V AC required
- Spark ignition features self-diagnostic control mode
- Aluminized tubular heat exchanged for maximum efficiency and longer life

NEW! EXPEDITER™ Mounting Bracket

- Easy and Quick Installation
- No joist modifications— accommodates multiple connection points across varying widths
- Compatible with ALL Heatstar® unit heater models
- 3-point pivot ceiling mount
- Carbon Steel
- Durable Powder Coat finish



F160242

** Mounting Bracket included with models HSU50NG, HSU80NG, and HSU125NG.*



CSA Certified

UTILITY HEATER SPECIFICATIONS

Item Number	Model Number	Output (BTU/HR)	Input (BTU/HR)	Heating Area	Flue Size	V / A / H Phase	Motor HP	Motor RPM	Shipping Weight	Unit Dimensions W x H x D	Mounting Bracket
F160531	HSU30NG	24,600	30,000	1,025 sq. ft.	4"	120 / 2.3 / 1	1/20	1,650	65 lbs.	25.0" x 12.0" x 24.0"	Not Included
F170751	HSU50NG	40,000	50,000	1,667 sq. ft.	4"	120 / 2.3 / 1	1/20	1,650	79.1 lbs.	25.0" x 12.0" x 24.0"	Included
F170761	HSU80NG	64,000	80,000	2,667 sq. ft.	4"	120 / 2.3 / 1	1/10	1,050	97 lbs.	25.0" x 17.0" x 25.0"	Included
F160489	HSU100NG	80,000	100,000	3,333 sq. ft.	4"	120 / 2.3 / 1	1/3	1,050		25.0" X 26.5" X 24.6"	Not Included
F160491	HSU125NG	100,000	125,000	4,167 sq. ft.	4"	120 / 3 / 1	1/3	1,050	128 lbs.	25.0" x 24.6" x 26.5"	Included

** Additional conversion kits available for purchase (see accessories below)*

Please note: unit dimensions and weights are subject to change

HEATSTAR® UTILITY HEATER ACCESSORIES

Item Number	Description
F200029	Optional vent kit for vertical venting, 4 inch diameter
F102864	Optional vent kit for vertical venting, 6 inch diameter
F200030	Optional vent kit for horizontal venting/stainless steel, 4 inch diameter
F102863	Optional vent kit for horizontal venting/stainless steel, 6 inch diameter
F260164	Fuel conversion kit - converts utility heater from propane to natural gas
F260163	Fuel conversion kit - converts utility heater from natural gas to propane
F200042	24-volt thermostat
F160242	Expediter™ Mounting Bracket

The accessories listed above do not apply to power vented and separated combustion units on page 13

HEATSTAR® POWER VENTED & SEPARATED COMBUSTION UNIT HEATERS




FEATURES

- Standard or separated combustion units
- Powder coated cabinet
- 82% thermal efficiency
- Air louvers with 3 locking positions
- All models ship equipped for natural gas (*LP conversion kit sold separately*)
- Easily installs using 3/8"-16 threaded rods (*sold separately*)
- Limited 3 year warranty on parts
(*limited to 1 year in high humidity or caustic environments*)
- Limited warranty on aluminized steel heat exchanger: 10 years
(*limited to 5 years when installed in corrosive environments*)
- Limited warranty on stainless steel heat exchanger: 10 years



HEATSTAR® STANDARD COMBUSTION UNIT HEATERS

Designed to use fresh air for combustion instead of indoor air. These heaters can also operate with a vent pipe only, in standard combustion mode, by pulling in fresh air directly from the room.

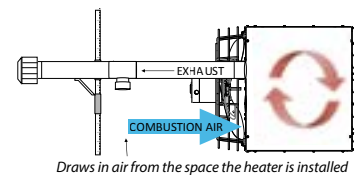


STANDARD COMBUSTION UNIT HEATER SPECIFICATIONS

Item Number	Model Number	Output (BTU/HR)	Input (BTU/HR)	Heating Area	Flue Size	V / A / H Phase	Motor HP	Motor RPM	Shipping Weight	Unit Dimensions W x H x D	LP Conversion Kit (sold separately)
ALUMINIZED STEEL HEAT EXCHANGER <i>*(125,000 BTU model is available by special order only)</i>											
F163062	HSU150NGPALP	123,000	150,000	5,000 sq. ft.	4"	115 / 5 / 1	1/6	1,050	170 lbs.	33.5" x 23.5" x 33.0"	F163070
F163063	HSU200NGPALP	164,000	200,000	6,700 sq. ft.	4"	115 / 7 / 1	1/3	1,140	212 lbs.	40.5" x 26.3" x 35.0"	F163071
F163064	HSU250NGPALP	205,000	250,000	8,400 sq. ft.	6"	115 / 7 / 1	1/3	1,140	244 lbs.	40.5" x 29.0" x 35.0"	F163072
F163065	HSU300NGPALP	246,000	300,000	10,000 sq. ft.	6"	115 / 10 / 1	1/2	1,130	264 lbs.	40.5" x 31.8" x 35.8"	F163073
F163066	HSU400NGPALP	328,000	400,000	13,400 sq. ft.	6"	115 / 12 / 1	3/4	1,125	341 lbs.	40.5" x 40.0" x 36.3	F163073
STAINLESS STEEL HEAT EXCHANGER <i>*(100,000, 125,000 and 150,000 BTU models are available by special order only)</i>											
F163053	HSU200NGPSSP	164,000	200,000	6,700 sq. ft.	4"	115 / 7 / 1	1/3	1,140	212 lbs.	40.5" x 26.3" x 35.0"	F163071
F163054	HSU250NGPSSP	205,000	250,000	8,400 sq. ft.	6"	115 / 7 / 1	1/3	1,140	244 lbs.	40.5" x 29.0" x 35.0"	F163072
F163055	HSU300NGPSSP	246,000	300,000	10,000 sq. ft.	6"	115 / 10 / 1	1/2	1,130	264 lbs.	40.5" x 31.8" x 35.8"	F163073
F163056	HSU400NGPSSP	328,000	400,000	13,400 sq. ft.	6"	115 / 12 / 1	3/4	1,125	341 lbs.	40.5" x 40.0" x 36.3	F163073

HEATSTAR® SEPARATED COMBUSTION UNIT HEATERS

The fan pulls fresh air into the combustion chamber from the room air. The power vent system quickly and efficiently exhausts flue gases from the unit heater to the outdoors through a single vent pipe, minimizing installation labor.

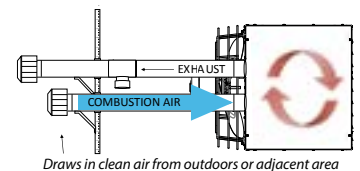

UNIT HEATER SPECIFICATIONS

Item Number	Model Number	Output (BTU/HR)	Input (BTU/HR)	Heating Area	Flue Size	V / A / H Phase	Motor HP	Motor RPM	Shipping Weight	Unit Dimensions W x H x D	LP Conversion Kit (sold separately)
ALUMINIZED STEEL HEAT EXCHANGER											
F163042	HSU150NGPAL	123,000	150,000	5,000 sq. ft.	4"	115 / 5 / 1	1/6	1,050	170 lbs.	33.5" x 23.5" x 33.0"	F163070
F163043	HSU200NGPAL	164,000	200,000	6,700 sq. ft.	4"	115 / 7 / 1	1/3	1,140	212 lbs.	40.5" x 26.3" x 35.0"	F163071
F163044	HSU250NGPAL	205,000	250,000	8,400 sq. ft.	6"	115 / 7 / 1	1/3	1,140	244 lbs.	40.5" x 29.0" x 35.0"	F163072
F163045	HSU300NGPAL	246,000	300,000	10,000 sq. ft.	6"	115 / 10 / 1	1/2	1,130	264 lbs.	40.5" x 31.8" x 35.8"	F163073
F163046	HSU400NGPAL	328,000	400,000	13,400 sq. ft.	6"	115 / 12 / 1	3/4	1,125	341 lbs.	40.5" x 40.0" x 36.3	F163073
STAINLESS STEEL HEAT EXCHANGER <i>*(100,000, 125,000 and 150,000 BTU models are available by special order only)</i>											
F163033	HSU200NGPSS	164,000	200,000	6,700 sq. ft.	4"	115 / 7 / 1	1/3	1,140	212 lbs.	40.5" x 26.3" x 35.0"	F163071
F163034	HSU250NGPSS	205,000	250,000	8,400 sq. ft.	6"	115 / 7 / 1	1/3	1,140	244 lbs.	40.5" x 29.0" x 35.0"	F163072
F163035	HSU300NGPSS	246,000	300,000	10,000 sq. ft.	6"	115 / 10 / 1	1/2	1,130	264 lbs.	40.5" x 31.8" x 35.8"	F163073
F163036	HSU400NGPSS	328,000	400,000	13,400 sq. ft.	6"	115 / 12 / 1	3/4	1,125	341 lbs.	40.5" x 40.0" x 36.3	F163073

Please note: all unit dimensions and weights are subject to change

NOMAD

FEATURES

- Whisper Quite Operation
- Multi-Rate Heat Settings - High/Low
- Higher CFM
- Easy Reset High Limit Switch
- Choose Rate and Fuel with Flip of a Switch
- Flexible Diffuser Connector System
- Certified




DUAL FUEL (NG/LP)

Item #	Model #	BTU/HR NG	BTU/HR LP
F109100	HS115TC	108,000	111,000
F109110	HS190TC	184,000	190,000
F109120	HS250TC	250,000	250,000

SINGLE FUEL (LP)

Item #	Model #	BTU/HR LP
F109200	HS115SF	111,000
F109210	HS190SF	190,000
F109220	HS250SF	250,000

Item #	Diffuser Kits	Description
F109105	Diffuser kit for HS115TC (SF)	12" diameter diffuser
F109115	Diffuser kit for HS190TC (SF) or HS250TC (SF)	16" diameter diffuser
Adapter Rings		
F109106	Duct adapter ring for HS115TC (SF)	12" diameter connector ring
F109116	Duct adapter ring for HS190TC (SF) or HS250TC (SF)	16" diameter connector ring
Ducts		
F109107	Short duct for HS115TC (SF)	30" siliconized flex duct, 12" diameter
F109117	Short duct for HS190TC (SF) or HS250TC (SF)	30" siliconized flex duct, 16" diameter
F109108	Long duct for HS115TC (SF)	10' siliconized flex duct, 12" diameter
F109118	Long duct for HS190TC (SF) or HS250TC (SF)	10' siliconized flex duct, 16" diameter
Storage		
F109119	Painted steel storage box optional for HS190TC (SF)/HS250TC (SF)	31 1/4" x 20 1/4"x 10" box with lock hasp



INDIRECT-FIRED SERIES HEATERS



HS1000ID



HS2000ID



HS3000ID

**KEROSENE
JP8 (JET A FUEL)
#1 & 2 DIESEL FUEL
#1 & 2 FUEL OIL**

Item #	Model #	BTU/HR	FUEL
F151010	HSP100ID	110,000	Kerosene
F151020	HSP200ID	205,000	Kerosene
F151030	HSP300ID	300,000	Kerosene

*Ducts, adapters, diffusers, and thermostats sold separately.



HSBG350ID



HSBG500ID



Item #	Model #	BTU/HR	FUEL
F151358	HSBG350ID	350,000	Kerosene
F151558	HSBG500ID	500,000	Kerosene

*Ducts, adapters, diffusers, and thermostats sold separately.

Item #	Description
F105198	100 Gallon Fuel Tank for HSP500ID-A

DIRECT-FIRED PRO SERIES HEATERS



HS3500DF



HS6000DF



HS4000NG/LP

Item #	Model #	BTU/HR	FUEL
F151089	HS3500DF	360,000	Kerosene
F151100	HS6000DF	610,000	Kerosene
F151200	HS4000NG/LP	400,000	NG/LP



FORCED AIR PROPANE/KEROSENE HEATERS

FORCED AIR PROPANE



Item #	Model #	BTU/HR
F105505	HS35FA	35,000
F105507	HS85QFAV	50,000 - 85,000
F105508	HS125QFAV	75,000 - 125,000
F105509	HS170QFAVT	125,000 - 170,000
F105510	HS400FAVT	250,000 - 400,000

FEATURES

- Quiet Burner Technology® – 50% quieter than competitive designs
- 20' hose & regulator included
- Operates on propane

FORCED AIR NATURAL GAS



Item #	Model #	BTU/HR
F105511	HS170NG	150,000

FORCED AIR KEROSENE HEATERS



Item #	Model #	BTU/HR
F105500	HS50K	50,000
F105501	HS80KT	80,000
F105502	HS140KT	140,000
F105503	HS185KT	185,000
F105504	HS210KT	210,000

FEATURES

- Runs on diesel, kerosene, jet fuel & fuel oil
- Industry's best cold weather starting capability
- Heavy-duty flat-free tires with steel bearings
- High powered fan & motor design
- Continuous ignition system
- Illuminated on/off switch

NEW STACKABLE DESIGN



OIL-FIRED RADIANT HEATERS



OIL-FIRED

Item #	Model #	BTU/HR
F105155	HSP60R	58,000
F105159	HSP125R	125,000
F105160	HSP150R	102,000/146,900

CONVECTION JOB-SITE HEATERS



Item #	Model #	BTU/HR
F170470	HS80CVX	30,000 - 80,000 (LP)
F170473	HS100CVNG	50,000 - 100,000 (NG)
F170475	HS200CVX	75,000 - 200,000 (LP)

PORTABLE RADIANT HEATERS



PROPANE

Item #	Model #	BTU/HR
F170700	HS35LP	35,000



PROPANE / NATURAL GAS

Item #	Model #	BTU/HR
F170800	HS125LP	125,000
F170850	HS125NG	125,000

DEWALT® JOB-SITE HEATERS

CORDLESS FORCED AIR PROPANE



HYBRID TECHNOLOGY:
Runs cordless using DEWALT battery or plugged in to DC outlet.

DeWalt® Cordless heaters work with all 20V Max® & FlexVolt® batteries. *Battery and charger sold separate.*



Stock #	Model #	BTU/HR	Gas Hose
F340661	DXH70CFAV	27,000 - 68,000	10'
F340662	DXH70CFAV (Canada only)	27,000 - 68,000	15'

FORCED AIR PROPANE, DIRECT FIRED



All DeWalt® Forced Air Propane Heaters come standard with Quiet Burner Technology® making them 50% quieter than standard forced air propane heaters.



Stock #	Model #	BTU/HR
F340705	DXH40FA	40,000
F340710	DXH65FAV	35,000 - 65,000
F340715	DXH90FAV	50,000 - 90,000
F340720	DXH125FAV	10,000 - 125,000
F340725	DXH150FAV	100,000 - 150,000
F340730	DXH170FAVT	125,000 - 170,000
F340735	DXH210FAVT	160,000 - 210,000

PORTABLE RADIANT HEATER



Stock #	Model #	BTU/HR
F332000	DXH12B	9,000 / 12,000



RADIANT JOB-SITE HEATER



Stock #	Model #	BTU/HR
F340620	DXH45LP	45,000

HEAVY-DUTY ELECTRIC HEATERS



Stock #	Model #	BTU/HR	Volt
F340635	DXH165	5,630	120V (Single Phase)
F340640	DXH330	11,260	240V (Single Phase)
F340645	DXH1000TS	23,884 (Lo) 34,121 (Hi)	240V (Single Phase)
F340650 (Cart incl.)	DXH2000TS	44,357 (Lo) 68,242 (Hi)	240V (Single Phase)
F340655 (Cart incl.)	DXH20003TS	44,357 (Lo) 68,242 (Hi)	240V (Three Phase)

FORCED AIR KEROSENE, DIRECT FIRED



Stock #	Model #	BTU/HR
F340670	DXH50K	50,000
F340675	DXH75KT	75,000
F340680	DXH135KT	135,000
F340685	DXH185KT	185,000
F340690	DXH135HD	135,000
F340695	DXH190HD	190,000
F340700	DXH215HD	215,000

PORTABLE PROPANE BUDDY HEATERS



Model #	MH4B	MH9BX	MH12HB	MH18B	MH18B	VMH11BFLEX	MH8CFLEX
Item #	F215100	F232000	F232035	F274800	F274805	F600100	F600500
BTU	3,800	4,000/9,000	6,000/12,000	4,000/9,000/ 18,000	4,000/9,000 18,000	6,000-11,000	4,000-8,000

HEATER FEATURES

- Indoor safe
(Certified outdoor use only in Massachusetts/Canada)
- Tip-over safety shut-off
- Automatic low oxygen depletion shut-off system (ODS)
- Portable radiant heat
- Certified

COMMON USES

- Ice Fishing
- Hunting
- Camping
- Workshop
- Outdoor sports

COOKER FEATURES

- Runs up to 2.75 hours on high
- High performance radiant fiber mesh
- Integrated electronic ignition
- 28" quick-connect hose included
- Used with the BuddyFlex® heater



Buddy RED is recognized worldwide for comfortable, safe, portable heat.



Model #	MHBE150FAT	MHBEW150FATRW	MHE150FAT
Item #	F236300	F236330	F236200
Volts/Watts	120v/1500W	120v/1500W	120v/1500W
Cord Wrap Storage	Yes	Yes	No
Cord Length	6 Feet	6 Feet	6 Feet
Tip-Over Safety Switch	Yes	Yes	Yes
Overheat Protection	Yes	Yes	Yes
Warranty	1 Year	1 Year	1 Year

PORTABLE ELECTRIC BUDDY™ FEATURES

- Fold down handle
- Ceramic heating element
- 2 heat settings: low/high
- Fan only setting
- Adjustable thermostat

WALL MOUNT ELECTRIC BUDDY™ FEATURES

- Wi-Fi/Bluetooth enabled via app and common smart home devices
- Control the heater via touch screen control panel, remote, or smart home app
- Infrared heating element
- 3 heat settings: eco/low/high
- Adjustable thermostat with 12H timer
- Fan-forced for wide heat distribution

PORTABLE ELECTRIC HEATER FEATURES

- Instant, whisper quiet heat
- Thermostatically controlled
- 2 heat settings: low/high
- Fan only option
- Integrated handle for easy portability

REFILLABLE PROPANE TANK



ITEM #: F200048

FEATURES

- Refill, reuse, save money
- Complete fill in approx. 60 seconds
- Helps to reduce waste
- Easy to use
- Can only be used with Fuel Keg Refill Valve Assembly (The Tap)



CERTIFICATIONS: DOT 4 BA | UL 1769 | CGA 1.1

PROPANE TANK REFILL KIT



ITEM #: F200049

“THE TAP” REFILL VALVE ASSEMBLY

- No small tools to lose
- No small parts to strip out or damage
- Connects 1-lb refillable tank to 20-lb cylinder
- Can only be used with Fuel Keg Refillable Propane Tank



MULTI-USE TANK FEET

- 3 tank feet included in each kit
- Attach to the safety collar on the top of the cylinder for the refill process or attach to the bottom of the cylinder for increased stability when not in use
- Raises the tank only as much as the user needs to open the valve



QUARTER PALLET DISPLAYER



ITEM #: F200062

FEATURES

- Provides enhanced visibility
- Compact and designed to make the most efficient use of space
- Easy to assemble and transport
- Holds 36 Fuel Keg Refillable Propane Tanks (3 master packs of 12 tanks)
- Holds 8 Fuel Keg Propane Tank Refill Kits (Master pack is a pack of 6 kits)

PORTABLE PROPANE TANK TOP HEATERS

TANK TOP HEATERS





MH15T



MH30T



MH45T



MH540

Item #	Model #	BTU/HR
F242100	MH15T	10,000-15,000
F242650	MH30T	10,000-30,000
F242915	MH45T	10,000-45,000
F242540	MH540	48,000

TANK TOP HEATER/COOKER





Item #	Model #	BTU/HR
F242300	MH15C	10,000/12,500/15,000

GOLF CART HEATER





Item #	Model #	BTU/HR
F242010	MH4GC	4,000

WARMING PRODUCTS



HAND WARMERS

Item #	Description	UPC
F235011	Hand Warmers 40 individual pair per display box	08930100206-7
F235012	Hand Warmers 12 - 10 pk per display box	08930100234-0

XL WARMERS

Item #	Description	UPC
F235076	XL Warmers 40 individual pair per display box	08930100208-1
F235077	XL Warmers 12 - 10 pk per display box	08930100236-4

TOE WARMERS

Item #	Description	UPC
F235051	Toe Warmers 30 individual pair display box	08930100207-4
F235052	Toe Warmers 15 - 8 pk per display box	08930100235-7

FULL FOOT WARMERS

Item #	Description	UPC
F235091	Full Foot Warmers 30 individual pair pk per display box	08930100249-4

SEAT CUSHION & WARMER

Item #	Description	UPC
F235041	Seat Warmer 12 individual warmers per display box	08930100510-5
F235001	Portable Seat Cushion with Seat Warmer Insert	08930100511-2



PORTABLE PROPANE STOVES



Item #	Description
F235825	Single Burner Angle Iron Stove
F235830	Double Burner Angle Iron Stove
F235835	Triple Burner Angle Iron Stove
F173071	5' Propane Hose Assembly
F173072	12' Propane Hose Assembly



PORTABLE PROPANE TORCHES



Item #	Model #	BTU/HR	Ignition
F272601	MH400PT	400,000	Striker
F272602	MH500LPT	500,000	Striker



- Needle valve adjustment
- Excess flow P.O.L. fitting
- 10' hose included
- Bulk display cartons
- CSA certified

BULK HOSES, FITTINGS, & REGULATORS

ENERCO® FITTINGS & ACCESSORIES

ITEM #	DESCRIPTION
16671-20	20ft Propane 1/4in ID Hose Assembly (1/4in Female Pipe x 1/4in Male pipe) Bulk
71120	40' - 3/8" Female Flare x 3/8" Male Pipe, 3/8" ID
71138-XX	Acme Nut x 1/4" Male Pipe, 1/4" ID
	(Available in 8", 12", 15", 20", and 36")
71139-XX	9/16" Left Hand Female Swivel x 9/16" Left Hand Female Swivel, 3/8" ID
	(Available in 180", 300")
71140-900	75' - 3/8" Female Flare x 9/16" Left Handed Female Swivel, 3/8" ID
71142-XX	Flexible Hose Pigtail - 1/4" Inverted Male Flare x Full Flow P.O.L. with Handwheel, 1/4" ID
	(Available in 15", 20", 24", 30", 36", 48", and 60")
71144-XX	Excess Flow Soft Nose P.O.L. x 1/4" Inverted Male Flare, 1/4" ID
	(Available in 12", 15", 18", 20", 24", 30", 36", 48", 60", 72", 120", and 144")
71149-XX	3/8" Female Flare x 3/8" Female Flare, 1/4" ID
	(Available in 12", 24", 36", 48", 60", 72", 96", 108", 120", 144", 180", 240", and 600")
71156-XX	Soft Nose P.O.L. x 1/4" Male Pipe, 1/4" ID
	(Available in 18")
71158-XX	Green Acme Nut x 1/4" Male Inverted Flare, 1/4" ID
	(Available in 12", 15", 18", 20", 24", 30", 36", 48", 60", and 144")
71161	22" Replacement Barbeque Hose & Regulator for Type 1 (QCC-1) Gas Grill Systems
	3/8" Female Flare x 90° Regulator with Appliance End Fitting
71161-XX	Replacement Barbeque Hose & Regulator for Type 1 (QCC-1) Gas Grill Systems
	3/8" Female Flare x 90° Regulator with Appliance End Fitting (Available in 60" and 144")
71163-XX	3/8" Female Flare x 3/8" Male Pipe, 1/4" ID
	(Available in 24", 30", 36", 48", 60", 72", 96", 120", 144", and 180")
71169-XX	3/8" Female Flare x 3/8" Female Flare, 3/8" ID
	Available in 12", 18", 24", 36", 48", 60", 72", 84", 96", 108", 120", 132", 144", 180", 240", 300", 360", 600", and 1200"
71170-XX	3/8" Male Pipe Thread x 3/8" Male Pipe Thread, 3/8" ID
	(Available in 600" and 1200")
71180-XX	3' High Pressure Hose - 3/8" Female Flare x 1/4" Male Pipe, 3/8" ID
	(Available in 36")
71473-XX	30" - 1/2" Female Flare x 3/8" Male Pipe, 1/4" ID
	(Available in 40", 48", 60", and 72")
71474	15' High Pressure Appliance Extension Hose - 1/4" Male Pipe x 1/4" Female Pipe, 1/4" ID
71477	12' High Pressure Hose - 1/4" Female Pipe x Excess Flow P.O.L., 1/4" ID
71802	12' Big/Tough Buddy RV Hose - 3/8" Quick Connect x 3/8" Female Flare, 1/4" ID
71803	12' Big/Tough Buddy Hose & Regulator - 3/8" Quick Connect x Regulator with Acme Nut, 1/4" ID

ITEM #	DESCRIPTION
71806	12' - 1/4" ID Hose - 1/4" Female Quick Connect x 1/4" Male Quick Connect, 1/4" ID
71807	12' - 1/4" ID Hose - 1/4" Female Quick Connect x 1/4" Male Quick Connect, 1/4" ID
73061-XX	1/4" ID Hose - 3/8" Female Flare x 3/8" Male Quick Connect
	(Available in 96" and 144")
73071-XX	Hose & Regulator - Regulator with Soft Nose P.O.L. & Handwheel x 3/8" Female Flare, 1/4" ID
	(Available in 72" and 96")
73072	12' Hose & Regulator - Regulator with Soft Nose P.O.L. & Handwheel x 3/8" Female Flare, 1/4" ID
73073	5' Hose & Regulator with Appliance End Fitting for Type 1 (QCC-1) Gas Grill Systems 3/8" Female Flare x 90° Regulator with Appliance End Fitting, 1/4" ID
73075-XX	3/8" Female Flare x Restricted Flow Soft Nose POL - 90° regulator, 1/4" ID
	(Available in 72" and 96")
73655	Excess Flow Soft Nose POL x 1/4" Male Pipe Bulk
73701	5' - Soft Nose Excess Flow P.O.L. with Handwheel x Swivel 1"-20 Male Throwaway Cylinder Thread
73702	12' - Soft Nose Excess Flow P.O.L. with Handwheel x Swivel 1"-20 Male Throwaway Cylinder Thread
73703-XX	Acme Nut x 1"-20 Male Throwaway Cylinder Thread
	(Available in 60" and 144")
73704	10' - 1/4" ID, Swivel 1"-20 Male Throwaway Cylinder Thread
73705	2' - 1/4" ID Hose - Swivel 1"-20 Female disposable Cylinder x 1" - 20 Male disposable Cylinder
73707	5' - 1/4" Male Pipe x 3/8" Female Flare
73710	5' - Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1"-20 Female Throwaway Cylinder Thread
73711	12' - Swivel 1"-20 Male Throwaway Cylinder Thread x Swivel 1"-20 Female Throwaway Cylinder Thread
73716	22" - 3/8" Male Pipe x 3/8" Female Flare (same hose as 71163)
73717-XX	1/4" Female Pipe x 1/4" Male Pipe
	(Available in 60")
73718	8' - Acme Nut with Propane Gauge x 1"-20 Male Throwaway Cylinder Thread
73726	3' - 3/8" Female Flare x 1/2" Female Flare
73720P	12' Natural Gas Patio Hose - 3/8" Male Flare x 3/8" Male Pipe
76124	5' - 3/8" Female Pipe x 3/8" Male Pipe, 1/4" ID
76125	12' - 3/8" Male Pipe x 3/8" Female Pipe, 1/4" ID
76148	5' Appliance Extension Hose Assembly - 9/16" Left Hand Female Thread x 9/16" Left Hand Female Thread
76149	12' Appliance Extension Hose Assembly - 9/16" Left Hand Female Thread x 9/16" Left Hand Female Thread
71714	"Y" Block - All ends 1/4" Female Pipe
71715P	Male "Y" Adaptor with Handwheel - 2 ends 1"-20 Male Disposable Cylinder Threads x Soft Nose P.O.L.
71735P	Female "Y" Adapter with Handwheel - 2 ends 7/8" Female Soft Nose P.O.L.'s x Soft Nose P.O.L.

When ordering above listed hose assemblies, please use item number shown then a dash with the two digit size (XX) marked after the dash in inches. Examples: 71163-XX will be 71163-12. This is a 12 inch 71163 hose assembly. 71163-XX will be 71163-15. This is a 15 inch 71163 hose assembly. Check with local rep or Enerco Factory consultant for custom sizes and other offerings.

ITEM #	DESCRIPTION
72776	Two Stage Automatic Changeover Regulator - 2 ends 1/4" Inverted Female Flares (Inlets) x 3/8" Female Pipe (Outlet)
72846	Auto-Change High Capacity Two Stage Regulator (Top View Indicator) - 2 ends 1/4" Inverted Female Flare (Inlets) x 3/8" Female Pipe (Outlet)
73690	3/8" Female Pipe Thread x Male Plug (Use with 73691)
73691	3/8" Female Pipe Socket for 73720 & 73721 (Use with 73690)
73693	Dust Cap for Natural Gas Hose (73720 & 73721)
73694	Dust Plug for Natural Gas Hose (73720 & 73721)
73699	Fuel Filter For Buddy, Big Buddy and Tough Buddy Heaters
73719	High Pressure Regulator with Range of 0-60 P.S.I. - Soft Nose P.O.L. x 1/4" Female Pipe
73729	1/4" Male Pipe x 1/4" Inverted Female Flare
73751P	Adapter Tee - Soft Nose P.O.L. x 1"-20 Disposable Cylinder Thread x Female Soft Nose P.O.L.
73752	Adapter Tee - P.O.L. x 1"-20 Disposable Cylinder Thread x Female P.O.L.
73753	90° Stay Flow Adapter - Excess Flow Soft Nose P.O.L. x 1"-20 Male Disposable Cylinder Thread x Female P.O.L. & Acme Thread
73754	Disposable Cylinder Adapter - 1/4" Male Pipe x 1"-20 Male Disposable Cylinder Thread
73755	Disposable Cylinder Adapter - 1/4" Male Pipe x 1"-20 Female Disposable Cylinder Thread
73756	1/4" Male Pipe x Soft Nose P.O.L. with Handwheel
73758	Bulk Cylinder Adapter with Handwheel - 1"-20 Male Disposable Cylinder Thread x Soft Nose P.O.L. with Handwheel
73759	90° Low Pressure Regulator - 3/8" Female Pipe x Soft Nose P.O.L.
73760	90° Elbow - Soft Nose P.O.L. x 1"-20 Male Disposable Cylinder Thread
73761	90° Low Pressure Regulator with Appliance End Fitting for Type 1 (QCC-1) Gas Grill Systems
73762	1/4" Male Pipe x Full Flow Soft Nose P.O.L. with Handwheel
73763	Two Stage Regulator "6 o'clock vent" (VERTICAL APPLICATION) - 1/4" Female Pipe (Inlet) x 3/8" Female Pipe (Outlet)
73767	Low Pressure Regulator - 1/4" Female Pipe x 3/8" Female Pipe
73769	Portable Tabletop Regulator - Orifice x 1"-20 Female Disposable Cylinder Thread
73783	Plastic Handwheel for Soft Nose P.O.L.'s
73786	"O" Ring - 3/8" ID x 1/2" OD
73791	Female P.O.L. with Acme Thread x 1/4" Male Pipe
73827	Two Stage Regulator "9 o'clock vent" (HORIZONTAL APPLICATION) - 1/4" Female Pipe (Inlet) x 3/8" Female Pipe (Outlet)
73831	High Pressure Regulator (30 psi) - 1/4" Female Pipe x 1/4" Female Pipe
75217	Plastic Stand for 16.4 oz. & 14.3 oz. Disposable Propane Cylinders
76129	Soft Nose P.O.L. with Restricted Flow - 9/16" Left Hand Male Thread x Soft Nose P.O.L.
76130	9/16" Left Hand Male Pipe x 1"-20 Disposable Cylinder Thread w/ Shut-off
76132	Bulk Cylinder Adapter - 1"-20 Disposable Cylinder Thread x Soft Nose P.O.L.
76133	Bulk Adapter with Acme Nut- Acme Nut x 1"-20 Male Disposable Cylinder Thread
76134	Tee Connector - All ends 1/4" Female Pipe
76136	Low Pressure Regulator - 3/8" Female Pipe Thread x Soft Nose P.O.L.
76137	Cross Connector - All ends 1/4" Female Pipe

ITEM #	DESCRIPTION
76139	Pigtail - 1/4" Male Pipe x Soft Nose P.O.L.
76140	1"-20 Disposable Cylinder Thread x 1/4" Female Pipe Thread
76145	Tee Connector - All ends 3/8"
76152	1/4" Male Pipe Thread x 9/16" Left Hand Male Thread
76153	3/8" Male Pipe Thread x 9/16" Left Hand Male Thread
76154	9/16" Left Hand Male Thread x 9/16" Left Hand Male Thread
76157	3/8" x 3/8" Hex Pipe
76171	Propane Grill Steak Saver Adapter - Female Disposable Cylinder Thread x Female P.O.L. & QCC-1
76172	Propane Tank Refill Adapter - Female Disposable Cylinder Thread x P.O.L.
76186	1/4" Propane or Natural Gas Quick Connector & Excess Flow Protection Plug - 1/4" Male Pipe x 1/4" Female Pipe
76187	3/8" Gas Quick Connector - 3/8" Male Pipe x 3/8" Female Pipe
76190	1/4" Propane or Natural Gas Quick Connector & Full Flow Plug - 1/4" Male Pipe x 1/4" Female Pipe
76253	90° Swivel Elbow - 3/8" Swivel Female Flare x 3/8" Male Flare
76262	3/8" Male Pipe x 3/8" Male Flare
76280	Gas Mate II Quick Connector - 1/4" Female Pipe x Quick Connect (Use with 76281 & 76328)
76281	Gas Mate II Full Flow Plug - 1/4" Male Pipe x Male Plug *For appliances over 80,000 BTU's (Use with 76280, 76334)
76284W	Full Flow Plug - 1/4" Male Pipe Thread x Male Plug (Use with 76290W)
76290D	Gas Mate II Quick Connector with Shut-off Valve - Quick Connect x 1/4" Female Pipe (Use with 76284W)
76328	Gas Mate II Male Plug (Regulator Side) - 1/4" MPT x Male *For appliances under 80,000 BTU's (Use with 76280, 76334)
76329	Gas Mate II Fill Plug - 7/8" Female Soft Nose P.O.L. x Male Plug
76372	Dust Cap for 73791 or any Acme (QCC-1) Fitting
76378	Gas Mate II Mini Kit - Quick Connect x Soft Nose P.O.L. *Tank side Adapter only (bagged) with instructions (cylinder valve side)
76380	Dust Plug-Gase Mate II
76495	Appliance End Fitting for Type 1 (QCC-1) Gas Grill Systems (75,000 BTU Capacity) - Acme Plastic Nut x 1/4" Male Pipe
76497	Appliance End Fitting for RV & Camping Systems (200,000 BTU Capacity) - Acme Plastic Nut x 1/4" Male Pipe

BULK HOSES, FITTINGS, & REGULATORS

ENERCO® LPG REELS, FITTINGS, & COUPLINGS

HIGH PRESSURE LP GAS HOSE REELS

ITEM #	ID	OD	PSI	Weight (per FT)	PKG QTY
76208	1/4"	0.505"	350	.078 lbs	500'
76209	5/16"	0.56"	350	.099 lbs	500'
76210	3/8"	0.65"	350	.119 lbs	500'
76211	1/2"	0.79"	350	0.17 lbs	500'

Largest Domestic Manufacturer of L.P. Gas Hose.
L.P. Gas Hose for Outdoor Cooking, RV's and Heating Appliances.
Available in Bulk, Finished Hose Assemblies, or Cut-Lengths.

Recognized by UL-569, UL-21, and CSA 1-8.3.

- 1/4", 5/16", 3/8" I.D. High Pressure Hose
Applications: Outdoor Gas Grills, RV Hose, Turkey Fryers, Fish Cookers, Torches, Patio and Portable Heaters.
- 1/2" I.D. Heavy Duty High Pressure Hose
Applications: Heater Connectors, RV Trunk Line Connections, Large Volume LPG Generators, Construction Heaters, Temporary Supply Connectors, On-Site Incinerators, Hot Tar Roofing Kettle Supply, and Delivery Hoses.
- 1lb custom order hoses available

BARB x FLARE FITTINGS

ITEM #	ID	DESCRIPTION
76224	1/4"	Barb 1/4" ID x 1/4" FFS
76225	1/4"	Barb 1/4" ID x 3/8" SAE FF
76226	3/8"	Barb 1/4" ID x 3/8" SAE MF
76227	3/8"	Barb 1/4" ID x 1/4" Inverted Flare
76289	1/2"	Barb 3/8" ID x 1/2" FFS
76235	1/2"	Barb 3/8" ID x 3/8" SAE FF 45D

FERRULES

ITEM #	ID	DESCRIPTION
76259	1/4"	Brass Ferrule for 1/4" Thermoplastic
76269	1/4"	Stainless Steel Ferrule for 1/4" Thermoplastic
76254	3/8"	Brass Ferrule for 3/8" Thermoplastic
76270	3/8"	Stainless Steel Ferrule for 3/8" Thermoplastic

Please call for 5/16" and 1/2" Ferrules

BARB x PIPE FITTINGS

ITEM #	ID	DESCRIPTION
76222	1/4"	Barb 1/4" ID x 1/4" MP
76223	1/4"	Barb 1/4" ID x 3/8" MP
76220P	1/4"	Barb 1/4" ID x 3/8" FP
76219	1/4"	Barb 1/4" ID x 1/4" FP
76233	3/8"	Barb 3/8" ID x 3/8" MP
76283	3/8"	Barb 3/8" ID x 1/4" MP
76288P	3/8"	Barb 3/8" ID x 3/8" FP Swivel



High Pressure Rubber Hose designed to meet UL21, CGA, Type1, EN, British-BS and ASTM standards. Constructed from High Grade Aerospace Rubber Compounds. Resists wear 50% more than other leading brands. Superior cold weather flexibility to -65°F. Excellent for LPG transportation, vapor lines, plant use, and most other applications.

Construction:

- Tube: Extruded Nitrile (NBR)
- Cover: Specially Compounded Neoprene (CR)
- Working Temperature: -65°F to +180°F
- .25" - 1" smooth covered
- 1.25" + wrap covered
- Reinforcement: Textile
- Min. Burst: 1,750 PSI (5:1)



Part #	ID	UL-21 REEL/COIL LPG HOSE (All ONE PIECE per coil to minimize scrap)	TYPE
960000	1/4"	1/4" x 200 FT (smooth cover)	Coil
FR960000			Reel
960010	3/8"	3/8" X 200 FT (smooth cover)	Coil
FR960010			Reel
960020	1/2"	1/2" x 200 FT (smooth cover)	Coil
960030	3/4"	3/4" X 200 FT (smooth cover)	Coil
960040	1"	1" X 200 FT (smooth cover)	Coil
960045	1"	1" X 150 FT (smooth cover)	Coil
960050	1 1/4"	1 1/4" X 100 FT (wrapped cover)	Coil
960055	1 1/4"	1 1/4" X 200 FT (smooth cover)	Coil
960060	1 1/2"	1 1/2" X 100 FT (wrapped cover)	Coil
960070	2"	2" X 100 FT (wrapped cover)	Coil

Part #	ID	UL-21 RUBBER HOSE ASSEMBLIES	TYPE
965001	1"	1" x 125' - 1" MNPT x 1" MNPT - Steel	Bulk
965002	1"	1" x 150' - 1" MNPT x 1" MNPT - Steel	Bulk
965004	1"	1" x 200' - 1" MNPT x 1" MNPT - Steel	Bulk

TRUZERO® LPG FITTINGS & COUPLINGS

BARB x PIPE FITTINGS

ITEM #	ID	DESCRIPTION
951001	1/4"	1/4" Barb x 1/4" MNPT - Steel with Zinc Coating
951010	1/4"	1/4" Brass Barb x 9/16" FLHT Swivel
951011	1/4"	1/4" Brass Barb x 1/4" MNPT
952000	3/8"	3/8" Barb x 3/8" MNPT - Steel with Zinc Coating
952010	3/8"	3/8" Brass Barb x 3/8" MNPT
953001	1/2"	1/2" Barb x 1/2" MNPT - Steel with Zinc Coating
953010	1/2"	1/2" Brass Barb x 1/2" MNPT
954000	3/4"	3/4" Barb x 1/2" MNPT - Steel with Zinc Coating
954003	3/4"	3/4" Barb x 3/4" MNPT - Steel with Zinc Coating
955001	1"	1" Barb x 1" MNPT - Steel with Zinc Coating
956001	1 1/4"	1 1/4" Barb x 1 1/4" MNPT - Steel with Zinc Coating
957000	1 1/2"	1 1/2" Barb x 1 1/2" MNPT - Steel with Zinc Coating
958001	2"	2" Barb x 2" MNPT - Steel with Zinc Coating
958002	3"	3" Barb x 3" MNPT - Steel with Zinc Coating

BARB x FLARE FITTINGS

ITEM #	ID	DESCRIPTION
951000	1/4"	1/4" Barb x 1/4" FSAE - Steel with Zinc Coating
951005	1/4"	1/4" Brass Barb x FSAE Swivel
952001	3/8"	3/8" Barb x 3/8" FSAE - Steel with Zinc Coating
952005	3/8"	3/8" Brass Barb x FSAE Swivel
953000	1/2"	1/2" Barb x 1/2" FSAE - Steel with Zinc Coating
953005	1/2"	1/2" Brass Barb x FSAE Swivel
955000	1"	1" Barb x 1" FSAE - Steel with Zinc Coating
956000	1 1/4"	1 1/4" Barb x 1 1/4" FSAE - Steel with Zinc Coating
958000	2"	2" Barb x 2" FSAE Swivel - Steel with Zinc Coating

FERRULES

ITEM #	ID	DESCRIPTION
951006	1/4"	1/4" Brass HD Ferrule
952006	3/8"	3/8" Brass HD Ferrule
953006	1/2"	1/2" Brass HD Ferrule



WHAT'S INSIDE



UNIT HEATERS

Pages 12-13



TUBE HEATERS

Pages 6-8



NOMAD™ BOX HEATERS

Page 14



RESTAURANT/PATIO GLASS FRONT RADIANT HEATERS

Page 10

FORCED AIR KEROSENE HEATERS

Page 16



FORCED AIR PROPANE HEATERS

Page 16



TECHNICAL & CUSTOMER SERVICE

1-866-447-2194

WWW.HEATSTARBYENERCO.COM