
WOLVERINE BRASS, INC.
WBPRO FULL PORT FIP BALL VALVES

VALVE CONSTRUCTION:
- ☐ FULL PORT DESIGN.
- ☐ FORGED BRASS BODY.
- ☐ BRASS STEM.
- ☐ PLATED LOCK WASHER.
- ☐ CHROME PLATED MACHINED BRASS ROD BALL.
- ☐ BRASS ADJUSTABLE PACK NUT.
- ☐ NON-STICK TEFLON SEATS.
- ☐ CHROME PLATED REVERSIBLE STEEL HANDLE.
- ☐ DOUBLE STEM SEAL (TEFLON PACKING AND O-RING).

OPERATION:
- ☐ LEVER HANDLE.
- ☐ 90° TURN FROM FULL OFF TO FULL ON.
- ☐ 100% TESTED UNDER WATER.
- ☐ 600 WOG (Water, Oil, or Liquid Gas)
- ☐ 150 PSI SATURATED STEAM.

STANDARDS:
- ☐ IAPMO/UPC
- ☐ CSA / ANSI Z21.15 (LESS DRAIN ONLY)
- ☐ LOW LEAD COMPLIANT (0.25% Pb MAX).

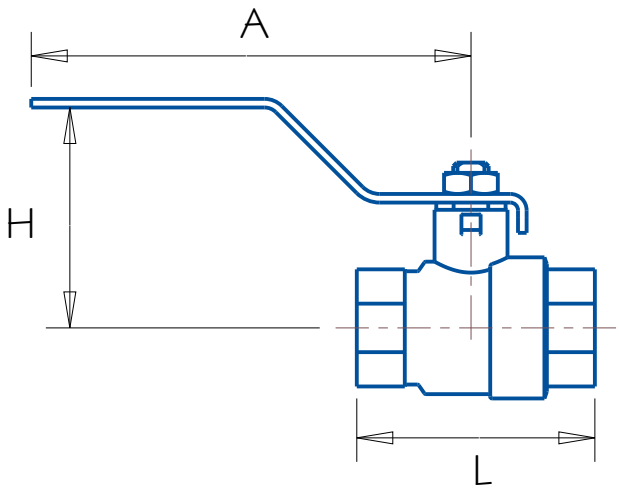

FEMALE IRON PIPE LESS DRAIN				
PART	SIZE	L	H	A
56127NL	1/4"	1-3/4"	1-1/2"	3-5/8"
56128NL	3/8"	1-3/4"	1-1/2"	3-5/8"
56105NL	1/2"	2-3/8"	1-3/4"	3-3/4"
56106NL	3/4"	2.5"	2"	4-3/8"
56107NL	1"	3"	2-1/8"	4-1/2"
56117NL	1-1/4"	3-1/2"	2-1/4"	5-1/8"
56118NL	1-1/2"	3-3/4"	2-1/2"	5-1/8"
56119NL	2"	4-1/4"	2-3/4"	5-1/8"
56125NL	2-1/2"	5-1/2"	4-3/8"	7-1/2"
56120NL	3"	6"	4-3/8"	8-3/8"

FEMALE IRON PIPE WITH DRAIN				
PART	SIZE	L	H	A
56111NL	1/2"	2-3/8"	1-3/4"	3-3/4"
56112NL	3/4"	2-1/2"	2"	4-3/8"
56113NL	1"	3"	2-1/8"	4-3/8"