


48"X48" + **ONE**

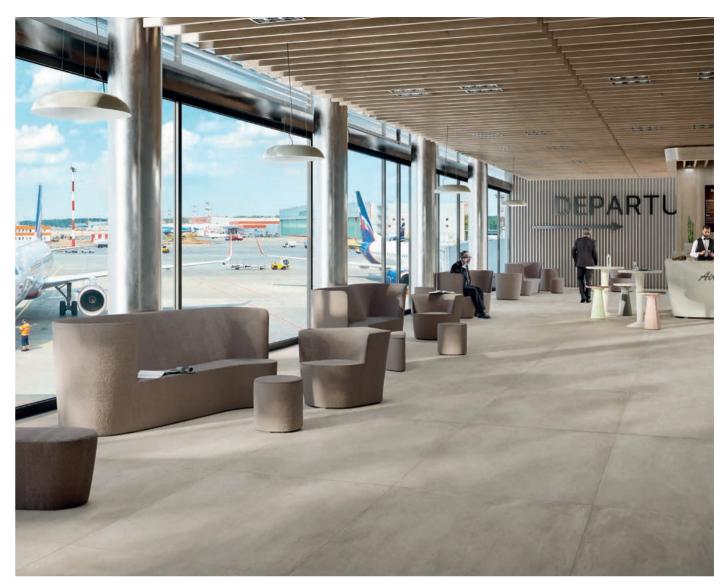

Floor: +One_48"x48"_Greige_Matte

CONCRETE BEAUTY

+ ONE's contemporary soul, which captures the look and the essence of poured concrete, is capable of creating a clean and simple style and giving each project a personal warm feeling and great visual charm. Its extreme attention to detail gives the environment elegance and vitality. Six outstanding color options and two finishes tell the inspiration of the authentic American industrial design, perfect for both residential and high-traffic commercial projects.

Six colors: chalk, greige, mud, ash, plumb and coal. Available in 12"x24", 24"x24", 24"x48", and 48"x48" floor & wall tile, 12"x12" mosaics.

1



+ONE CONCRETE BEAUTY

4 Sizes: 12"x24" - 24"x24" - 24"x48" - 48"x48" (only matte) - 10 mm

6 Colors: Chalk, Greige, Mud, Ash, Plumb, Coal

2 Surfaces: Matte & Polished



24"x24" 12"x24"















CANVAS

1 Size: 12"x24" - 10 mm 2 Colors: White and Moka 2 Surfaces: Matte & Polished

12"x24"





OUTDOOR 25m

3 Sizes: 12"x48" - 24"x24" - 24"x48" - 20 mm

3 Colors: Chalk, Greige, Ash

1 Surface: Matte

24"x24"

Available in:



24"x48"


12"x48"

GREIGE

ASH

CHALK


Sizes, mosaic and trim pieces

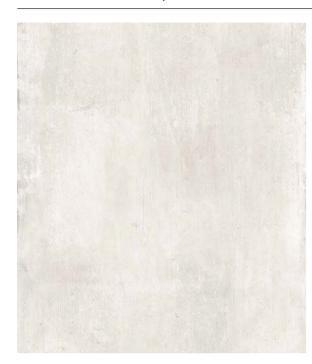

Thickness 10mm 12"x24" - 1101130 Matte 12"x24" - 1101226 Polished 24"x24" - 1101112 Matte 24"x24" - 1101208 Polished 24"x48" - 1101088 Matte

24"x48" - 1101184 Polished 48"x48" - 1103357 Matte Thickness 20mm

12"x48" - 1101411 Matte 24"x24" - 1101414 Matte 24"x48" - 1101841 Matte



12"x12" Mosaic (2"x2" - 36 dot) 1101148 Matte 1101238 Polished



3"x24" Bullnose 1101142 Matte 1101232 Polished



6"x12" Cove Base (*special order only) 1101136

MUD

Sizes, mosaic and trim pieces



Thickness 10mm 12"x24" - 1101132 Matte 12"x24" - 1101228 Polished 24"x24" - 1101114 Matte 24"x24" - 1101210 Polished 24"x48" - 1101090 Matte 24"x48" - 1101186 Polished



12"x12" Mosaic (2"x2" - 36 dot) 1101150 Matte 1101240 Polished



3"x24" Bullnose 1101144 Matte 1101234 Polished



6"x12" Cove Base (*special order only) 1101138

GREIGE

Sizes, mosaic and trim pieces



Thickness 10mm 12"x24" - 1101131 Matte 12"x24" - 1101227 Polished

24"x24" - 1101113 Matte 24"x24" - 1101209 Polished 24"x48" - 1101089 Matte

24"x48" - 1101185 Polished 48"x48" - 1103358 Matte

Thickness 20mm

12"x48" - 1101412 Matte 24"x24" - 1101415 Matte 24"x48" - 1101842 Matte



12"x12" Mosaic (2"x2" - 36 dot) 1101149 Matte 1101239 Polished



3"x24" Bullnose 1101143 Matte 1101233 Polished



6"x12" Cove Base (*special order only) 1101137

ASH

Sizes, mosaic and trim pieces



Thickness 10mm
12"x24" - 1101133 Matte
12"x24" - 1101229 Polished
24"x24" - 1101115 Matte
24"x24" - 1101211 Polished
24"x48" - 1101091 Matte
24"x48" - 1101187 Polished
48"x48" - 1103359 Matte

Thickness 20mm 12"x48" - 1101413 Matte 24"x24" - 1101416 Matte 24"x48" - 1101843 Matte



12"x12" Mosaic (2"x2" - 36 dot) 1101151 Matte 1101241 Polished



3"x24" Bullnose 1101145 Matte 1101235 Polished




6"x12" Cove Base (*special order only) 1101139

PLUME

Sizes, mosaic and trim pieces



Thickness 10mm 12"x24" - 1101134 Matte 12"x24" - 1101230 Polished 24"x24" - 1101116 Matte 24"x24" - 1101212 Polished 24"x48" - 1101092 Matte 24"x48" - 1101188 Polished



12"x12" Mosaic (2"x2" - 36 dot) 1101152 Matte 1101242 Polished



3"x24" Bullnose 1101146 Matte 1101236 Polished



6"x12" Cove Base (*special order only) 1101140

COAL

Sizes, mosaic and trim pieces



Thickness 10mm
12"x24" - 1101135 Matte
12"x24" - 1101231 Polished
24"x24" - 1101117 Matte
24"x24" - 1101213 Polished
24"x48" - 1101093 Matte
24"x48" - 1101189 Polished
48"x48" - 1103360 Matte



12"x12" Mosaic (2"x2" - 36 dot) 1101153 Matte 1101243 Polished



3"x24" Bullnose 1101147 Matte 1101243 Polished



6"x12" Cove Base (*special order only) 1101141

CANVAS WHITE

Sizes, mosaic and trim pieces



Thickness 10mm 12"x24" - 1101254 White Matte 12"x24" - 1101266 White Polished

CANVAS MOKA

Sizes, mosaic and trim pieces



Thickness 10mm 12"x24" - 1101255 Moka Matte 12"x24" - 1101267 Moka Polished

+One Canvas by MILE®stone presents the sleek, modern personality of American industrial design combined with stained concrete. A different view on concrete beauty, the matte or polished finishes pair perfectly with traditional and contemporary design projects.

Two colors: white and moka. Available in 12"x24" floor and wall tile options.








Wall: +One_12"x24"_ Canvas White_Polished










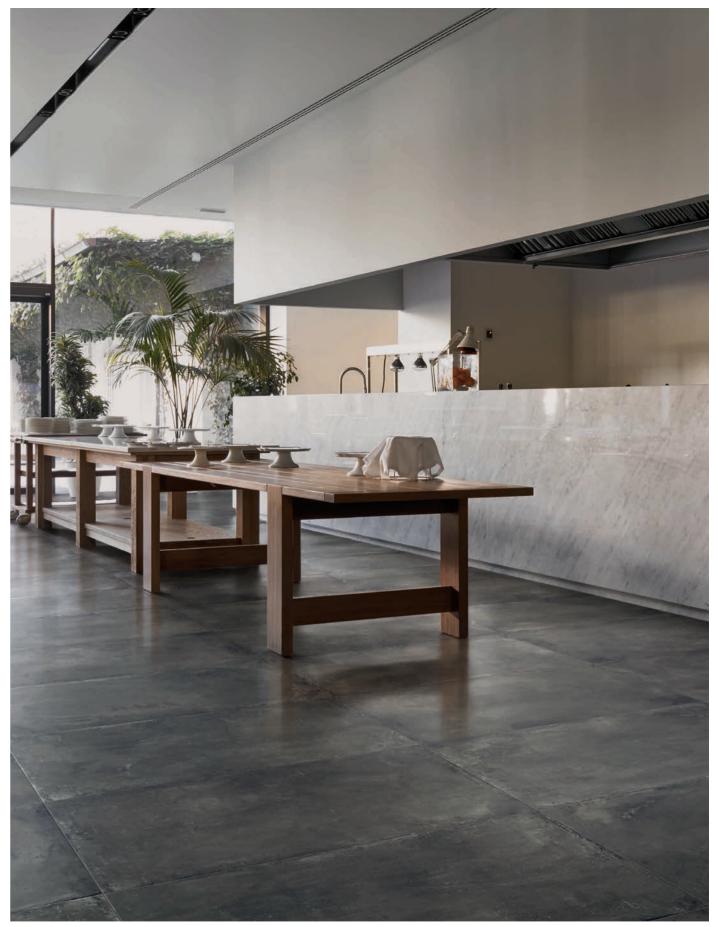

Floor: +One_24"x48"_Coal_Matte



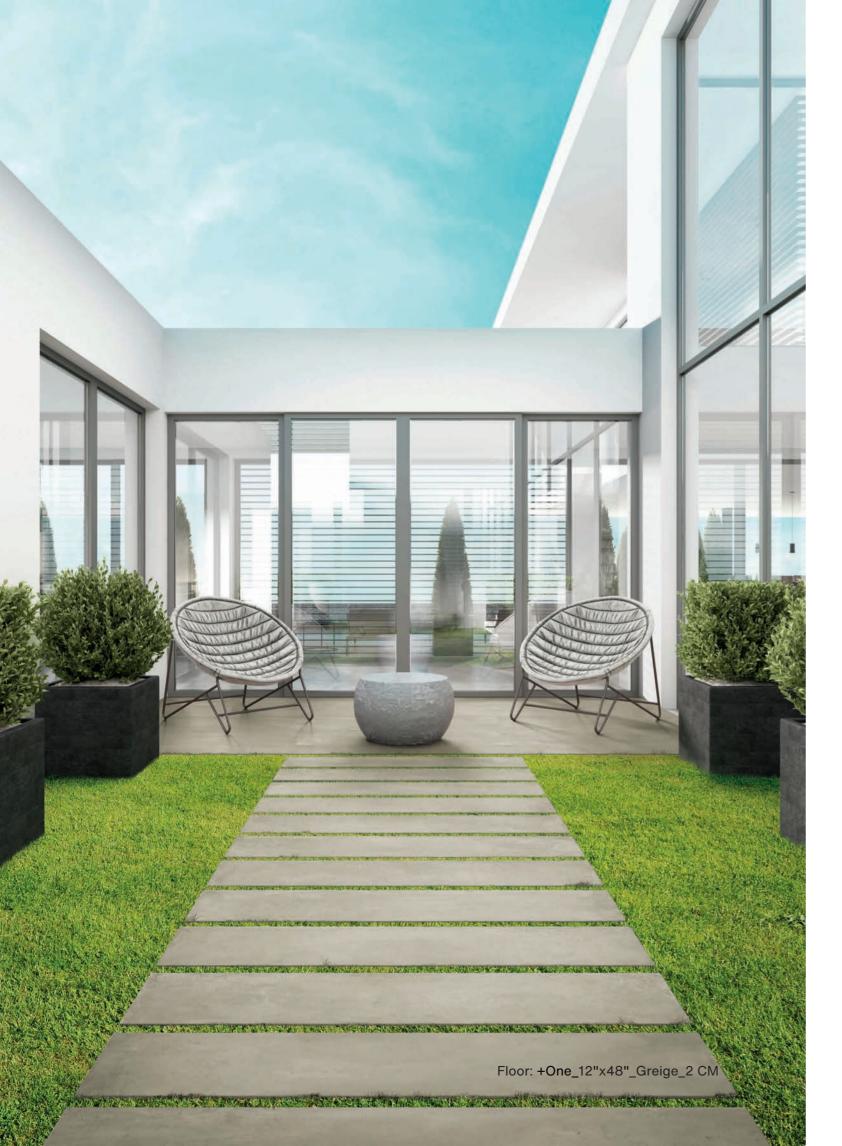



Floor: +One_24"x24"_Ash_2 CM



| Colors | 12"x24" | 24"x24" 10 mm | 24"x48" 10 mm | 48"x48" | 12"x48" 2 cm | 24"x24" 2 cm | 24"x48" 2 cm | 12"x12" mosaic (2"x2") | 3"x24" bullnose | 6"x12" cove base |
|-----------------|---|---|---|------------------|------------------|------------------|------------------|---|---|---------------------|
| CHALK | 1101130 Matte 1101226 Polished | 1101112 Matte 1101208 Polished | 1101088 Matte 1101184 Polished | 1103357 Matte | 1101411 Matte | 1101414 Matte | 1101841 Matte | 1101148 Matte 1101238 Polished | 1101142 Matte 1101232 Polished | 1101136 |
| GREIGE | 1101131 Matte 1101227 Polished | 1101113 Matte 1101209 Polished | 1101089 Matte 1101185 Polished | 1103358 Matte | 1101412 Matte | 1101415 Matte | 1101842 Matte | 1101149 Matte 1101239 Polished | 1101143 Matte 1101233 Polished | 1101137 |
| MUD | 1101132 Matte 1101228 Polished | 1101114 Matte 1101210 Polished | 1101090 Matte 1101186 Polished | - | - | - | - | 1101150 Matte 1101240 Polished | 1101144 Matte 1101234 Polished | 1101138 |
| ASH | 1101133 Matte 1101229 Polished | 1101115 Matte 1101211 Polished | 1101091 Matte 1101187 Polished | 1103359 Matte | 1101413 Matte | 1101416 Matte | 1101843 Matte | 1101151 Matte 1101241 Polished | 1101145 Matte 1101235 Polished | 1101139 |
| PLUMB | 1101134 Matte 1101230 Polished | 1101116 Matte 1101212 Polished | 1101092 Matte 1101188 Polished | - | - | - | - | 1101152 Matte 1101242 Polished | 1101146 Matte 1101236 Polished | 1101140 |
| COAL | 1101135 Matte 1101231 Polished | 1101117 Matte 1101213 Polished | 1101093 Matte 1101189 Polished | 1103360 Matte | - | - | - | 1101153 Matte 1101243 Polished | 1101147 Matte 1101243 Polished | 1101141 |
| CANVAS WHITE | 1101254 Matte 1101266 Polished | - | - | - | - | - | - | - | - | - |
| CANVAS MOKA | 1101255 Matte 1101267 Polished | - | - | - | - | - | - | - | - | - |

Packaging Specifications

| SIZES | | THICKNESS (MM) | PIECES PER BOX | UOM PER BOX | WEIGHT PER BOX | BOXES PER PALLET | UOM PER PALLET | WEIGHT PER PALLET* |
|---|---------|-------------------|-------------------|----------------|-------------------|---------------------|-------------------|-----------------------|
| FIELD TILES | | | | | | | | |
| 2"x24" RECTIFIED MATTE/POLISHED NOMINAL | | 10 mm | 6 | 12 SF | 52.8 LBS | 48 | 576 SF | 2,535 LBS |
| 24"x24" RECTIFIED MATTE/POLISHED NOMINAL | | 10 mm | 3 | 12 SF | 52.8 LBS | 36 | 432 SF | 1,901 LBS |
| 24"x48" RECTIFIED MATTE/POLISHED | NOMINAL | 10 mm | 3 | 24 SF | 115 LBS | 21 | 504 SF | 2,419 LBS |
| 48"x48" RECTIFIED MATTE | NOMINAL | 10 mm | 2 | 31 SF | 117,8 LBS | 20 | 620 SF | 2,356 LBS |
| 12"x48" RECTIFIED MATTE | NOMINAL | 20 mm | 4 | 16 SF | 147 LBS | 16 | 256 SF | 2,352 LBS |
| 24"x24" RECTIFIED MATTE | NOMINAL | 20 mm | 2 | 8 SF | 76 LBS | 36 | 288 SF | 2,736 LBS |
| 24"x48" RECTIFIED MATTE | NOMINAL | 20 mm | 2 | 16 SF | 152 LBS | 16 | 256 SF | 2,432 LBS |
| CANVAS | | | | | | | | |
| 12"x24" RECTIFIED MATTE / POLISHED | NOMINAL | 10 mm | 6 | 12 SF | 52.8 | 48 | 576 SF | 2,535 |
| MOSAIC AND COORDINATING TRIMS | | | | | | | | |
| 12"x12" MOSAIC (2"x2" - 36 DOT) MATTE / POLISHED | NOMINAL | 10 mm | 10 | 10 PCS | 35 | 45 | 450 PCS | 1,575 |
| 3"x24" BULLNOSE MATTE / POLISHED | NOMINAL | 10 mm | 12 | 12 PCS | 25.2 | 48 | 576 PCS | 1,201 |
| 6"x12" COVE BASE MATTE | NOMINAL | 7 mm | 10 | 10 PCS | 17.5 | 64 | 640 PCS | 1,120 |

^{*}WEIGHT PER PALLET DOES NOT INCLUDE pallet WEIGHT itself. All other sizes will be packaged as ordered.

Please contact MILE®stone Customer Service at 1-877-356-7461 for packaging information.

Minimum grout size recommended = 5 mm (or approx. 3/16") If staggered tile placement, we recommend using a 30% offset. If specified brick pattern with 1/2 pattern mandatory, a bigger grout is recommended to hide imperfections of installation (minimum 1/4").

Technical Specifications



This product meets or exceeds all standards described in ANSI A137.1.

| | SPECS | TEST METHOD | INDUSTRY STANDARD | MILE®stone VALUES | | |
|----------|---|----------------|--|---------------------------------|---|--|
| | WATER ABSORPTION | ASTM C373 | ≤0.5% | ≤0.4% | | |
| | PERCELAIN TILE 0.5% or less water absorption | ASTM C373 | 0.5% | absorption America | the water criteria of the n national rd PTCA | |
| * | SURFACE WEAR RESISTANCE | ANSI A137.1 | Surface Wear-resistance properties of glazed vitreous and porcelain tiles. | ALL RESIDENTIAL / COMMERCIAL | | |
| • | CHEMICAL RESISTANCE | ASTM C650 | A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects. | NOT AFFECTED | | |
| * | D.C.O.F. AcuTest® | ANSI A326.3 | ≥0.42 WET | | 2 WET VET 2CM | |
| * | STAIN RESISTANCE | ASTM C1378 | Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning. | NOT AFFECTED | | |
| <u> </u> | BREAKING STRENGTH | ASTM C648 | ≥250 lbf | 8mm ≥300 lbf 10mm ≥400 lbf | | |
| <u> </u> | BREAKING STRENGTH OUTDOOR 2CM | ASTM 1505 | 2000 lbf (10.9 kN) | ≥2500 lbf | | |
| * | RESISTANCE TO FREEZE | ASTM C1026 | A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects. | RESISTANT | | |
| | WARPAGE EDGE | ASTM C485 | ±0.40% or ±0.05 in (±1.8 mm) | ± 0.40% Rectified | | |
| | WARPAGE DIAGONAL | ASTM C485 | ±0.40% or ±0.07 in (±1.8 mm) | ± 0.40% | Rectified | |
| H | WEDGING | ASTM C502 | ±0.25% or ±0.03 in (±0.8 mm) | ± 0.25% | Rectified | |
| | WARPAGE EDGE | ASTM C485 | ±0.50% or ±0.07 in (±1.8 mm) | ± 0.50% | Calibrated | |
| | WARPAGE DIAGONAL | ASTM C485 | ±0.50% or ±0.07 in (±1.8 mm) | ± 0.50% | Calibrated | |
| H | WEDGING | ASTM C502 | ±0.50% or ±0.08 in (±2.0 mm) | ± 0.50% Calibrated | | |
| <u> </u> | THICKNESS | ASTM C499 | Range: ± 0.04 in | ≤0.04 in | | |

[•] Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE*stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices.

Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- · Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE*stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.



Cleaning & Maintenance / Routine Care Instructions

29



Scan the QR code with your smartphone.

Green Certifications & Accreditations

DESCRIPTION

| | DESCRIPTION |
|--|--|
| Serveled code | Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact. |
| Scholed Course | Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint. |
| | Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint. |
| G GREEN SQUARED | Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact. |
| Environment PRIORITY ONE | A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it. |
| hpd version 2.0 | The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials. |
| Red List Free | Declare labels disclose all intentionally added ingredients and residuals present in the final product. Being Red List Free means the worst materials, chemicals, and elements for human and environmental health are not present within our products. |
| Certified Environmental Product Declaration www.nst.org | Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile. |
| GRENGUARD THE STATE OF THE STA | Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified. |
| Product Certification BUREAU VERITAS Certification | Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content. |
| TILE COUNCIL OF NORTH AMERICA, INC. | Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards. |
| THE DESCRIPTION OF THE PROPERTY OF THE PROPERT | USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification. |
| INTERNATIONAL LIVING FUTURE | Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community. |
| The state of the s | The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020. |

This product meets or exceeds all standards described in ANSI A137.1. Este product cumple o exceed todos los estandares de ANSI A137.1.





300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461

