


SKINTOP® GMP-GL/GMP-GL-M/GMP-HF-M

Hexagonal locknuts for NPT, PG & metric strain relief cable glands

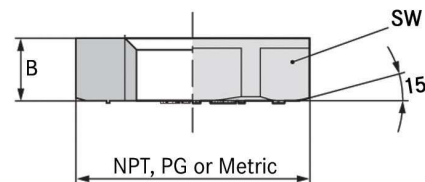

Designed for use with SKINTOP® cable glands with NPT, PG & metric threads.

■ Technical data

 Material:	glass fiber-reinforced polyamide halogen-free polyamide, V-0 per UL 94
 Temperature range:	-20°C to +100°C
 Color:	black (RAL 9005), UV resistant gray (RAL 7001) - halogen-free: light gray (RAL 7035)

■ Approvals: NPT & halogen-free metric



■ Approvals: PG & metric*



* UL only when used with UL-approved SKINTOP® polyamide cable glands

Part number			Size	Wrenching flats (SW) (in)	Nut thickness (D) in	Pack size
black	gray	light gray				
NPT thread						
911370	—	—	NPT ⅜"	0.866	0.198	100
911371	—	—	NPT ½"	1.063	0.236	100
911372	—	—	NPT ¾"	1.417	0.276	50
911373	—	—	NPT 1"	1.654	0.276	50
PG thread						
53019200	53019000	—	PG 7	0.748	0.197	100
53019210	53019010	—	PG 9	0.866	0.197	100
53019220	53019020	—	PG 11	0.945	0.197	100
53019230	53019030	—	PG 13	1.063	0.236	100
53019240	53019040	—	PG 16	1.181	0.236	100
53019250	53019050	—	PG 21	1.418	0.276	50
53019260	53019060	—	PG 29	1.812	0.276	50
53019270	53019070	—	PG 36	2.364	0.315	25
53019280	53019080	—	PG 42	2.561	0.315	25
53019290	53019090	—	PG 48	2.758	0.315	25
Metric thread						
53119100	53119000	53119200	M12 x 1.5	0.669	0.197	100
53119110	53119010	53119210	M16 x 1.5	0.866	0.197	100
53119120	53119020	53119220	M20 x 1.5	1.063	0.236	100
53119130	53119030	53119230	M25 x 1.5	1.339	0.236	100
53119140	53119040	53119240	M32 x 1.5	1.615	0.276	100
53119150	53119050	53119250	M40 x 1.5	1.970	0.276	25
53119160	53119060	53119260	M50 x 1.5	2.364	0.315	25
53119170	53119070	53119270	M63 x 1.5	2.955	0.315	25