1F Condulet® Conduit Bodies - Cast Iron or Aluminum

Gasket and Covers see page 8

Applications:

Conduit outlet bodies are installed in conduit systems to:

- Act as pull outlets for conductors being installed
- Provide openings for making splices and taps in conductors
- Connect conduit sections
- Provide taps for branch conduit runs
- Make 90° bends in conduit runs
- Provide for access to conductors for maintenance and future system changes

Features:

Conduit Outlet Bodies

- Form 7 Condulet outlet bodies approach conduit in size for neat, compact installations
- Form 8 and Mark 9 bodies provide more room for heavier conductors
- Many shapes and sizes are available for rigid threaded conduit – for complete listings see pages 6–12
- Conduit hubs have tapered threads and feature integral bushings for protection of wire insulation
- Form 7 has exclusive snaptight and wedgenut cover attachment to provide clear, unobstructed cover opening
- Built-in rollers on all Form 5 1¼" to 4" C and LB bodies to facilitate wire pulling
- Series 5 bodies available in optional configuration with set screws on hubs for EMT conduit (add suffix -MT to catalog number)

Gaskets

Solid gaskets:

- Are used with blank covers
- For Mark 9 and Form 5, can be converted to open type gaskets by tearing out center section along scored lines – ½" to 2" sizes
- For Form 7 are used with all covers

Open gaskets:

- For Form 8 – ½" to 4" sizes
- For Mark 9 – 2½" to 4" sizes

Blank Covers

Stainless steel cover screws are standard on Form 7, Form 8, Mark 9, Series 5 and Form 5 covers.

- **Form 7**

Wedge nut design facilitates installation and removal. Nuts are held captive in cover. Covers can be used with or without gaskets. SNAPTIGHT™ Form 7 Covers with integral sealing gaskets are installed without the use of screws, reducing installation time and costs. Covers are reusable.

- **Form 8**

Two cover screws provided on all sizes to provide tight cover and gasket assembly. *Feraloy* iron alloy covers have dome shapes for added strength and extra wiring room.

- **Mark 9**

Self-retaining cover screws.

Certifications and Compliances:

Outlet Bodies –

- UL Standard: 514B
- Fed. Spec.: W-C-586D
- CSA Standard 22.2 No. 18
- NEMA 3R Raintight (when installed with cover and gasket)

Standard Materials:


- Form 7, Form 8 outlet bodies – *Feraloy* iron alloy
- Mark 9 outlet bodies – copper-free aluminum
- Form 5 – malleable iron
- Series 5 – die cast aluminum

Standard Finishes:

- Form 7, Form 8 outlet bodies – electrogalvanized with aluminum acrylic paint
- Mark 9 outlet bodies – natural
- Form 5 – electrogalvanized with aluminum acrylic paint
- Series 5 – aluminum acrylic paint

Options:


Description	Suffix
Form 7 body and cover only:	
Copper-free aluminum	**SA**
Corro-free™ epoxy powder coat - external body only	**S752**
Corro-free™ epoxy powder coat - internal and external	**S753**
Series 5 in an EMT version with set screws on all hubs	**MT**
Series 5 pre-packaged with neoprene gasket and cover	**CGN**




Form 7



Mark 9



Form 8

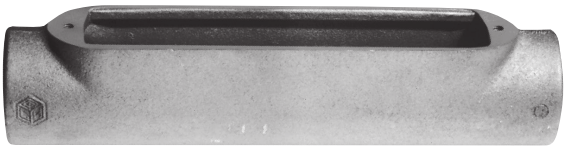





Mogul

 Copyright© 2013 Eaton's Crouse-Hinds Business

Condulet® Conduit Bodies - Cast Iron or Aluminum

Dimensions Pgs. See pages 10–12 (Dimensions for Form 5 – see Section CP)

Threaded Rigid Bodies

Shape	Style	Hub Size ½	¾	1	1¼	1½	2	2½	3	3½	4
	**C**										
	Form 7	**C17**	**C27**	**C37**	**C47**	**C57**	**C67**	**C77**	**C87**		
	Form 8	**C18**	**C28**	**C38**	**C448**	**C58**	**C68**	**C78**	**C88**		
	Mark 9	**C19**	**C29**	**C39**	**C49**	**C59**	**C69**	**C789**	**C889**	**C989**	**C1089**
	Form 5	**C50M**	**C75M**	**C100M**	**C125M***	**C150M***	**C200M***	**C250M***	**C300M***	**C350M***	**C400M***
	Series 5	**C15**	**C25**	**C35**	**C45**	**C55**	**C65**	**C75**	**C85**	**C95***	**C105***
	**E**										
	Form 7	**E17**	**E27**	**E37**							
	**L**										
	Form 7	**L17**	**L27**	**L37**	**L47**	**L57**	**L67**				
	Double faced – may be used as LL or LR – has 2 openings, one of which is furnished with a blank sheet steel cover										
	**LB**										
	Form 7	**LB17**	**LB27**	**LB37**	**LB47**	**LB57**	**LB67**	**LB777**	**LB87**	**LB97**	**LB107**
	Form 8	**LB18**	**LB28**	**LB38**	**LB448**	**LB58**	**LB68**	**LB78**	**LB888**	**LB98**	**LB108**
	Mark 9	**LB19**	**LB29**	**LB39**	**LB49**	**LB59**	**LB69**	**LB789**	**LB889**	**LB989**	**LB1089**
	Form 5	**LB50M**	**LB75M**	**LB100M**	**LB125M***	**LB150M***	**LB200M***	**LB250M***	**LB300M***	**LB350M***	**LB400M***
	Series 5	**LB15**	**LB25**	**LB35**	**LB45**	**LB55**	**LB65**	**LB75**	**LB85**	**LB95**	**LB105**
	**LL**										
	Form 7	**LL17**	**LL27**	**LL37**	**LL47**	**LL57**	**LL67**	**LL777**	**LL87**	**LL97**	**LL107**
	Form 8	**LL18**	**LL28**	**LL38**	**LL448**	**LL58**	**LL68**	**LL78**	**LL888**		
	Mark 9	**LL19**	**LL29**	**LL39**	**LL49**	**LL59**	**LL69**	**LL789**	**LL889**	**LL989**	**LL1089**
	Form 5	**LL50M**	**LL75M**	**LL100M**	**LL125M**	**LL150M**	**LL200M**	**LL250M**	**LL300M**	**LL350M**	**LL400M**
	Series 5	**LL15**	**LL25**	**LL35**	**LL45**	**LL55**	**LL65**	**LL75**	**LL85**	**LL95**	**LL105**
	**LR**										
	Form 7	**LR17**	**LR27**	**LR37**	**LR47**	**LR57**	**LR67**	**LR777**	**LR87**	**LR97**	**LR107**
	Form 8	**LR18**	**LR28**	**LR38**	**LR448**	**LR58**	**LR68**	**LR78**	**LR888**		
	Mark 9	**LR19**	**LR29**	**LR39**	**LR49**	**LR59**	**LR69**	**LR789**	**LR889**	**LR989**	**LR1089**
	Form 5	**LR50M**	**LR75M**	**LR100M**	**LR125M**	**LR150M**	**LR200M**	**LR250M**	**LR300M**	**LR350M**	**LR400M**
	Series 5	**LR15**	**LR25**	**LR35**	**LR45**	**LR55**	**LR65**	**LR75**	**LR85**	**LR95**	**LR105**
	**T**										
	Form 7	**T17**	**T27**	**T37**	**T47**	**T57**	**T67**	**T77**	**T87**	**T97**	**T107**
	Form 8	**T18**	**T28**	**T38**	**T448**	**T58**	**T68**	**T78**	**T88**		
	Mark 9	**T19**	**T29**	**T39**	**T49**	**T59**	**T69**	**T789**	**T889**	**T989**	**T1089**
	Form 5	**T50M**	**T75M**	**T100M**	**T125M**	**T150M**	**T200M**	**T250M**	**T300M**	**T350M**	**T400M**
	Series 5	**T15**	**T25**	**T35**	**T45**	**T55**	**T65**	**T75**	**T85**	**T95***	**T105***
	**TA**										
	Form 7	**TA17**	**TA27**	**TA37**	**TA47**	**TA57**	**TA67**				
	**TB**										
	Form 7	**TB17**	**TB27**	**TB37**	**TB47**	**TB57**	**TB67**				
	Form 8	**TB18**	**TB28**	**TB38**	**TB448**	**TB58**	**TB68**				
	Mark 9	**TB19**	**TB29**	**TB39**	**TB49**	**TB59**	**TB69**				
	Series 5	**TB15**	**TB25**	**TB35**	**TB45**	**TB55**	**TB65**				
	Form 5	**TB50M**	**TB75M**	**TB100M**	**TB125M**	**TB150M**	**TB200M**				
	**X**										
	Form 7	**X17**	**X27**	**X37**	**X47**	**X57**	**X67**				
	Form 8	**X18**	**X28**	**X38**	**X448**	**X58**	**X68**				
	Mark 9	**X19**	**X29**	**X39**							
	Series 5	**X15**	**X25**	**X35**	**X45**	**X55**	**X65**				
	Form 5	**X50M**	**X75M**	**X100M**	**X125M**	**X150M**	**X200M**				

* 1¼" - 4" Form 5 LB and C bodies are supplied with built-in rollers to facilitate wire pulling.

 Copyright© 2013 Eaton's Crouse-Hinds Business

1F Condulet® Conduit Bodies - Cast Iron or Aluminum

Covers and Gaskets
Dimensions Pgs. See pages 10–12 (Dimensions for Form 5 – see Section CP)

Blank Covers





	Sheet Steel					
Size	Form 7 Wedgenut Cat. #	Form 7 Snaptight™ Covers‡ Cat. #	Form 7 Wedgenut w/Integral Gasket Cat. #	Form 8§ Cat. #	Form 8 w/Integral Gasket Cat. #	Form 5 w/Integral Gasket** Cat. #
½	170	170SG	170G	180	180G	K50SG
¾	270	270SG	270G	280	280G	K75SG
1	370	370SG	370G	380	380G	K100SG
1¼	470	470SG	470G	480	480G	K125SG
1½	570	570SG	570G	580	580G	K125SG
2	670	670SG	670G	680	680G	K200SG
2½	870		870G	880		K250SG
3	870		870G	880		K250SG
3½	970		970G	980		K350SG
4	970		970G	980		K350SG

‡Form 7 Snaptight covers with integral sealing gasket are installed without the use of screws.
§Two cover screws on ½" to 2" Form 8 covers and four cover screws on 2½" and larger Form 8 covers.
**For cover without integral gasket, remove G from catalog number.





	Sheet Aluminum					Feraloy® Iron Alloy				Cast Aluminum
Size	Mark 9 Cat. #	Mark 9 w/Integral Gasket Cat. #	Form 7 Cat. #	Form 7 w/Integral Gasket Cat. #	Series 5 w/Integral Gasket** Cat. #	Form 7 Wedgenut Cat. #	Form 7 Wedgenut w/Integral Gasket Cat. #	Form 8§ Cat. #	Form 5‡ Cat. #	Form 7 Wedgenut Cat. #
½	190	190G	170 SA	170G SA	150 G	170F	170FG	180F	K50CM	170F SA
¾	290	290G	270 SA	270G SA	250 G	270F	270FG	280F	K75CM	270F SA
1	390	390G	370 SA	370G SA	350 G	370F	370FG	380F	K100CM	370F SA
1¼	490	490G	470 SA	470G SA	450 G	470F	470FG	480F	K125CM	470F SA
1½	590	590G	570 SA	570G SA	450 G	570F	570FG	580F	K125CM	570F SA
2	690	690G	670 SA	670G SA	650 G	670F	670FG	680F	K200CM	670F SA
2½	889		870 SA		850 G	870F		880F	K250CM	870F SA
3	889		870 SA		850 G	870F		880F	K250CM	870F SA
3½	989		970 SA		950 G	970F		980F	K350CM	970F SA
4	989		970 SA		950 G	970F		980F	K350CM	970F SA

‡Malleable iron covers.
§Two cover screws on ½" to 2" Form 8 covers and four cover screws on 2½" and larger Form 8 covers.
**For cover without integral gasket, remove G from catalog number.

Solid Gaskets - Neoprene






Size	Form 7 Cat. #	Form 8* Cat. #	Mark 9† Cat. #	Form 5 Cat. #	Series 5 Cat. #
½	GASK571	GASK851N	GASK1941	GK50N	GASK015N
¾	GASK572	GASK852N	GASK1942	GK75N	GASK025N
1	GASK573	GASK853N	GASK1943	GK100N	GASK035N
1¼	GASK574	GASK854N	GASK1944	GK125N	GASK045N
1½	GASK575	GASK805N	GASK1945	GK125N	GASK045N
2	GASK576	GASK806N	GASK1946	GK200N	GASK065N
2½	GASK578	GASK808N	GASK808N	GK250N	GASK085N
3	GASK578	GASK808N	GASK808N	GK250N	GASK085N
3½	GASK579	GASK809N	GASK809N	GK350N	GASK095N
4	GASK579	GASK809N	GASK809N	GK350N	GASK095N

*½ – 1¼ are solid gaskets; 1½ – 4 are open gaskets.
†½ – 2 are solid gaskets; 2½ – 4 are open gaskets.

 Copyright© 2015 Eaton's Crouse-Hinds Business

1F Condulet® Conduit Bodies - Cast Iron or Aluminum

Dimensions (In Inches)

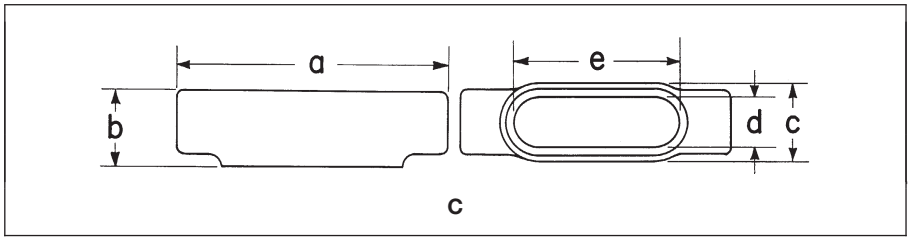

Form 7 C


Size	½	¾	1	1¼	1½	2	2½	3
a	5 3/8	6	7	7 7/16	8 3/16	9 3/16	12	11 3/4
b	1 3/8	1 5/8	1 7/8	2 5/16	2 9/16	3 1/8	3 5/8	4 3/8
c	1 3/8	1 9/16	1 3/4	2 3/16	2 7/16	3	4 1/4	4 1/4
d	15/16	1 1/8	1 3/8	1 3/4	1 15/16	2 7/16	3 9/16	3 9/16
e	3 3/16	3 13/16	4 1/2	5	5 7/16	6 3/8	8 3/8	8 3/8


Form 8 C

Size	½	¾	1	1¼	1½	2	2½	3
a	5 11/16	6 9/32	7 5/16	8 1/2	10 3/8	12 1/4	15 5/8	15 5/8
b	1 7/16	1 11/16	1 15/16	2 3/8	2 25/32	3 9/16	4 7/16	4 13/16
c	1 3/8	1 3/16	1 3/4	2 3/16	2 3/4	3 3/4	5	5
d	1	1 3/16	1 3/8	1 3/4	2 1/8	3	4 1/4	4 1/4
e	3 5/16	3 15/16	4 9/16	5 5/16	6 1/2	8 9/16	10 7/8	10 7/8

Mark 9 C

Size	½	¾	1	1¼	1½	2	2½	3	3½	4
a	4 31/32	5 11/32	6 19/32	7 5/8	8 11/32	10 5/8	15 5/8	15 5/8	18 3/4	18 3/4
b	1 13/32	1 5/8	1 7/8	2 1/2	2 13/16	3 7/16	4 7/16	4 13/16	5 11/16	5 15/16
c	1 3/8	1 9/16	1 3/4	2 3/16	2 1/2	3 7/32	5	5	6 1/4	6 1/4
d	1 1/8	1 1/4	1 3/8	1 27/32	2 5/32	2 25/32	4 1/4	4 1/4	5 7/16	5 7/16
e	3 9/32	3 27/32	4 9/16	5 3/16	5 7/8	8 3/32	10 7/8	10 7/8	13 7/16	13 7/16

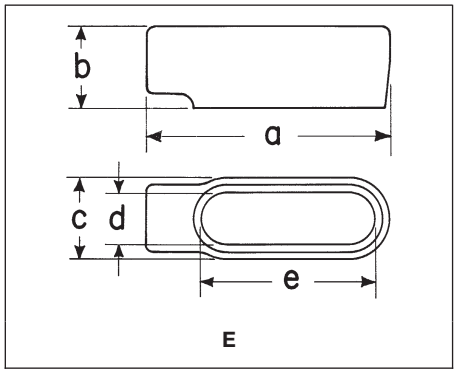

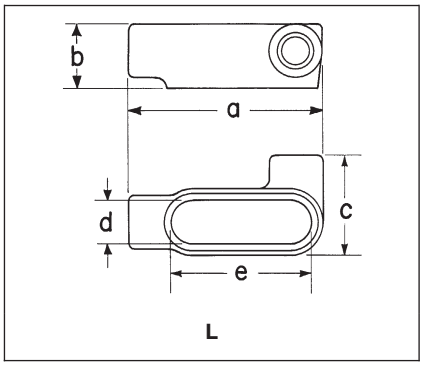

Form 7 E

Size	½	¾	1
a	4 9/16	5 3/16	6
b	1 3/8	1 5/8	1 7/8
c	1 3/8	1 9/16	1 3/4
d	15/16	1 1/8	1 3/8
e	3 3/16	3 13/16	4 1/2

Form 7 L


Size	½	¾	1	1¼	1½	2
a	4 9/16	5 3/16	6	6 1/2	7 1/8	8 1/8
b	1 3/8	1 5/8	1 7/8	2 5/16	2 9/16	3 1/8
c	2 1/4	2 7/16	2 3/4	3 3/16	3 9/16	4 1/8
d	15/16	1 1/8	1 3/8	1 3/4	1 15/16	2 7/16
e	3 3/16	3 13/16	4 1/2	5	5 7/16	6 3/8

 Copyright© 2015 Eaton's Crouse-Hinds Business

Crouse-Hinds by EATON

Condulet® Conduit Bodies - Cast Iron or Aluminum

Dimensions (In Inches)

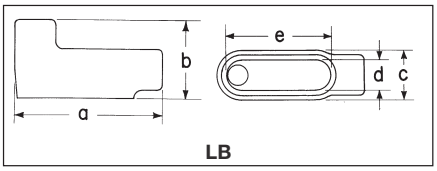

LB

Form 7 LB

Size	½	¾	1	1¼	1½	2	2½	3	3½	4
a	4 9/16	5 3/16	6	6 1/2	7 1/8	8 1/8	10 1/2	10 1/2	12 11/16	12 11/16
b	2 1/4	2 1/2	2 7/8	3 5/16	3 11/16	4 1/4	5 1/8	5 7/8	6 9/16	7 1/16
c	1 3/8	1 9/16	1 3/4	2 3/16	2 7/16	3	4 1/4	4 1/4	5 1/4	5 1/4
d	15/16	1 1/8	1 3/8	1 3/4	1 15/16	2 7/16	3 9/16	3 9/16	4 1/2	4 1/2
e	3 3/16	3 13/16	4 1/2	5	5 7/16	6 3/8	8 3/8	8 3/8	10 1/4	10 1/4

Form 8 LB

Size	½	¾	1	1¼	1½	2	2½	3	3½	4
a	4 15/16	5 9/16	6 15/32	7 17/32	9 1/8	11	13 15/16	13 15/16	16 7/8	16 7/8
b	2 7/32	2 7/16	2 13/16	3 11/32	4 1/32	4 13/16	6 1/8	6 1/2	7 9/16	7 13/16
c	1 3/8	1 9/16	1 3/4	2 3/16	2 3/4	3 3/4	5	5	6 1/4	6 1/4
d	1	1 3/16	1 3/8	1 3/4	2 1/8	3	4 1/4	4 1/4	5 7/16	5 7/16
e	3 5/16	3 15/16	4 9/16	5 5/16	6 1/2	8 9/16	10 7/8	10 7/8	13 7/16	13 7/16

Mark 9 LB

Size	½	¾	1	1¼	1½	2	2½	3	3½	4
a	4 19/32	5 1/4	6 3/32	7 1/32	7 3/4	10 1/32	13 15/16	13 15/16	16 7/8	16 7/8
b	2 1/8	2 13/32	2 27/32	3 15/32	3 3/4	4 15/32	6 1/8	6 1/2	7 9/16	7 13/16
c	1 3/8	1 9/16	1 3/4	2 3/16	2 1/2	3 3/16	5	5	6 1/4	6 1/4
d	1 3/16	1 3/8	1 1/2	1 15/16	2 1/4	2 7/8	4 1/4	4 1/4	5 7/16	5 7/16
e	3 5/16	3 15/16	4 9/16	5 5/16	6	8 1/16	10 7/8	10 7/8	13 7/16	13 7/16



LL LR

Form 7 LL & LR

Size	½	¾	1	1¼	1½	2	2½	3	3½	4
a	4 9/16	5 3/16	6	6 1/2	7 1/8	8 1/8	10 1/2	10 1/2	12 11/16	12 11/16
b	1 3/8	1 5/8	1 7/8	2 5/16	2 9/16	3 1/8	3 5/8	4 3/8	4 7/8	5 3/8
c	2 1/4	2 7/16	2 3/4	3 3/16	3 9/16	4 1/8	5 3/4	5 3/4	6 15/16	6 15/16
d	15/16	1 1/8	1 3/8	1 3/4	1 15/16	2 7/16	3 9/16	3 9/16	4 1/2	4 1/2
e	3 3/16	3 13/16	4 1/2	5	5 7/16	6 3/8	8 3/8	8 3/8	10 1/4	10 1/4

Form 8 LL & LR

Size	½	¾	1	1¼	1½	2	2½	3
a	4 15/16	5 9/16	6 15/32	7 17/32	9 1/8	11	13 15/16	13 15/16
b	1 7/16	1 11/16	1 15/16	2 3/8	2 25/32	3 9/16	4 7/16	4 13/16
c	2 5/32	2 5/16	2 5/8	3 5/32	4	5	6 11/16	6 11/16
d	1	1 3/16	1 3/8	1 3/4	2 1/8	3	4 1/4	4 1/4
e	3 5/16	3 15/16	4 9/16	5 5/16	6 1/2	8 9/16	10 7/8	10 7/8


Mark 9 LL & LR

Size	½	¾	1	1¼	1½	2	2½	3	3½	4
a	4 19/32	5 1/4	6 3/32	7 1/32	7 3/4	10 1/32	13 15/16	13 15/16	16 7/8	16 7/8
b	1 3/8	1 5/8	1 7/8	2 1/2	2 3/4	3 7/16	4 7/16	4 13/16	5 11/16	5 15/16
c	2 1/8	2 3/8	2 5/8	3 3/32	3 7/16	4 1/8	6 11/16	6 11/16	8 1/8	8 1/8
d	1 3/16	1 3/8	1 1/2	1 15/16	2 1/4	2 7/8	4 1/4	4 1/4	5 7/16	5 7/16
e	3 5/16	3 15/16	4 9/16	5 5/16	6	8 1/16	10 7/8	10 7/8	13 7/16	13 7/16

 Copyright© 2013 Eaton's Crouse-Hinds Business

1F Condulet® Conduit Bodies - Cast Iron or Aluminum

Dimensions (In Inches)

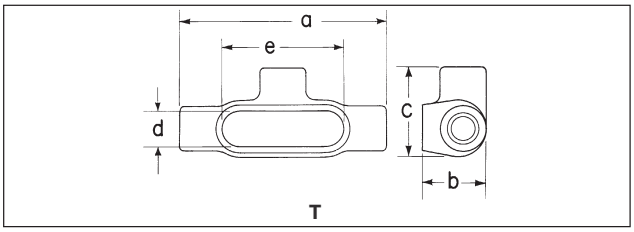

T

Form 7T


Size	a	b	c	d	e
1/2	5 5/8	1 3/4	2 7/16	15/16	3 3/16
3/4	6 1/4	2	2 5/8	1 1/8	3 13/16
1	7 1/4	2 1/4	3	1 3/8	4 1/2
1 1/4	7 7/16	2 5/16	3 3/16	1 3/4	5
1 1/2	8 3/16	2 9/16	3 9/16	1 15/16	5 7/16
2	9 3/16	3 1/8	4 1/8	2 7/16	6 3/8
2 1/2	12	3 5/8	5 3/4	3 9/16	8 3/8
3	12 1/16	4 3/8	5 3/4	3 9/16	8 3/8
3 1/2	14 5/16	4 7/8	6 15/16	4 1/2	10 1/4
4	14 5/16	5 3/8	6 15/16	4 1/2	10 1/4

Form 8T

1/2	5 11/16	1 3/4	2 5/32	1	3 5/16
3/4	6 9/32	2	2 5/16	1 3/16	3 15/16
1	7 5/16	2 1/4	2 5/8	1 3/8	4 9/16
1 1/4	8 1/2	2 5/8	3 5/32	1 3/4	5 5/16
1 1/2	10 3/8	2 25/32	4	2 1/8	6 1/2
2	12 1/4	3 9/16	5	3	8 9/16
2 1/2	15 5/8	4 7/16	6 11/16	4 1/4	10 7/8
3	15 5/8	4 13/16	6 11/16	4 1/4	10 7/8

Mark 9T


1/2	5	1 3/8	2 1/8	1 3/16	3 5/16
3/4	5 11/16	15/8	2 3/8	1 3/8	3 15/16
1	6 19/32	1 7/8	2 5/8	1 1/2	4 9/16
1 1/4	7 1/2	2 1/2	3 3/32	1 15/16	5 5/16
1 1/2	8 1/4	2 3/4	3 7/16	2 1/4	6
2	10 1/2	3 7/16	4 1/8	2 7/8	8 1/16
2 1/2	15 5/8	4 7/16	6 11/16	4 1/4	10 7/8
3	15 5/8	4 13/16	6 11/16	4 1/4	10 7/8
3 1/2	18 3/4	5 11/16	8 1/8	5 7/16	13 7/16
4	18 3/4	5 15/16	8 1/8	5 7/16	13 7/16

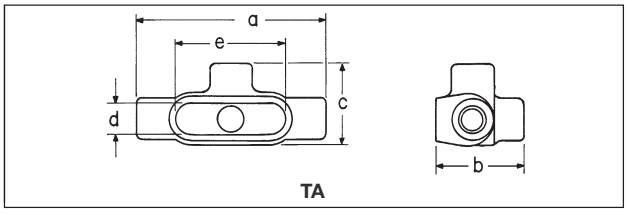

TA

Form 7TA

Size	a	b	c	d	e
1/2	5 5/8	2 5/8	2 7/16	15/16	3 3/16
3/4	6 1/4	2 7/8	2 5/8	1 1/8	3 13/16
1	7 1/4	3 1/4	3	1 3/8	4 1/2
1 1/4	7 7/16	3 5/16	3 3/16	1 3/4	5
1 1/2	8 3/16	3 11/16	3 9/16	1 15/16	5 7/16
2	9 3/16	4 1/4	4 1/8	2 7/16	6 3/8

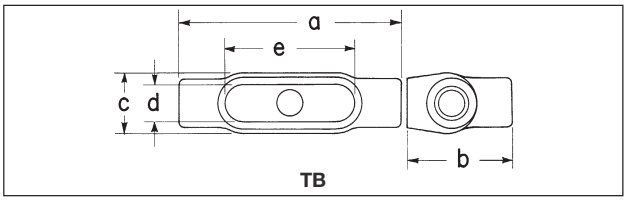

TB

Form 7TB


Size	a	b	c	d	e
1/2	5 5/8	2 5/8	1 9/16	15/16	3 3/16
3/4	6 1/4	2 7/8	1 3/4	1 1/8	3 13/16
1	7 1/4	3 1/4	2	1 3/8	4 1/2
1 1/4	7 7/16	3 5/16	2 3/16	1 3/4	5
1 1/2	8 3/16	5	2 7/16	1 15/16	5 7/16
2	9 3/16	6 1/8	3	2 7/16	6 3/8

Form 8TB

1/2	5 11/16	2 17/32	1 3/8	1	3 5/16
3/4	6 9/32	2 3/4	1 9/16	1 3/16	3 15/16
1	7 5/16	3 1/8	1 3/4	1 3/8	4 9/16
1 1/4	8 1/2	3 11/32	2 3/16	1 3/4	5 5/16
1 1/2	10 3/8	4 1/32	2 3/4	2 1/8	6 1/2
2	12 1/4	4 13/16	3 3/4	3	8 9/16

Mark 9TB

1/2	5	2 1/8	1 3/8	1 3/16	3 5/16
3/4	5 11/16	2 13/32	1 9/16	1 3/8	3 15/16
1	6 19/32	2 27/32	1 3/4	1 1/2	4 9/16
1 1/4	7 1/2	3 15/32	2 3/16	1 15/16	5 5/16
1 1/2	8 11/32	3 7/8	2 1/2	2 5/32	5 7/8
2	10 5/8	4 19/32	3 7/32	2 13/16	8 3/32

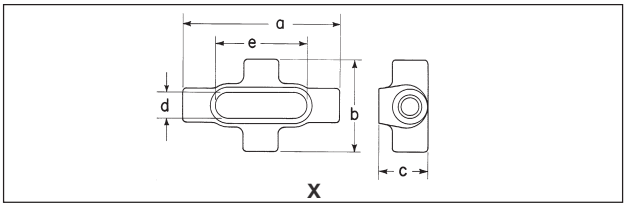

X

Form 7X

Size	a	b	c	d	e
1/2	5 5/8	3 5/16	1 3/4	15/16	3 3/16
3/4	6 1/4	3 1/2	2	1 1/8	3 13/16
1	7 1/4	4	2 1/4	1 3/8	4 1/2
1 1/4	7 7/16	4 1/8	2 5/16	1 3/4	5
1 1/2	8 3/16	4 5/8	2 9/16	1 15/16	5 7/16
2	9 3/16	5 3/16	3 1/8	2 7/16	6 3/8

Form 8X

1/2	5 11/16	2 29/32	1 3/4	1	3 5/16
3/4	6 9/32	3 1/16	2	1 3/16	3 15/16
1	7 5/16	3 1/2	2 1/4	1 3/8	4 9/16
1 1/4	8 1/2	4 1/8	2 5/8	1 3/4	5 5/16
1 1/2	10 3/8	5 1/4	2 15/32	2 1/8	6 1/2
2	12 1/4	6 1/4	3 9/16	3	8 9/16

Mark 9X

1/2	5 11/16	2 29/32	1 3/4	1	3 5/16
3/4	6 9/32	3 1/16	2	1 3/16	3 15/16
1	7 5/16	3 1/2	2 1/4	1 3/8	4 9/16

 Copyright© 2013 Eaton's Crouse-Hinds Business

Crouse-Hinds by EATON