# SONANCE

## PS-60XF 70V/100V TRANSFORMER


#### PS-60XF | SELL SHEET

#### ABOUT SONANCE PS-60XF TRANSFORMER

The Sonance PS-60XF Transformer allows the extensive range of Sonance 8 Ohm loudspeakers to be used in 70V/100V commercial installations.



#### **DIMENSIONS**

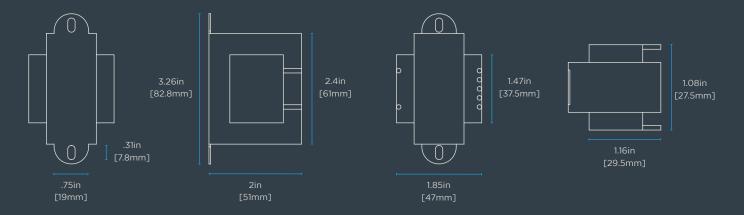

#### **FEATURES AND BENEFITS**

- Sonance's Laminated Core Technology (SLCT) Full-fidelity performance in 70V/100V
- Multiple tap settings 60W, 30W, 15W or 7.5W (in 70V only)
- Clearly labeled and color-coded wiring Quick and easy installation
- Versatile mounting Tabs for screws or zip-ties
- Compact form-factor Can be installed into a third-party small weatherproof enclosure for outdoor applications
- Compatible with Sonance's 8 Ohm loudspeakers Utilize the full range of high-performance and specialty in-wall and in-ceiling speakers

#### **SPECIFICATIONS**

Primary Voltage 70VPower Rating 60W

• Primary Taps (70V) 7.5W, 15W, 30W, 60W

• 100V Taps 15W, 30W, 60W,

Secondary Impedance 6 OhmsInsertion Loss 1.8dB

• Frequency Response 20Hz - 17kHz +/- 3dB


Lead Length 24" (609.6mm)Weight 1.19 lbs (540gm)

• Mounting Dimensions 3.52" W x 1.85" D x 2.01" H (89.4mm x 47mm x 51mm)


Mounting Method
Surface mounted using built in mounting holes (hardware not included)

#### **APPLICATION EXAMPLES**

Mariner + PS-60XF

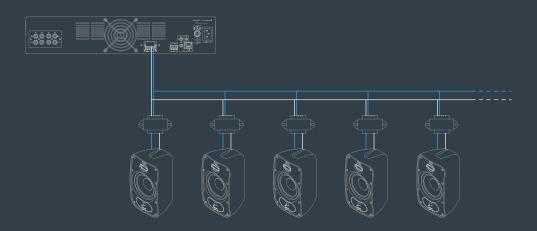

VP Extreme + PS-60XF

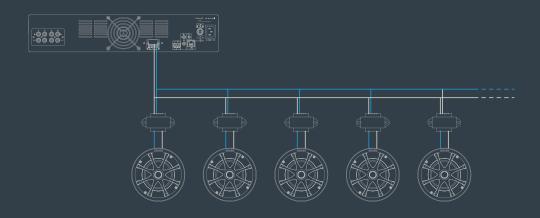

### SONANCE

©2020 Sonance. All rights reserved.

Sonance is a registered trademark of Dana Innovations.

Due to continuous product improvement, all features and specifications are subject to change without notice.

For the latest Sonance product specification information visit our website: www.sonance.com

SONANCE | 991 Calle Amanecer, San Clemente, CA 92673 USA

(949) 492-7777 | FAX: (949) 361-5151 | Technical Support: (949) 492-7777

www.sonance.com