

Yellow 77® Plus Wire Pulling Lubricant



- Rapid Glide™ polytetrafluoroethylene additive provides greater lubricity than other wax-based lubricants – great for tough pulls
- Safe to use with all cable types
- Clings to cable throughout long runs, even where moisture is present
- Remains stable in high temperatures – usable from 30°F to 190°F (-1°C to 88°C)
- Dries slowly to a thin, non-conductive film that won't harden in conduit
- Easy to apply by hand or brush
- Creamy texture applies easily and uniformly
- Homogeneous blend requires no mixing
- Won't dry out – surface coat forms to control evaporation
- Environmentally safe – non-toxic, non-flammable and non-corrosive

UL LISTED

Description	Cat. No.
1-qt. Squeeze bottle	**31-398**
1-gal. Bucket	**31-391**
5-gal. Bucket	**31-395**

ClearGlide™ Wire Pulling Lubricant



- Clear and colorless for quick and easy clean-up – great for indoor and retrofit pulls
- Exceptional lubricity for super-fast pulls
- Polymer-based formula is perfect for all electrical and datacomm applications
- Safe to use with all cable types
- Controlled evaporation rate is ideal for shorter runs
- Remains stable over wide temperature ranges – usable from 30°F to 180°F (-1°C to 82°C)
- Dries to a semi-fluid film that won't clog conduit
- Easy to apply by hand, brush or pump
- Environmentally safe – non-toxic, non-flammable and non-corrosive

UL LISTED

Description	Cat. No.
1-qt. Squeeze bottle	**31-388**
1-gal. Bucket	**31-381**
5-gal. Bucket	**31-385**
55-gal. Drum	**31-2143**

Yellow 77® Wire Pulling Lubricant



- The #1 brand of wire pulling lubricant since 1959 – the perfect general purpose lube
- Wax-based formula provides superior lubricity
- Safe to use with most cable types except low-density polyethylene and semi-conducting jackets
- Clings to cable throughout long pulls, even where moisture is present
- Won't break down or separate after repeated exposure to freezing temperatures
- Dries to a thin, non-conductive film
- Easy to apply by hand or brush
- Creamy texture applies easily and uniformly
- Homogeneous blend requires no mixing
- Won't dry out – surface coat forms to control evaporation
- Environmentally safe – non-toxic, non-flammable and non-corrosive

UL LISTED

Description	Cat. No.
1-qt. Squeeze bottle	**31-358**
1-gal. Bucket	**31-351**
5-gal. Bucket	**31-355**
55-gal. Drum	**31-365**

Aqua-Gel® II Cable Pulling Lubricant

- Polymer-based formula provides maximum tension reduction in high-stress electrical and communication cable-pulling operations
- Compatible with all cable types except composite rubber
- Cleans up easily with soap and water
- Clings to cable throughout long pulls
- Remains stable over wide temperature range — usable from 28°F to 180°F (-2°C to 88°C)
- Dries to a semi-fluid film that won't clog conduit
- Easy to apply by hand, brush or pump
- Environmentally safe – non-toxic, non-flammable and non-corrosive
- For outdoor use only



UL LISTED

Description	Cat. No.
1-qt. Squeeze bottle	31-378
1-gal. Bucket	31-371
5-gal. Bucket	31-375
55-gal. Drum	31-3855

Velocity™ Wire Pulling Lubricant

- High cling factor
- Maximum friction reduction
- Specification grade
- Compatible with all popular cable types
- Temperature stable
- Non-combustible residue
- Environmentally safe — non-toxic, non-flammable and non-corrosive



UL LISTED

Description	Cat. No.
1-qt. Squeeze bottle	31-276
1-gal. Bucket	31-277
5-gal. Bucket	31-278

Aqua-Gel® IIP Cable Pulling Lubricant

- Features the same excellent qualities as Aqua-Gel® II Cable Pulling Lubricant with a lower viscosity for easy pouring and pumping
- Pourable formula clings to cable – eliminates hand application for a cleaner and safer job
- Compatible with all cable types
- Cleans up easily with soap and water
- Environmentally safe – non-toxic, non-flammable and non-corrosive



UL LISTED

Description	Cat. No.
1-gal. Jug	31-421
5-gal. Bucket	31-425
55-gal. Drum	31-435

Aqua-Gel® CW Cable Pulling Lubricant

- Features the same excellent qualities as Aqua-Gel® II Cable Pulling Lubricant with a lower temperature range for use outdoors in cold weather
- Polymer-based, cold-weather formula remains stable in storage from -28°F to 190°F (-33°C to 82°C)
- Formulated for exterior use in cold weather conditions
- Cleans up easily with soap and water
- Clings to cable throughout long pulls
- Well-suited for hand or poured applications
- Environmentally safe — non-toxic, non-flammable and non-corrosive



Description	Cat. No.
1-qt. Squeeze bottle	31-298
1-gal. Jug	31-291
5-gal. Bucket	31-295

Conduit Measuring Tape



- Provides quick and accurate measurement of conduit runs
- Easy-to-read markings in sequential one-foot increments
- 160 lb. tensile strength
- Pulls rope through raceways without stretching
- Dispenser features built-in cutter, handle, non-skid base and adjustable reel tension
- Will not rot or mildew

Description	Cat. No.
Conduit Measuring Tape – 3,000 ft.	**31-347**

Foam Carriers



- Attach to a suitable line to serve as a piston – clears out water or debris as they travel through conduit
- Durable foam construction for repeated use and long life
- For use with any type of blower or vacuum system

Description	Qty.	Cat. No.
1/2 in. Foam Carrier	5/bag	**31-466**
3/4 in. Foam Carrier	5/bag	**31-467**
1 in. Foam Carrier	5/bag	**31-468**
1-1/4 in. Foam Carrier	3/bag	**31-469**
1-1/2 in. Foam Carrier	2/bag	**31-470**
2 in. Foam Carrier	1/bag	**31-471**
2-1/2 in. Foam Carrier	1/bag	**31-322**
3 in. Foam Carrier	1/bag	**31-323**
3-1/2 in. Foam Carrier	1/bag	**31-324**
4 in. Foam Carrier	1/bag	**31-325**
5 in. Foam Carrier	1/bag	**31-326**
6 in. Foam Carrier	1/bag	**31-327**

Line Packages



- One-piece pull line and foam tip unwind as they move through conduit
- One-piece construction for faster, easier use with no knots or foam carriers to retrieve
- Line tensile strength of 17 lbs.
- For use with any type of blower or vacuum system

Description	Color	Qty.	Cat. No.
Line Package, 1/2 in. x 75 ft.	Red	10/bag	**31-472**
Line Package, 1/2 in. x 150 ft.	Red	10/bag	**31-473**
Line Package, 3/4 in. x 200 ft.	Yellow	5/bag	**31-475**
Line Package, 3/4 in. x 300 ft.	Yellow	5/bag	**31-476**
Line Package, 3/4 in. x 450 ft.	Yellow	5/bag	**31-477**
Line Package, 1 in. x 200 ft.	White	5/bag	**31-479**
Line Package, 1 in. x 300 ft.	White	5/bag	**31-480**
Line Package, 1 in. x 450 ft.	White	5/bag	**31-481**



V-Notch Stripper

- Cuts copper or aluminum wire, solid or stranded
- Rotating cam wheel adjusts to strip 10-24 AWG wire
- Looping holes for solid wire
- Locking hasp

Description	Cat. No.
V-Notch Stripper 	**45-101**

7-in-1 Stripper

- Versatile, seven-function tool features precision-ground stripping blades, cushioned grips and plier nose
- Strips 8–16 AWG solid and 10–18 AWG stranded wire
- Crimps bare and insulated terminals for 10–22 AWG wire, RG-59 coax connectors and 7 to 8mm auto ignition connectors
- Cuts unhardened wire, bolts and screws (4-40, 6-32, 8-32, 10-24 and 10-32) and reforms threads
- Cuts stranded, solid, NM wire and U.F. wire to 8 AWG
- Reams and de-burrs conduit
- Gauges and loops wire

Description	Cat. No.
7-in-1 Stripper 	**45-777**

Data T®-Cutter Wire Cutter



- Cuts round communication cable and maintains cable geometry for better cable performance
- Cuts multi-pair cable up to .500 in. (12.7mm) and coaxial cable up to RG-9/U
- Suitable for soft cables (not ACSR)
- Steel reinforced center conductors can be trimmed with bolt cutting holes
- Cushioned comfort grip handles
- Locking latch keeps tool closed in pouch

Description	Cat. No.
Data T®-Cutter 	**45-074**

Combo Tool

- Convenient, four-function tool features precision-ground stripping holes and knife-to-anvil cutting blades
- Crimps bare and insulated terminals
- Strips 8–20 AWG solid and 10–22 AWG stranded wire
- Cuts unhardened bolts (4-40, 6-32, 8-32, 10-24 and 10-32) and reforms threads

Description	Cat. No.
Combo Tool 	**30-428**

Multi-Crimp Strip Tool

- Cuts wire
- Crimps insulated and non-insulated wires
- Cuts bolts
- Strips 10-22 AWG wire

Description	Cat. No.
Multi-Crimp Strip Tool 	**45-778**

T®-Cutter Wire Cutter

- Hardened steel, sheer-type blades
- Spring-loaded automatic opening
- Convenient plier nose for extra gripping strength
- Corrosion-resistant, black oxide finish
- Tough steel construction
- Locking tab keeps spring in place

Description	Wire Range	Cat. No.
T®-Cutter Wire Cutter 	Up to 1/2 in. O.D. fine-stranded wire and 10 AWG solid wire	**45-123**

Cable Ripper

- Slits Romex® wire sheathing before stripping wires
- Quick, clean and easy end or mid-run removal of jacket
- Convenient built-in wire gauge

Description	Cat. No.
Side Entry Cable Ripper 	**45-118RS**

Romex® is a registered trademark of Southwire Company.

T®-Cutter Lite Wire Cutter

In today's cutting-edge electronic production and assembly operations, the T®-Cutter Lite is a "must-have." Stranded or solid, copper or aluminum, this wire cutter cuts cleanly and accurately.

- Knife-type blade provides a shear-type cut
- Lightweight, compact design
- Perfect for copper and aluminum wire

Description	Cat. No.
T®-Cutter Lite Wire Cutter 	45-260

Coax Strip and Crimp Tool

- Precision, form-ground stripping holes remove outer jacket and insulation from RG-59 and RG-6 coaxial cable
- Durable blades cut copper-coated steel conductors
- Three crimping nests for crimping F-connectors and ring terminals



Description	Cat. No.
Coax Strip & Crimp Tool 	30-433
Coax Strip & Crimp Tool w/ten RG-6 F-Connectors	30-433F

Underground Feeder (UF) Cable Stripper

- Self-adjusting stripping blades automatically select proper position
- Strips 12/2 AWG solid to 14/2 AWG Underground Feeder (UF) Cable
- Strips Twin and Earth cable
- Open-throat construction allows unlimited strip length
- Neatly removes outer cable sheath and inner wire sheathing to desired lengths
- Lightweight, ergonomic design reduces user fatigue

Description	Cat. No.
Underground Feeder Cable Stripper 	45-235

Grip-N-Strip™ End Stripper

- Self-adjusting stripping blades automatically select proper position
- Strips 12 AWG solid to 20 AWG stranded PVC insulated wire
- Strip-length gauge
- Cuts up to 12 AWG solid wire
- Lightweight, ergonomic design reduces user fatigue
- Reinforced fiberglass construction
- Hardened steel blades for extra strength and longer life

Description	Cat. No.
Grip-N-Strip™ End Stripper 	45-227


Round Cable Slitting and Ringing Tools

- Cuts around cable jacket as well as slits the length of jacket for easy removal
- Use with single or multiple conductor cable up to 1.75 in. O.D.
- Blade adjusts for jacket thicknesses up to .125 in.
- Spare blade in handle base

Description	Cat. No.
Cable Stripper for 1/4 in. to 3/4 in. O.D. 	45-128
Cable Stripper for 3/4 in. to 1-1/2 in. O.D. 	45-129
Replacement Blades for 45-128 and 45-129 (2/pkg.)	L-7486

Stripmaster® Wire Strippers

- One-step stripping enhances productivity
- Spring-action motion increases leverage and reduces operator fatigue
- Precision-ground, knife-type blades provide clean, accurate stripping

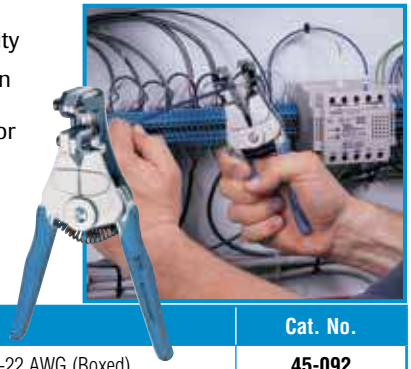

Description	Cat. No.
Stripmaster® Wire Stripper, 10-22 AWG (Boxed)	45-092
Stripmaster® Wire Stripper, 10-22 AWG (Clamshell)	45-292
Stripmaster® Wire Stripper, Coax RG-6	45-262

See Section C for complete Stripmaster® Wire Stripper line.