

OPL5

5" Straight Steel Pole for Area Lights

Product Description

The OPL5 pole series provides a durable and versatile foundation for outdoor area lighting installations. Available in both square and round profiles with mounting heights from 25Ft to 30Ft, OPL5 poles are manufactured from heavy-duty 11-gauge steel and feature reinforced hand-holes, galvanized anchor hardware, and a premium powder-coat finish. Multiple mounting configurations support a wide range of site lighting layouts, making the OPL5 an ideal solution for parking lots, campuses, pathways, and commercial outdoor environments.

- Construction**
- Straight steel square with 5" sides
 - General purpose poles for up to 30 foot mounting heights
 - Pole shaft is from weldable grade cold rolled, commercial quality carbon steel tubing conforming to ASTM-A500 grade B, 11 gauge
 - All welds conform to AWS D1.2 using ER70S-6 electrodes
 - Includes removable pole cap
 - Fine powder coat finish
 - Available in Bronze
 - Custom finishes available with cost adder

- Base Style**
- 4-Bolt Steel Plate Base Flange of fabricated hot rolled carbon steel conforming to ASTMA36 or equivalent (36 ksi minimum yield) with 2-piece Base Cover and attaching hardware.
 - Base cover of color matching ABS plastic

- Handhole**
- Reinforced 3"x5" handhole with cover. 1.5' from base.
 - Grounding Provision incorporating a tapped 1/2"-13NC hole welded to frame

- Anchorage**
- (4) L-shaped steel anchor bolts, conformed to AASHTO M314-90 Grade 55 with 10" of threaded end galvanized per ASTM A153
 - Galvanized steel hardware pack including:
 - (8) Hex nuts
 - (4) Lock washers
 - (8) Flat washers

- Mounting and installation**
- Use bolt template and anchor bolts for an easier installation


- Warranty**
- 5-year limited system warranty standard

Project

Catalog

Type


Date

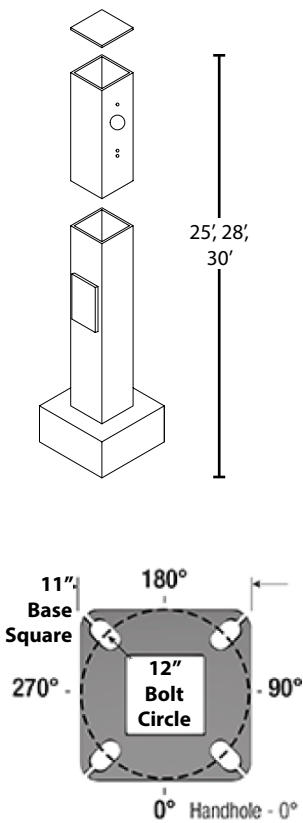

OPL5
25, 28 & 30 foot
Straight Square Steel Pole



Pole Mounting Holes

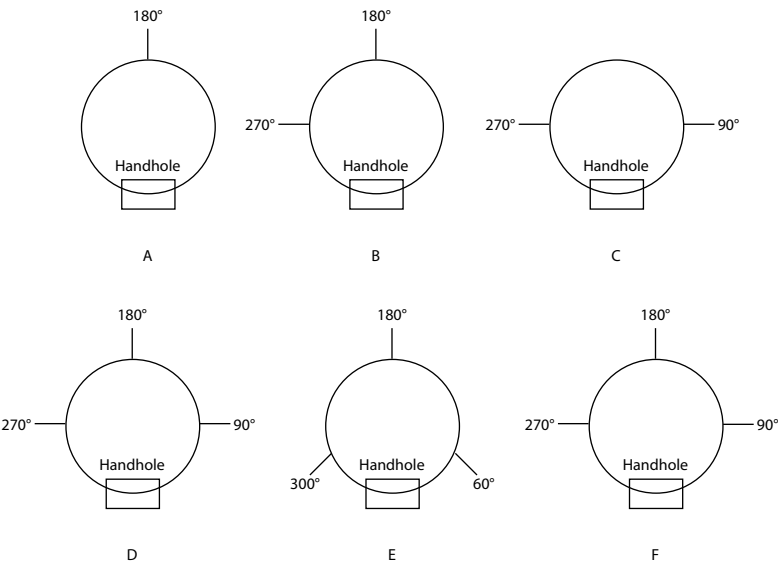

Ordering Information					Example: OPL51RD25CBZ
Series	Version	Shape	Height	Mounting Holes	Color
OPL5	1	SQ (Square)	25 (25' height)	Blank (None)	BZ (Bronze)
			28 (28' height)	A (One Mounting Hole)	WH (White)
			30 (30' height)	B (Two 90° Mounting Holes)	BK (Black)
				C (Two 180° Mounting Holes)	GA (Grey Aluminum)*
				D (Three 90° Mounting Holes)	
				E (Three 120° Mounting Holes)	
				F (Four Mounting Holes)	
				G (2" Slipfitter)	
				H (Top-mount Arm)	

Specifications and dimensions subject to change without notice.
For custom finishes consult factory
No minimum order quantity
6-8 week lead time