



Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 1 Glass Door Reach-In Refrigerator, Bottom Mount

MVR-23GDHC



Ideal for showcasing your goods in restaurants, cafes, bakeries, catering businesses and more, the Maxx Cold V-Series 1 Glass Door Reach-In Refrigerator is a smart investment. Offering ample storage space for perishable goods, ingredients, prepared foods and beverages, this commercial reach-in refrigerator measures 27"W and has a storage capacity of 19 cubic feet. It is constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior.

FEATURES AND CONSTRUCTION

- Reach-in refrigerator with one self-closing, locking, dual-pane glass door with an easy-to-grip handle
- Constructed of a durable, easy-to-clean stainless steel exterior and interior
- Includes 4 adjustable heavy-duty wire shelves
- Automatic defrost system
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters for easy mobility in your commercial kitchen
- Automatic defrost system
- Temperature range 34°F to 40°F (1°C to 4°C)
- LED temperature display is easy to read
- Automatic interior lighting

ELECTRIC

115V / 60Hz / 1Ph
Cord Length (Inches): 98.5"
Plug Type: NEMA 5-15P
Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

6 Months Parts and Labor, 1 Year Compressor Warranty

For more information, contact:
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



NOMINAL STORAGE CAPACITY

Cubic Feet: 19.14 cu. ft.

TEMPERATURE


- Holding Temperature (Fahrenheit): 32° - 100°
- Efficient forced-air refrigeration system

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity



Maxx Cold V-Series 1 Glass Door Reach-In Refrigerator, Bottom Mount

MVR-23GDHC

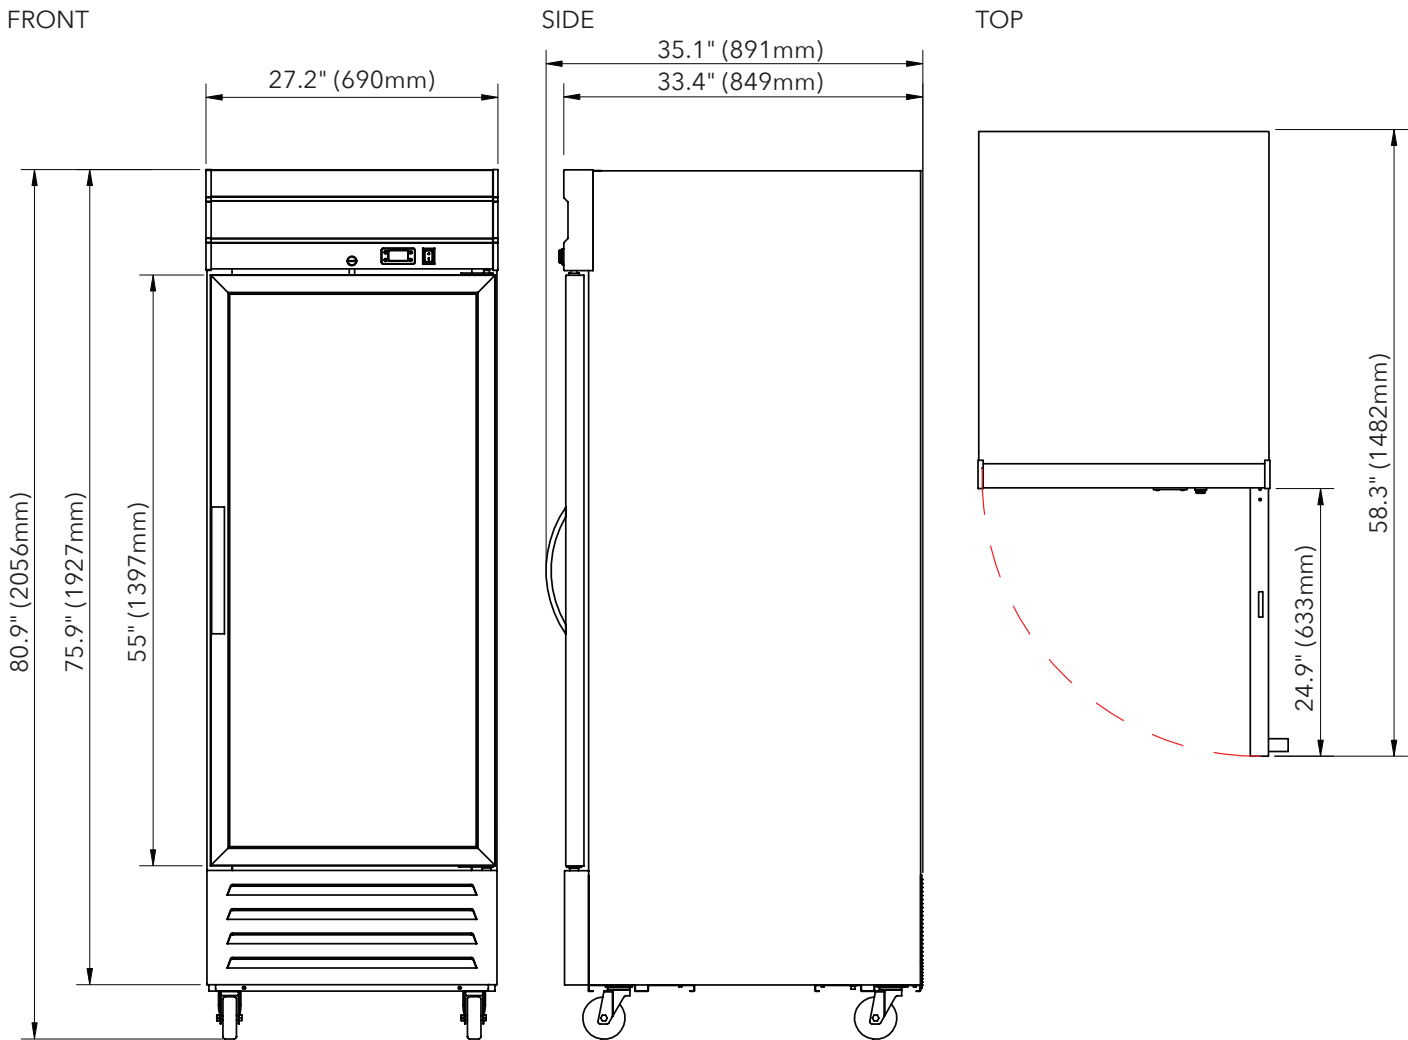

Reach-In

Doors	Shelves	Amps	Refrigerant	Dimensions	Item Weight lbs	Shipping Weight lbs
1	3	2.2A	R600A 1.76 oz	35.10" x 27.20" x 80.90"	220.0	277.0

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.