


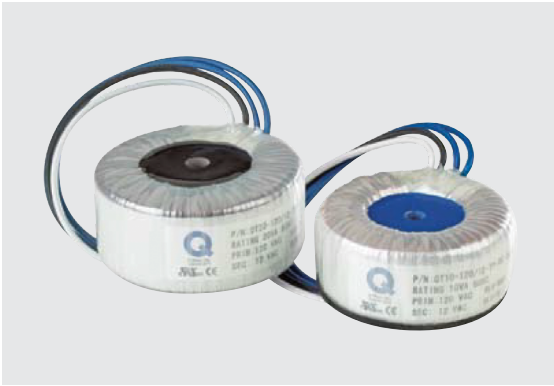

MAGNETIC TRANSFORMER

10W & 20W


HIGHLIGHTS

- Suitable for LED
- 10 and 20 watts, 120V and 277V primary to 12VAC secondary magnetic
- Must be mounted in a listed weatherproof enclosure
- Dimmable by using a magnetic low voltage dimmer switch

Specifications

Diameter:	TM10: Ø2-3/8" (61 mm)
	TM20: Ø2-1/2" (64 mm)
Width:	TM10: Ø1-1/16" (27 mm)
	TM20: Ø1-1/8" (29 mm)
Weight	2 lbs (0.9 kg)

DIMENSIONS



ORDERING INFORMATION

EXAMPLE: TM20 277

Series		Voltage	
TM10	Transformer, 12Vac Magnetic 10W	120	120 Volt ac
TM20	Transformer, 12Vac Magnetic 20W	277	277 Volt ac

SPECIFICATIONS AND FEATURES

MATERIAL: Toroidal transformer.

VOLTAGE: 120 volt or 277 volt.

FEATURES: Power rating: 10 watt or 20 watt
Primary Voltage: 120 volt or 277 volt.
Secondary Voltage: 12 volt. Installation: Class B
Dimmable: Fully dimmable with magnetic low voltage dimmer.

GENERAL: Transformers must be placed in a sealed enclosure when used in a wet location. TM-10 will fit into a standard 4 inch round wet location J-box. TM-20 requires a double depth 4 inch round J-box (extension ring).

WARRANTY: 1-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/support/customer-support/terms-and-conditions
Consult factory for details.

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.