

SPECIFICATIONS - W54198

Capacity:..... Bulk - 3 oz. (88.7ml)
 Cartridge - 3 oz. (88.7ml)
 Load Type..... 2 Way
 Develops up to:..... 10,000 PSI
 Delivers:..... 1 oz. / 28 Strokes (29.5ml)
 Hose / Length:..... 5 in. Rigid / 12 in. Flex 1/8 in. NPT

SPECIFICATIONS - W54200

Capacity:..... Bulk - 3 oz. (88.7ml)
 Cartridge - 3 oz. (88.7ml)
 Load Type..... 2 Way
 Develops up to:..... 10,000 PSI
 Delivers:..... 1 oz. / 28 Strokes (29.5ml)
 Hose / Length:..... 5 in. Rigid / 1/8 in. NPT

SPECIFICATIONS - W54205

Capacity:..... Bulk - 3 oz. (88.7ml)
 Cartridge - 3 oz. (88.7ml)
 Load Type..... 2 Way
 Develops up to:..... 10,000 PSI
 Delivers:..... 1 oz. / 28 Strokes (29.5ml)
 Hose / Length:..... 5 in. Rigid / 12 in. 1/8 in. NPT

GREASE CARTRIDGE LOADING

NOTE: This is a basic instruction manual which covers various models of grease guns. The illustrations below may not depict your specific gun exactly.

1. Rotating counter clockwise, unscrew Head Cap from gun Barrel. (Fig. 1)



NOTE: Because they lack lubrication on the rubber plunger, new grease guns may be difficult to load with grease cartridges the first time. Apply a liberal coating of grease to plunger when using gun for the first time.

This grease gun requires a 3 oz. grease cartridge.



2. Draw handle back fully so that the plunger rod catches and locks into place. (Fig. 2)

CAUTION: Depressing the lock release when empty causes the handle to snap back quickly.

3. After removing the plastic cap from the grease cartridge, apply a small amount of grease to the inside edge of the cartridge. This will make insertion of the plunger easier. (Fig. 3)
4. Push grease cartridge into gun barrel completely, until metal edge tightly seals on top of the grease gun barrel. Detach flip-top seal from cartridge. (Fig. 4)
5. Screw on head cap approximately two turns, being sure not to tighten. Release plunger rod from its locked position and push in. Push on plunger rod handle to force plunger into cartridge. At the same time, pump the lever or handle to release trapped air. When grease comes through vents and the head of the gun, fully tighten the head cap to the barrel.
6. As soon as the gun is pumping grease, carefully depress the lock release and push plunger rod back into gun.

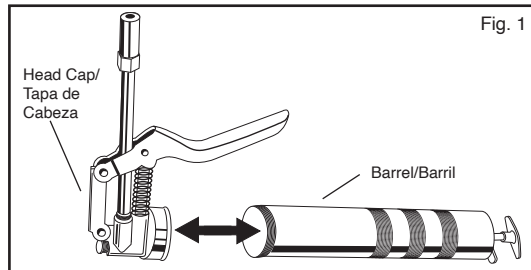

CARGA DE CARTUCHO DE GRASA

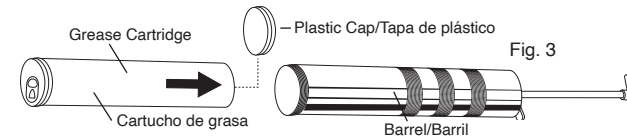

NOTA: Este es un manual de instrucciones basico que cubre varios modelos de pistolas de grasa. Las ilustraciones de abajo pueden no ser exactamente iguales que su pistola especifica.

1. Desatornille la tapa del barril de la pistola girando en dirección opuesta a las manecillas del reloj. (Fig. 1)

NOTA: Debido a la escasa lubricacion del piston de goma, puede ser dificil llenar la primera vez de grasa los cartuchos. Aplique una capa suficiente de grasa a el piston cuando use la pistola por primera vez. **Esta pistola de grasa requiere un cartucho de grasa de 85 g.**

2. Jale completamente el mango hacia atras para que la cabeza del piston se asegure en su lugar. (Fig. 2)

PRECAUCIÓN: Si se jala el sujetador del seguro al estar vacio, causa que el mango haga repentinamente para atras.


3. Despues de remover la tapa de plastico del cartucho de grasa, aplique una pequeña cantidad de grasa al borde interior del cartucho. (Fig. 3)
4. Empuje el cartucho de grasa hacia el barril completamente, hasta que el metal selle con la parte superior de la pistola de grasa. Retire le sello de arriba del cartucho. (Fig. 4)
5. Atornille la cabeza de la tapa aproximadamente dos vueltas, asegurandose que no apriete. Saque el piston de su posición asegurada. Empuje el mango para forzar la cabeza del piston contra el cartucho. Al mismo tiempo, bombee el mango para liberar el aire. Cuando la grasa salga de los extremos de la pistola, Apriete la cabeza de la tapa contra al barril.
6. Al momento que la pistola bombee grasa, cuidadosamente jale el sujetador del seguro y empuje la cabeza del piston de vuelta en la pistola.

SUCTION FILLING / LLENADO DE SUCCIÓN

NOTE: Used cartridges must be removed prior to suction filling.

1. Remove the gun head cap from the barrel.
2. Submerge open end of the barrel into grease bucket. Be sure the plunger handle is depressed completely. Grasp the barrel firmly and pull back slowly on the plunger handle. Be sure the mouth of the barrel is always under the surface so that air is not transferred into the barrel. (Figure 5)
3. Loading is complete when plunger rod is fully extended.
4. Reattach the gun head cap to the barrel. Depress lock release and push the plunger rod back into the gun.

NOTE: Grease guns may lose their prime on occasion, because of air pockets in the grease. If this occurs, remove the trapped air by bleeding the head cap and resume pumping.



NOTA: Los cartuchos usados se deben remover antes de llenar a succión.

1. Remueva la tapa de la cabeza de la pistola del barril.
2. Sumerja la parte abierta del barril en el cubo de grasa. Aseruse que el mango del piston esta completamente suelto. Sujete el barril firmemente y jale despacio el mango del piston. Asegurese que la boca del barril este siempre sumergida en el cubo para que no pase aire a el barril. (Fig. 5)
3. El relleno se termina cuando la barra del piston esta completamente extendida.
4. Ponga de nuevo la tapa de la cabeza de la pistola a el barril. Quite el sujetador del seguro y ponga la barra del piston de nuevo en la pistola.

NOTA: En ocasiones las pistolas de grasa pueden perder su fuerza debido a bolsas de aire en la grasa, si esto ocurre, remueva el aire atrapado purgando la tapa de la cabeza y siga bombeando.

SAFETY GUIDELINES / DEFINITIONS

This instruction manual is intended for your benefit. Please read and follow the safety, installation, maintenance and troubleshooting steps described within to ensure your safety and satisfaction. The contents of this instruction manual are based upon the latest product information available at the time of publication. The manufacturer reserves the right to make product changes at any time without notice.

▲ **WARNING:** Read and understand this entire instruction manual before attempting to assemble, install, operate or maintain this product. Failure to comply with the instructions may result in serious personal injury and/or property damage!

The following signal words are used to emphasize safety warnings that must be followed when using this product:

▲ **DANGER:** Indicates an imminently hazardous situation that, if not avoided, WILL result in death or serious injury.

▲ **WARNING:** Indicates a potentially hazardous situation that, if not avoided, COULD result in death or serious injury.

▲ **CAUTION:** Indicates a potentially hazardous situation that, if not avoided, MAY result in minor or moderate injury.

▲ **NOTICE** Indicates important information, which if not followed, MAY cause damage to equipment.

LIMITED WARRANTY

PERFORMANCE TOOL® extends only the following warranties, and only to original retail purchasers. These warranties give specific legal rights. Except where prohibited by local law, the law of the State of Washington governs all warranties and all exclusions and limitations of warranties and remedies. There may be other rights which vary from state to state.

PERFORMANCE TOOL® warrants the product to be free from defects in materials and workmanship under normal use and service. A defective product may be returned for a free replacement within 90 days from the date of purchase, provided that product is returned to place of purchase immediately after discovery of defect. After 90 days and up to one year from date of purchase, PERFORMANCE TOOL® will replace at no charge any parts which our examination shall disclose to be defective and under warranty. These warranties shall be valid only when a sales receipt showing the date of purchase accompanies the defective product or defective part (s) being returned. For part (s) after 90 days, please remit your request, postage prepaid to:

PERFORMANCE TOOL, P.O. Box 88259 Tukwila, WA 98138

These warranties exclude blades, bits, punches, dies, bulbs, fuses, hoses, and other consumables which must be replaced under normal use and service. These warranties shall not apply to any product or part which is used for a purpose for which it is not designed, or which has been repaired or altered in any way so as to affect adversely its performance or reliability, nor shall these warranties apply to any product or part which has been subject to misuse, neglect, accident or wear and tear incident to normal use and service.

PERFORMANCE TOOL® does not authorize any other person to make any warranty or to assume any liability in connection with its products.

Except for warranties of title and the limited express warranties set forth above, PERFORMANCE TOOL® makes no express or implied warranties of any kind with respect to its products. In particular, PERFORMANCE TOOL® makes no implied warranty of merchantability and no implied warranty of fitness for any particular purpose, except that for goods purchased primarily for personal, family or household use and not for commercial or business use, PERFORMANCE TOOL® makes an implied warranty of merchantability (and, if otherwise applicable, an implied warranty of fitness for a particular purpose), but only for the particular qualities or characteristics, and for the duration, expressly warranted above.

The laws on limitation of implied warranties may differ from state to state, so the above limitations may not apply in all cases.

PERFORMANCE TOOL® shall not be liable for consequential, incidental or special damages resulting from or in any manner related to any product, or to the design, use, or any inability to use the product. The sole and exclusive remedy for a defective product or part shall be the repair, or replacement thereof as provided above. The laws on limitation of remedies or on consequential, incidental or special damages may vary from state to state, so the above limitations may not apply in all cases.

© Copyright 2021 WILMAR CORPORATION, P.O. Box 88259 Tukwila, WA 98138

MINI GREASE GUN

Item Number(s): W54198 / W54200 / W54205

OWNER'S MANUAL / INSTRUCTIVO



WARNING!

READ, UNDERSTAND AND FOLLOW ALL INSTRUCTIONS AND WARNINGS BEFORE OPERATING THIS TOOL. FAILURE TO DO SO MAY RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

PT[®]
Performance Tool

Performance Tool[®]