


NOTES:

1. MATERIALS:  
FRONT BODY: BERYLLIUM COPPER PER ASTM B196  
ALL OTHER METAL PARTS: BRASS PER ASTM B16  
INSULATOR: TEFLON PER ASTM D1710
2. FINISH:  
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER  
.000050 MIN. NICKEL PER QQ-N-290  
CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER  
.000050 MIN. NICKEL PER QQ-N-290  
CAP: .000005 MIN. GOLD PER MIL-G-45204 OVER  
.000050 MIN. NICKEL PER QQ-N-290
3. ELECTRICAL:  
IMPEDANCE: 50 OHMS NOMINAL
4. FOR USE WITH .141 DIA. SEMI-RIGID CABLE OR EQUIVALENT.
5. FOR CABLING PROCEDURES USE CAP 5-08 WITH TRIMMING DIMENSIONS SHOWN.

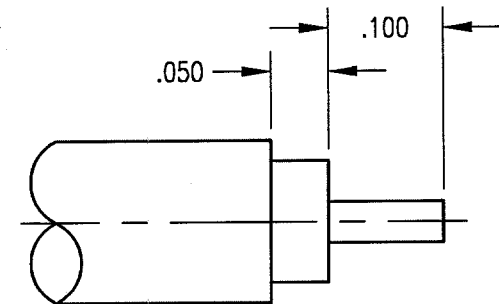


CABLE TRIMMING DIMENSIONS

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR	MATERIAL
B	NPR 1383	6/7/99	JED		
REVISIONS					

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE NOMINAL AND  
FOR REFERENCE ONLY.  
DIMENSIONS IN INCHES  
DO NOT SCALE PRINT

<b>SALES DRAWING</b>					
		<b>RETCONN</b>			
A SUBSIDIARY OF SPM 199 W. PEARL ROAD TORRINGTON, CT. 06790 TEL (860) 489-1220 FAX (860) 496-7307					
TITLE <b>MCX RIGHT ANGLE PLUG</b>					
DRAWN JED	DATE 6/7/99	CHECKED TLB	SCALE 6:1	FSCM	RE
APPR. <i>[Signature]</i>	DWG. NO. 452-500-1410H				